

## Features

- Ultra High Efficiency (Up to 93.5%)
- Full Power at Wide Output Current Range (Constant Power)
- 0-5V/0-10V/PWM/Timer Dimmable
- Input Surge Protection: DM 6kV, CM 10kV
- All-Around Protection: OVP, SCP, OTP
- IP67 and UL Dry / Damp / Wet Location
- SELV Output
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- UL Type TL (Temperature Limited)
- 7 Years Warranty



## Description






The EUG-150SxxxDT series is a 150W, constant-current, programmable LED driver that operates from 90-305 Vac input with excellent power factor. It is created for many lighting applications including high bay, tunnel and roadway lights. The high efficiency of these drivers and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, output over voltage, short circuit, and over temperature.

## Models

Adjustable Output Current Range (mA)	Full-Power Current Range (mA) <sup>(1)</sup>	Default Output Current (mA)	Output Voltage Range (Vdc)	Max. Output Power (W)	Typical Efficiency <sup>(2)</sup>	Typical Power Factor		Model Number <sup>(3)(4)</sup>
						120Vac	220Vac	
45-700	450-700	530	117-333	150	93.5%	0.99	0.96	EUG-150S070DT
70-1050	700-1050	700	75-214	150	93.5%	0.99	0.96	EUG-150S105DT
140-2100	1400-2100	1400	38-107	150	92.5%	0.99	0.96	EUG-150S210DT <sup>(5)</sup>
245-3500	2450-3500	3150	22-61	150	92.0%	0.99	0.96	EUG-150S350DT <sup>(5)</sup>
385-5600	3850-5600	4200	14-39	150	92.0%	0.99	0.96	EUG-150S560DT <sup>(5)</sup>

- Notes:** (1) Output current range with constant power at 150W  
 (2) Measured at 100% load and 220Vac input (see below "General Specifications" for details).  
 (3) Certified input voltage range: UL, FCC 100-277Vac or 100-300Vdc; otherwise 100-240Vac or 100-250Vdc (except KS)  
 (4) All the models are certificated to CE and KS, except EUG-150S070DT  
 (5) SELV Output.

## I-V Operation Area

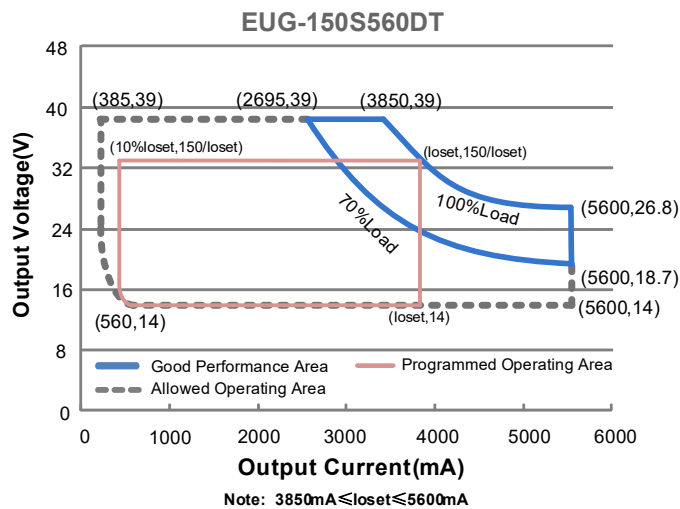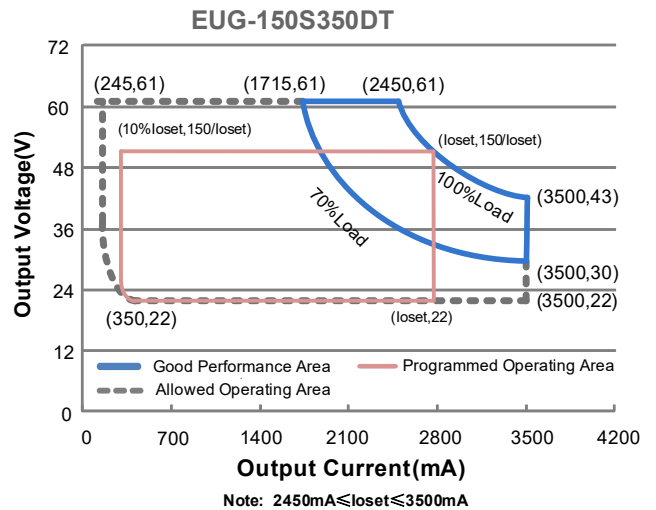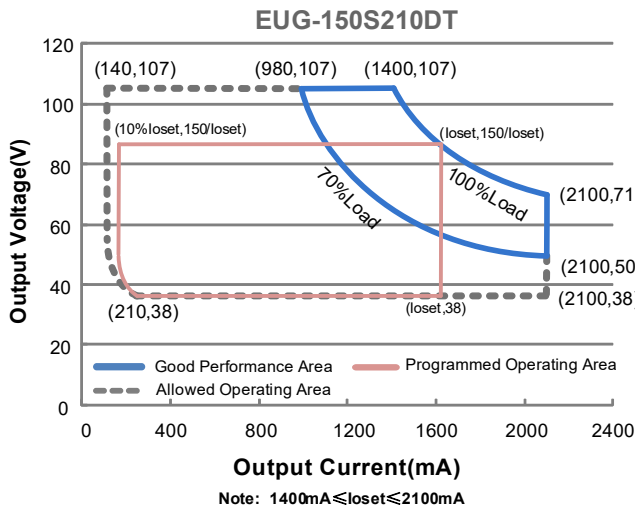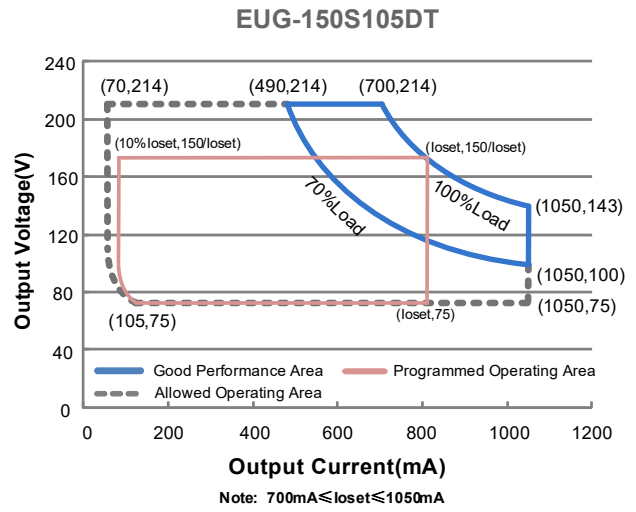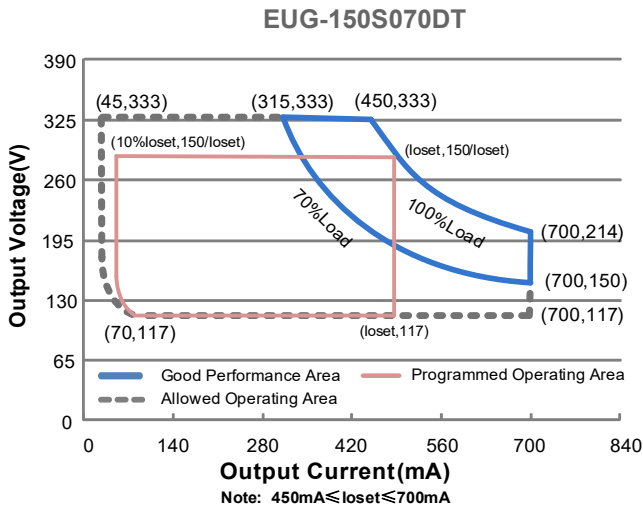

## Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input AC Voltage	90 Vac	-	305 Vac	
Input DC Voltage	100 Vdc	-	300 Vdc	
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	0.75 MIU	UL 8750; 277Vac/ 60 Hz
	-	-	0.70 mA	IEC 60598-1; 240Vac/ 60 Hz
Input AC Current	-	-	1.87 A	Measured at 100% load and 100 Vac input.
	-	-	0.81 A	Measured at 100% load and 220 Vac input.
Inrush Current(I <sup>2</sup> t)	-	-	1.98 A <sup>2</sup> s	At 220Vac input, 25°C cold start, duration=712 μs, 10%I <sub>pk</sub> -10%I <sub>pk</sub> . See Inrush Current Waveform for the details.
PF	0.9	-	-	At 100-277Vac, 50-60Hz, 70%-100% Load (105-150 W)
THD	-	-	20%	
THD	-	-	10%	At 220-240Vac, 50-60Hz, 75%-100% Load (112.5-150 W)

## Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%loset	-	5%loset	At 100% load condition
Output Current Setting(loset) Range				
EUG-150S070DT	45 mA	-	700 mA	
EUG-150S105DT	70 mA	-	1050 mA	
EUG-150S210DT	140 mA	-	2100 mA	
EUG-150S350DT	245 mA	-	3500 mA	
EUG-150S560DT	385 mA	-	5600 mA	
Output Current Setting Range with Constant Power				
EUG-150S070DT	450 mA	-	700 mA	
EUG-150S105DT	700 mA	-	1050 mA	
EUG-150S210DT	1400 mA	-	2100 mA	
EUG-150S350DT	2450 mA	-	3500 mA	
EUG-150S560DT	3850 mA	-	5600 mA	
Total Output Current Ripple (pk-pk)	-	5%l <sub>o</sub> max	10%l <sub>o</sub> max	At 100% load condition, 20 MHz BW
Output Current Ripple at < 200 Hz (pk-pk)	-	2%l <sub>o</sub> max	-	At 100% load condition. Only this component of ripple is associated with visible flicker.
Startup Overshoot Current	-	-	10%l <sub>o</sub> max	At 100% load condition
No Load Output Voltage				
EUG-150S070DT	-	-	370 V	
EUG-150S105DT	-	-	235 V	
EUG-150S210DT	-	-	120 V	
EUG-150S350DT	-	-	75 V	
EUG-150S560DT	-	-	48 V	

## Output Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Line Regulation	-	-	±0.5%	Measured at 100% load
Load Regulation	-	-	±1.5%	
Turn-on Delay Time	-	-	1.0 s	Measured at 120Vac input, 70%-100% Load
	-	-	0.5 s	Measured at 220Vac input, 70%-100% Load
Temperature Coefficient of I <sub>o</sub> set	-	0.03%/°C	-	Case temperature = 0°C ~T <sub>c</sub> max
12V Auxiliary Output Voltage	10.8 V	12 V	13.2 V	
12V Auxiliary Output Source Current	0 mA	-	20 mA	Return terminal is "Dim-"

## General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 120 Vac input: EUG-150S070DT				Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
I <sub>o</sub> = 450 mA	87.5%	90.5%	-	
I <sub>o</sub> = 700 mA	87.0%	90.0%	-	
EUG-150S105DT				
I <sub>o</sub> = 700 mA	88.0%	91.0%	-	
I <sub>o</sub> =1050 mA	87.0%	90.0%	-	
EUG-150S210DT				
I <sub>o</sub> =1400 mA	87.0%	90.0%	-	
I <sub>o</sub> =2100 mA	87.0%	90.0%	-	
EUG-150S350DT				
I <sub>o</sub> =2450 mA	87.0%	90.0%	-	
I <sub>o</sub> =3500 mA	86.5%	89.5%	-	
EUG-150S560DT				
I <sub>o</sub> =3850 mA	86.5%	89.5%	-	
I <sub>o</sub> =5600 mA	85.0%	88.0%	-	
Efficiency at 220 Vac input: EUG-150S070DT				Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
I <sub>o</sub> = 450 mA	91.5%	93.5%	-	
I <sub>o</sub> = 700 mA	90.5%	92.5%	-	
EUG-150S105DT				
I <sub>o</sub> = 700 mA	91.5%	93.5%	-	
I <sub>o</sub> =1050 mA	90.5%	92.5%	-	
EUG-150S210DT				
I <sub>o</sub> =1400 mA	90.5%	92.5%	-	
I <sub>o</sub> =2100 mA	90.0%	92.0%	-	
EUG-150S350DT				
I <sub>o</sub> =2450 mA	90.0%	92.0%	-	
I <sub>o</sub> =3500 mA	90.0%	92.0%	-	
EUG-150S560DT				
I <sub>o</sub> =3850 mA	90.0%	92.0%	-	
I <sub>o</sub> =5600 mA	88.5%	90.5%	-	

## General Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 277 Vac input: EUG-150S070DT				Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
I <sub>o</sub> = 450 mA	92.0%	94.0%	-	
I <sub>o</sub> = 700 mA	91.0%	93.0%	-	
EUG-150S105DT				
I <sub>o</sub> = 700 mA	91.5%	93.5%	-	
I <sub>o</sub> =1050 mA	91.0%	93.0%	-	
EUG-150S210DT				
I <sub>o</sub> =1400 mA	91.0%	93.0%	-	
I <sub>o</sub> =2100 mA	90.0%	92.0%	-	
EUG-150S350DT				
I <sub>o</sub> =2450 mA	90.5%	92.5%	-	
I <sub>o</sub> =3500 mA	90.5%	92.5%	-	
EUG-150S560DT				
I <sub>o</sub> =3850 mA	90.0%	92.0%	-	
I <sub>o</sub> =5600 mA	88.5%	90.5%	-	
MTBF	-	271,000 Hours	-	Measured at 220 Vac input, 80%Load and 25 °C ambient temperature (MIL-HDBK-217F)
Lifetime	-	99,000 Hours	-	Measured at 220 Vac input, 80%Load and 70 °C case temperature; See lifetime vs. Tc curve for the details
Operating Case Temperature for Safety T <sub>c_s</sub>	-40°C	-	+90°C	
Operating Case Temperature for Warranty T <sub>c_w</sub>	-40°C	-	+75°C	Case temperature for 7 years warranty. Please see <i>Inventronics Warranty Statement for complete details.</i>
Operating Case Temperature for Type TL T <sub>c_TL</sub>	-40°C	-	+78°C	
Storage Temperature	-40°C	-	+85°C	Humidity: 5%RH to 100%RH
Dimensions				With mounting ear
Inches (L × W × H)	7.40 × 2.66 × 1.56			8.23 × 2.66 × 1.56
Millimeters (L × W × H)	188 × 67.5 × 39.7			209 × 67.5 × 39.7
Net Weight	-	1100 g	-	

## Dimming Specifications

Parameter	Min.	Typ.	Max.	Notes
Absolute Maximum Voltage on the V <sub>dim</sub> (+) Pin	-20 V	-	20 V	
Source Current on V <sub>dim</sub> (+)Pin	200 uA	300 uA	450 uA	V <sub>dim</sub> (+) = 0 V

## Dimming Specifications (Continued)

Parameter		Min.	Typ.	Max.	Notes
Dimming Output Range	EUG-150S070DT EUG-150S105DT EUG-150S210DT EUG-150S350DT EUG-150S560DT	10%loset	-	loset	450 mA ≤ loset ≤ 700 mA 700 mA ≤ loset ≤ 1050 mA 1400 mA ≤ loset ≤ 2100 mA 2450 mA ≤ loset ≤ 3500 mA 3850 mA ≤ loset ≤ 5600 mA
	EUG-150S070DT EUG-150S105DT EUG-150S210DT EUG-150S350DT EUG-150S560DT	45 mA 70 mA 140 mA 245 mA 385 mA	-	loset	45 mA ≤ loset < 450 mA 70 mA ≤ loset < 700 mA 140 mA ≤ loset < 1400 mA 245 mA ≤ loset < 2450 mA 385 mA ≤ loset < 3850 mA
Recommended Dimming Range for 0-5 V		0 V	-	5 V	Dimming mode set to 0-5V in Inventronics Programing Software.
Recommended Dimming Range for 0-10 V		0 V	-	10 V	Default 0-10V dimming mode with positive logic.
PWM_in High Level		3 V	-	10 V	Dimming mode set to PWM in Inventronics Programing Software.
PWM_in Low Level		-0.3 V	-	0.6 V	
PWM_in Frequency Range		200 Hz	-	2 KHz	
PWM_in Duty Cycle		1%	-	99%	

## Safety & EMC Compliance

Safety Category	Standard
UL/CUL	UL 8750,CAN/CSA-C22.2 No. 250.13
CE	EN 61347-1, EN 61347-2-13
CB	IEC 61347-1, IEC 61347-2-13
KS	KS C 7655
EMI Standards	Notes
EN IEC 55015/KS C 9815 <sup>(1)</sup>	Conducted emission Test &Radiated emission Test
EN IEC 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
FCC Part 15 <sup>(1)</sup>	ANSI C63.4 Class B
	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired Operation.
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS


## Safety & EMC Compliance (Continued)

EMS Standards	Notes
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: Differential Mode 6 kV, Common Mode 10 kV <sup>(2)</sup>
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547/KS C 9547	Electromagnetic Immunity Requirements Applies To Lighting Equipment


**Note:** (1) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.

(2) To perform electric strength (hi-pot) testing, the “GDT ground disconnect” (nut and metal lock sheet) on the driver end-cap should be removed temporarily to prevent the internal gas discharge tube from conducting (as allowed by IEC 60598-1 Clause 10.2). After testing is completed, these items must be reinstalled to restore line-to-earth surge protection and secure the end cap.







## Lifetime vs. Case Temperature




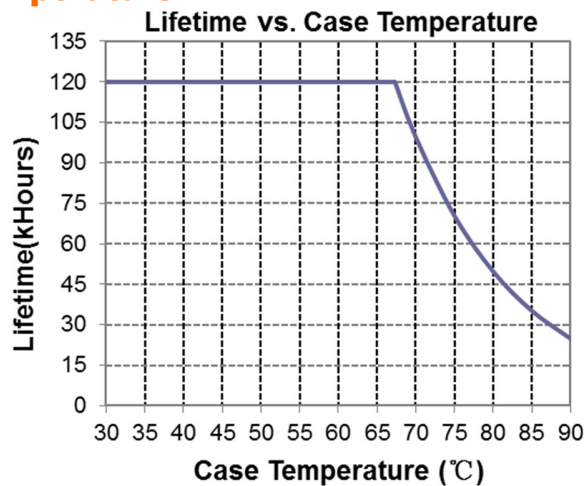


## Inrush Current Waveform

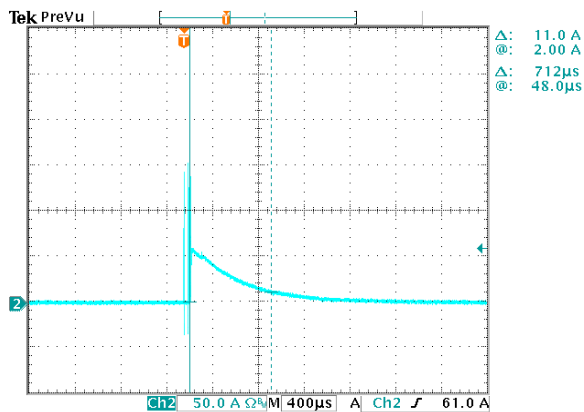


## Efficiency vs. Load

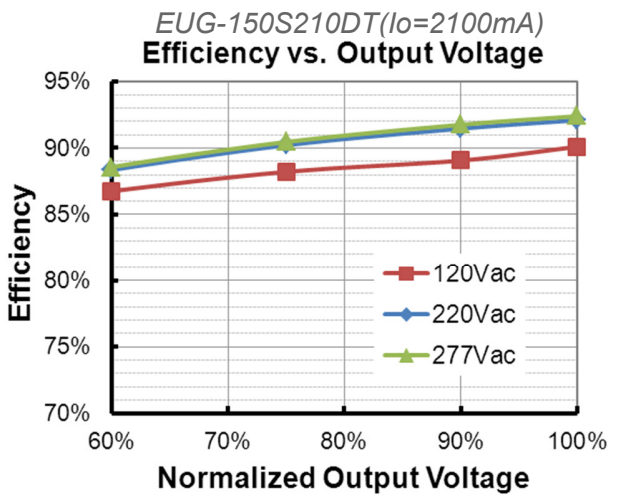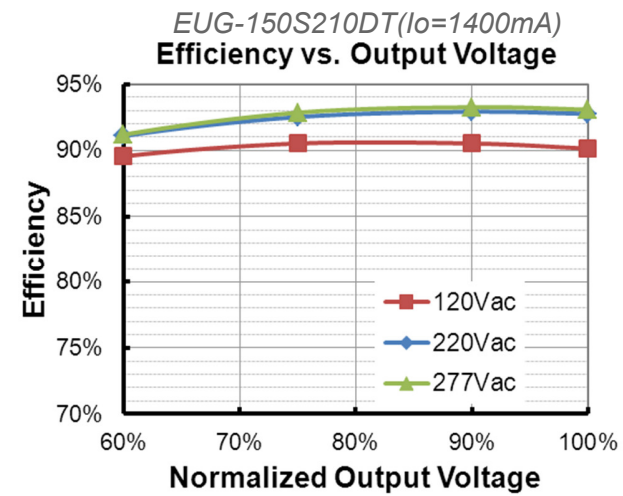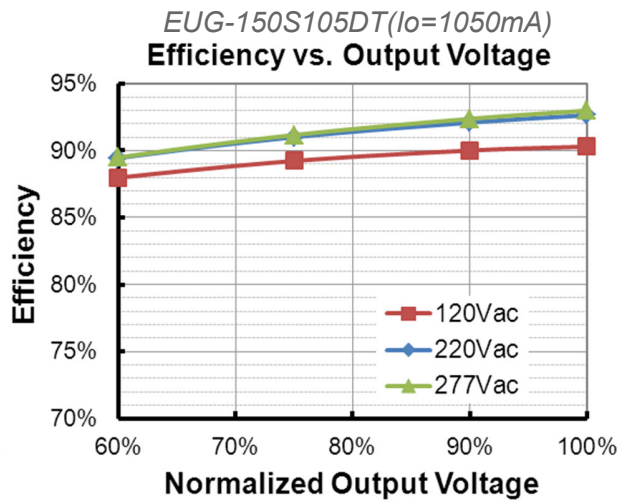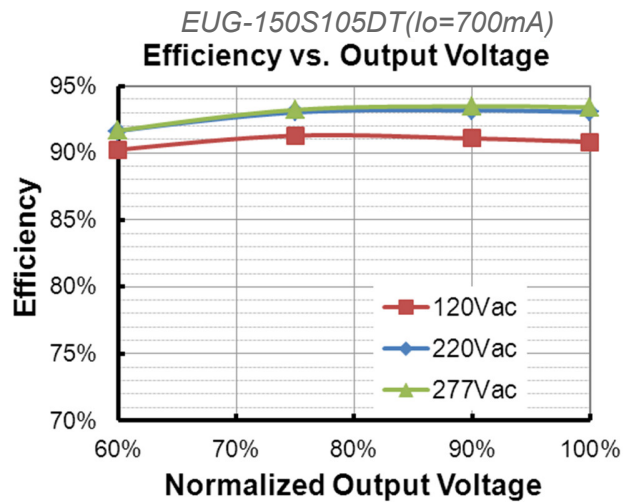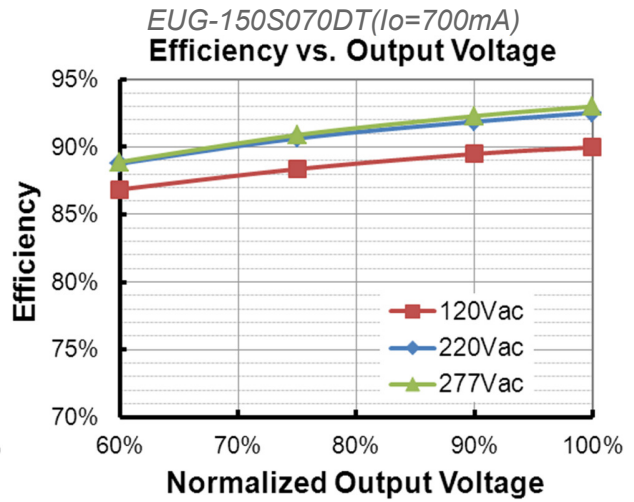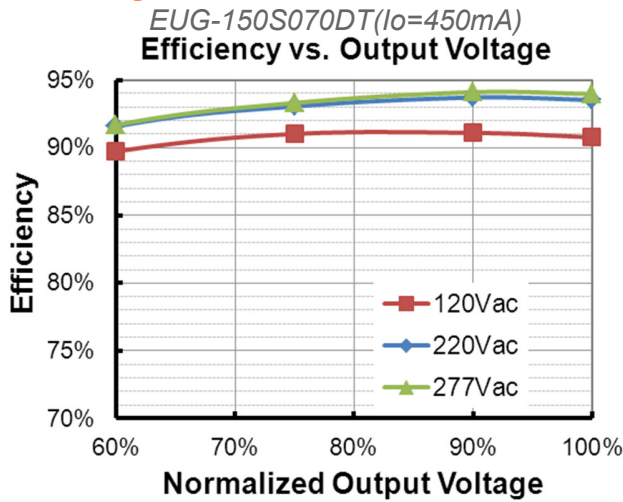


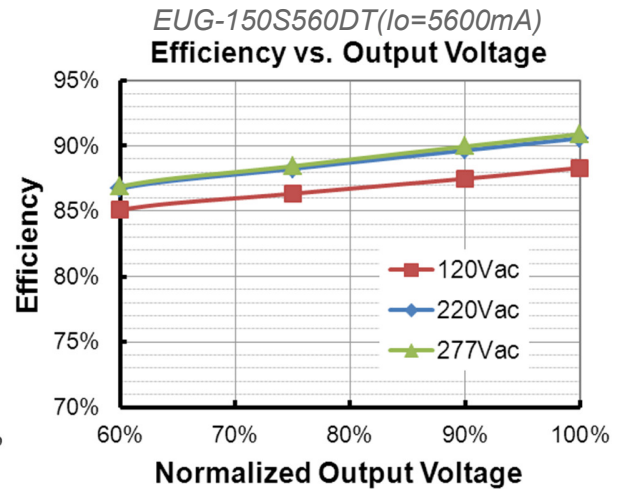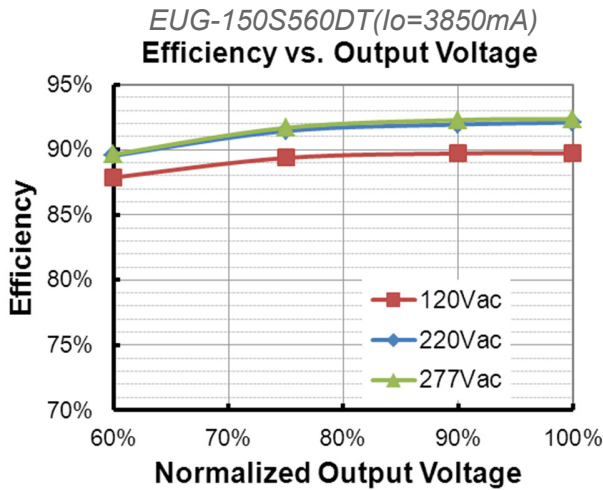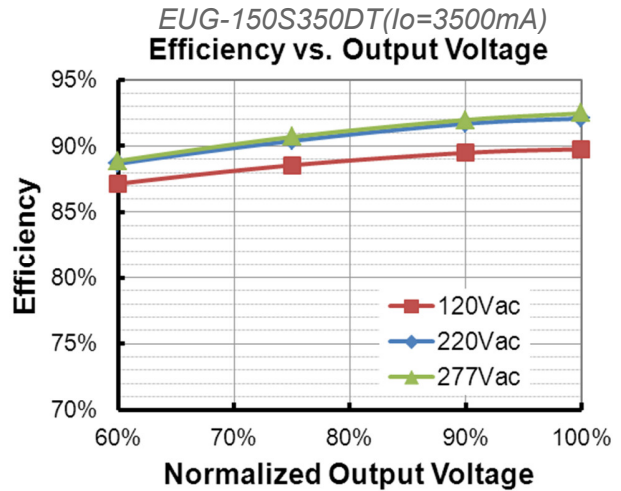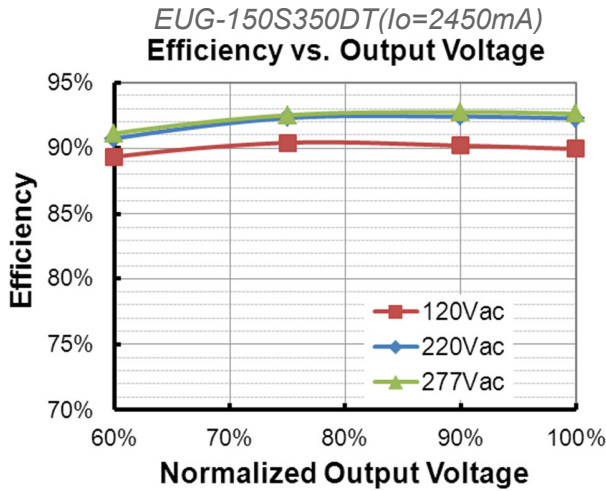

## Power Factor

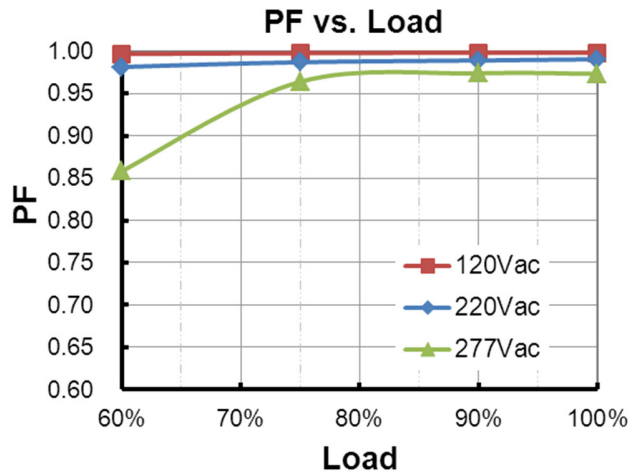

## Total Harmonic Distortion

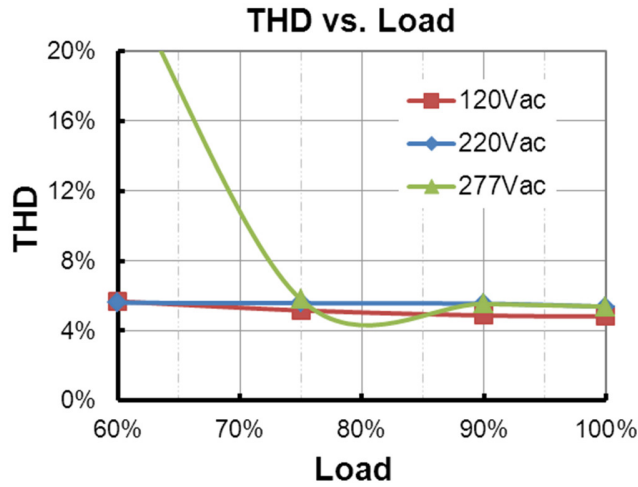


## Protection Functions

Parameter	Notes
Over Temperature Protection	Decreases output current, returning to normal after over temperature is removed.
Short Circuit Protection	Auto Recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.
Over Voltage Protection	Limits output voltage at no load and in case the normal voltage limit fails.



## Dimming

### ● 0-5V Dimming

The recommended implementation of the dimming control is provided below.

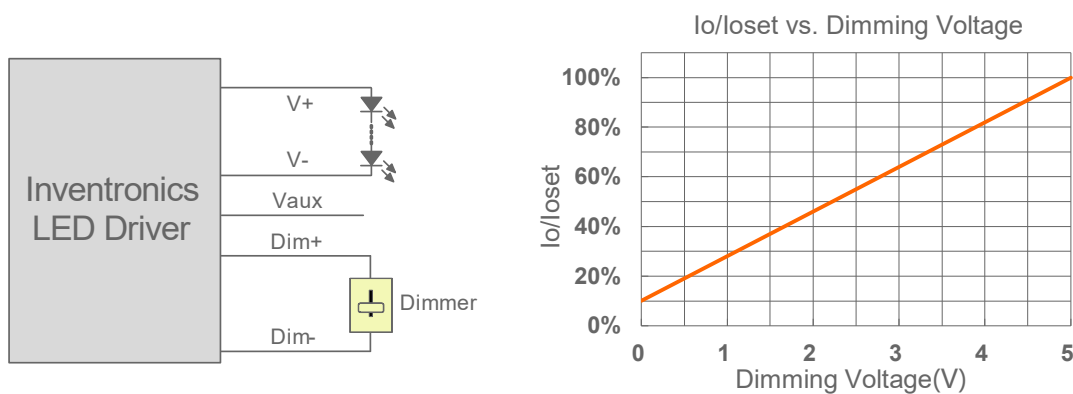

Implementation 1: Positive logic

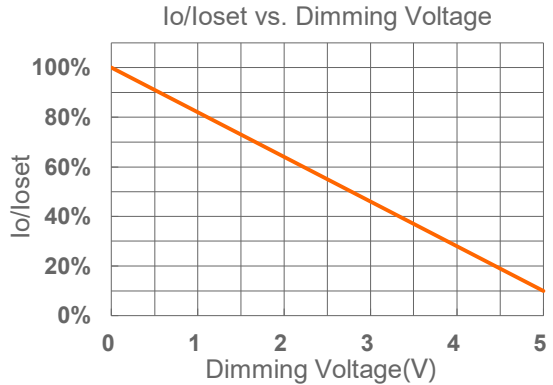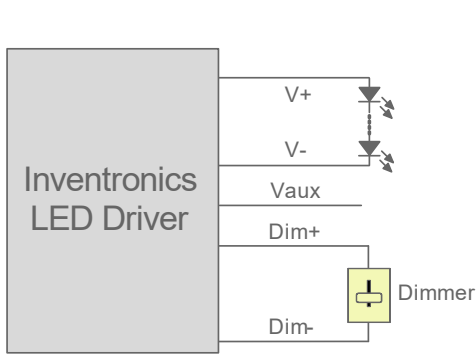



### Implementation 2: Negative logic

**Notes:**



1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. The dimmer can also be replaced by an active 0-5V voltage source signal or passive components like zener.
3. When 0-5V negative logic dimming mode and Dim+ is open, the driver will output maximum current.

### ● 0-10V Dimming

The recommended implementation of the dimming control is provided below.

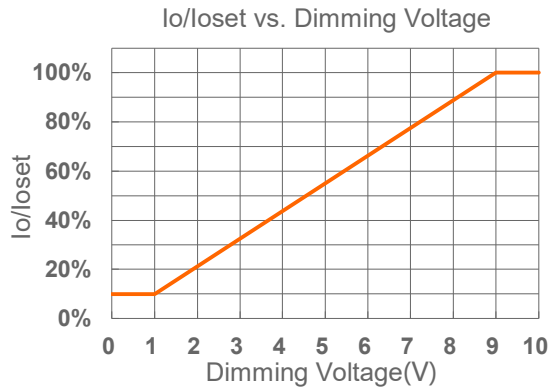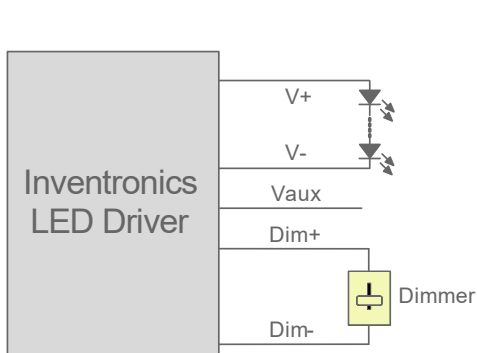

### Implementation 3: Positive logic

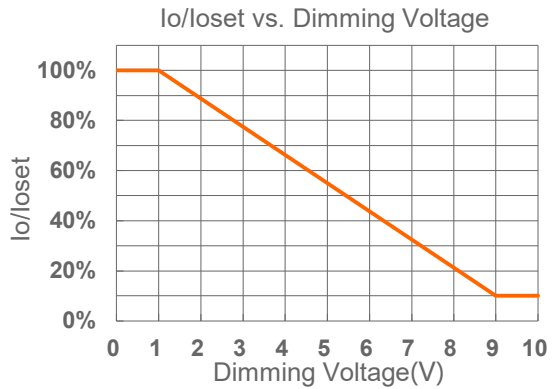
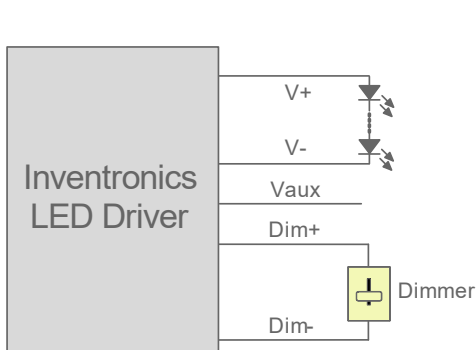


### Implementation 4: Negative logic



**Notes:**

1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. The dimmer can also be replaced by an active 0-10V voltage source signal or passive components like zener.
3. When 0-10V negative logic dimming mode and Dim+ is open, the driver will output minimum current.

● **PWM Dimming**

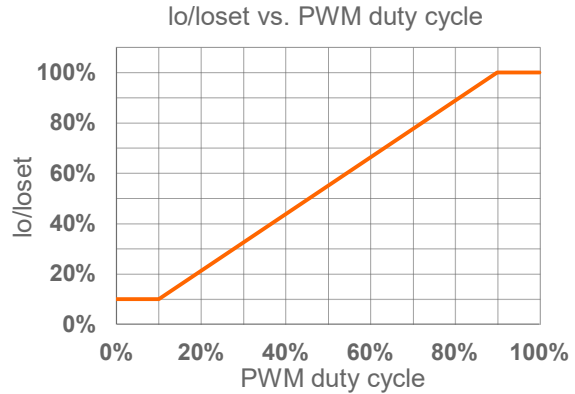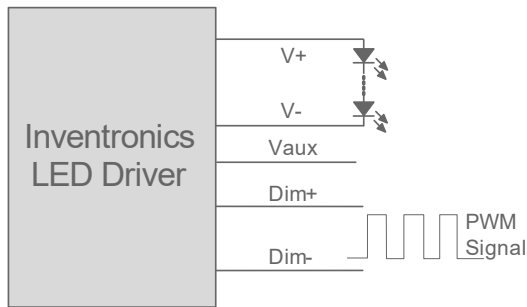

**Implementation 5: Positive logic**

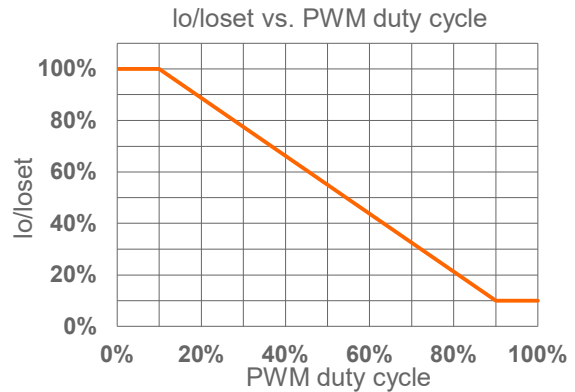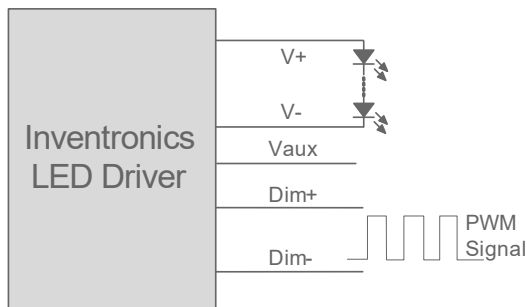


**Implementation 6: Negative logic**

**Notes:**


1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. When PWM negative logic dimming mode and Dim+ is open, the driver will output minimum current.

● Time Dimming

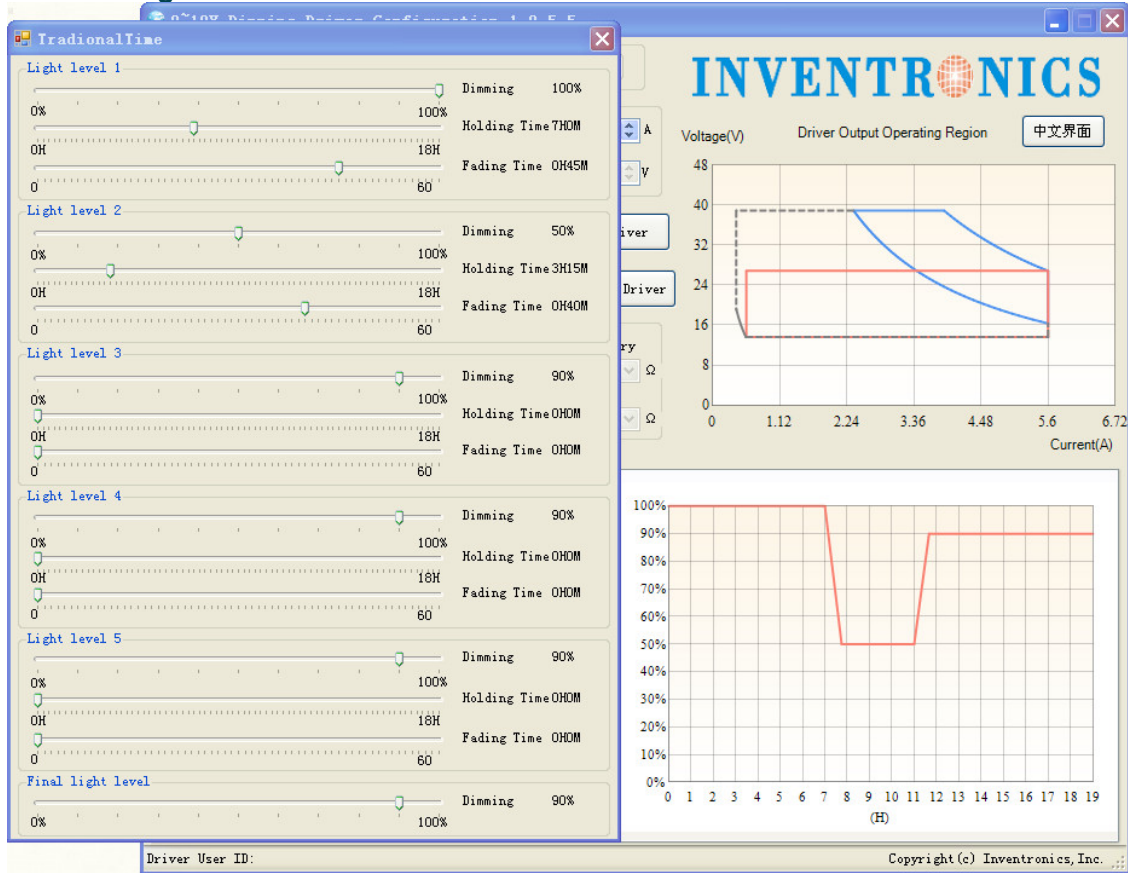

Set the timing curve by pulling the sliders.

**Programming Connection Diagram**

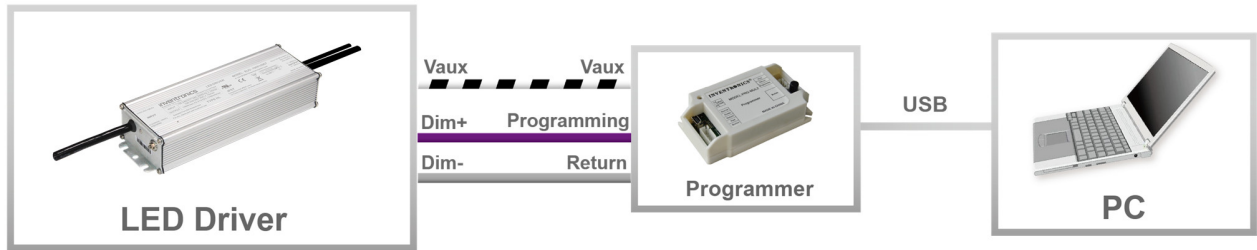


Note: The driver does not need to be powered on during the programming process.


- Please refer to [PRG-MUL2 \(Programmer\)](#) datasheet for details.

## Mechanical Outline

EUG-150S070DT

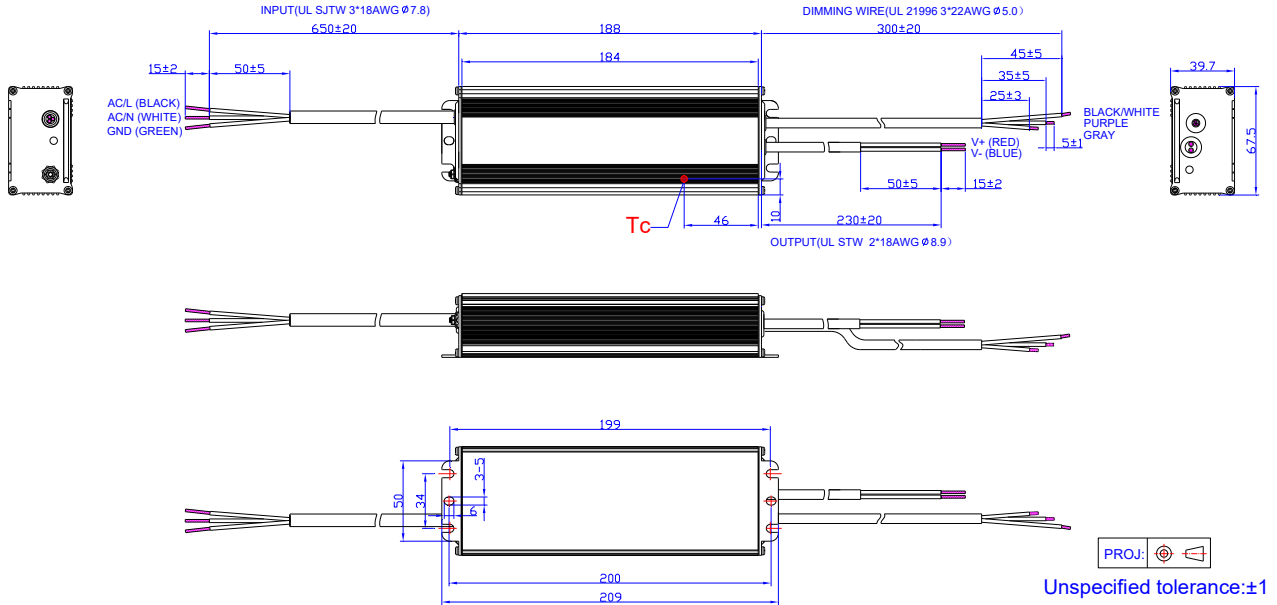

### Others

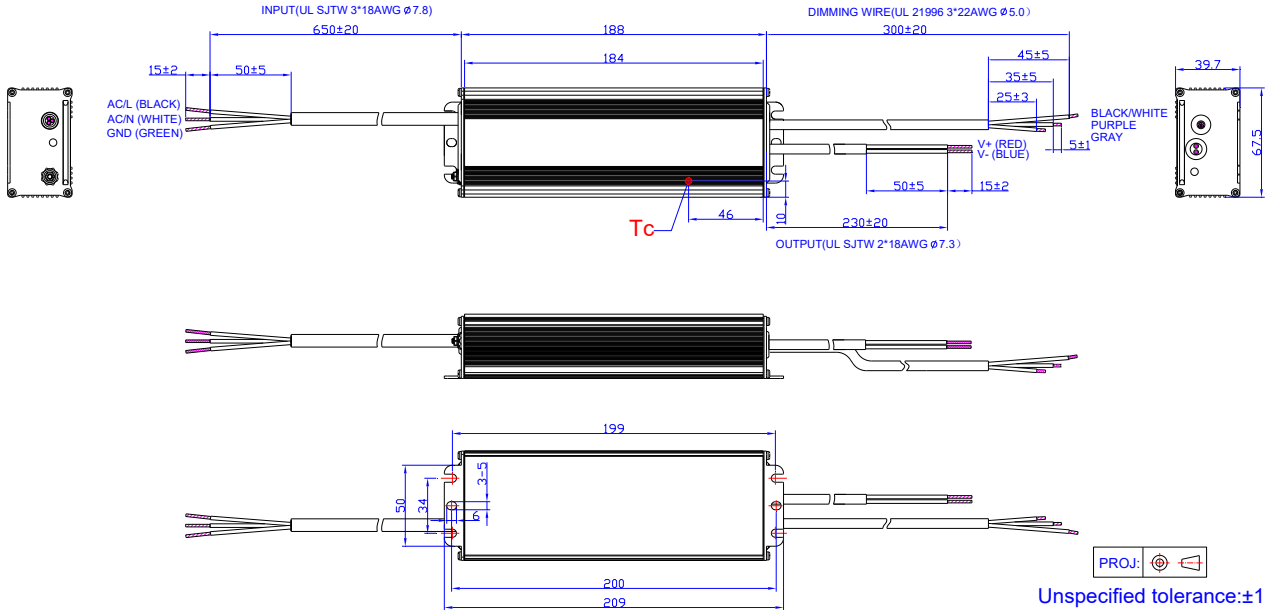

## RoHS Compliance

Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.

## Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2015-08-07	A	Datasheets Release	/	/
2016-01-12	B	KS	/	Added
		EUG-150S070DT	/	Added
		Mechanical Outline	/	Updated
2016-04-07	C	Features	/	Updated
		Input Specifications	Input AC Current	Updated
		General Specifications	Operating Case Temperature for Type TL Tc TL	Added
		General Specifications	With mounting ear	Added
		General Specifications	Net Weight	Added
		Safety &EMC Compliance	/	Updated
		Mechanical Outline	/	Updated
2017-07-04	D	Features	/	Updated
		Models	/	Updated
		Temperature Coefficient of loset	/	Updated
		Dimensions	/	Updated
		Safety &EMC Compliance	/	Updated
		Mechanical Outline	/	Updated
2017-10-26	E	Features	7 Years Warranty	Added
		Input Specifications	PF/THD	Updated
		Operating Case Temperature for Warranty Tc_w	/	Updated
2018-01-31	F	Description	/	Updated
		General Specifications	Lifetime	Updated
		General Specifications	Operating Case Temperature for Warranty Tc_w	Updated
		Lifetime vs. Case Temperature	/	Updated
2026-03-17	G	Format	/	Updated
		Product Photograph	/	Updated
		CB, KCC logo	/	Added
		Models	Note(4)	Updated
		Safety &EMC Compliance	/	Updated
		RoHS Compliance	/	Updated