

Features

- Adjust Color Temperature Continuously
- Adjust Intensity and Color Temperature Separately
- 150W Max Each Channel with Total 150W Load
- 1% Min Each Channel with Total 10% Min Dimming
- Independent Dual Output Channels (Optional)
- Independent Dual Dimming Channels (Optional)
- Dim-to-Off (Optional)
- Channel 1 Power Transfer (Optional)
- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with Programmability
- Isolated 1-5V/1-10V/10V PWM/3-Timer-Modes Dimmable
- Output Lumen Compensation
- Input Surge Protection: DM 6kV, CM 10kV
- All-Around Protection: OVP, SCP, OTP
- IP66/IP67 (DV model)
IP66 and UL Dry/Damp Location (DF model)
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- 5 Years Warranty



Description

The EUW-150DxxxDx series is a 150W, constant-current, programmable IP66/IP67 LED driver that operates from 90-305Vac input with excellent power factor. Created to enhance tunnel, high bay, signage, or horticulture type applications by offering a simplified white color tuning solution. The high efficiency of these drivers and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, output over voltage, short circuit, and over temperature.

Models

Adjustable Output Current Range	Full-Power Current Range (1)	Default Output Current	Input Voltage Range(2)	Output Voltage Range	Max. Output Power	Typical Efficiency (3)	Typical Power Factor		Model Number (5)
							120Vac	220Vac	
10.5-1400mA	1050-1400mA	1050mA	90-305 Vac/ 127-300 Vdc	53-143Vdc	150W	93.0%	0.99	0.96	EUW-150D140Dx
28-3200mA	2800-3200mA	2800mA	90-305 Vac/ 127-300 Vdc	34-54 Vdc	150W	91.5%	0.99	0.96	EUW-150D320Dx ⁽⁴⁾

Notes:(1) Output current range with constant power at 150W



(2) Certified input voltage range: UL, FCC 100-277Vac; otherwise 100-240Vac

(3) Measured at 100% load and 220Vac input (see below "General Specifications" for details)

(4) SELV Output

(5) x = V is CCC and CE model; X = F is UL Recognized model

I-V Operation Area

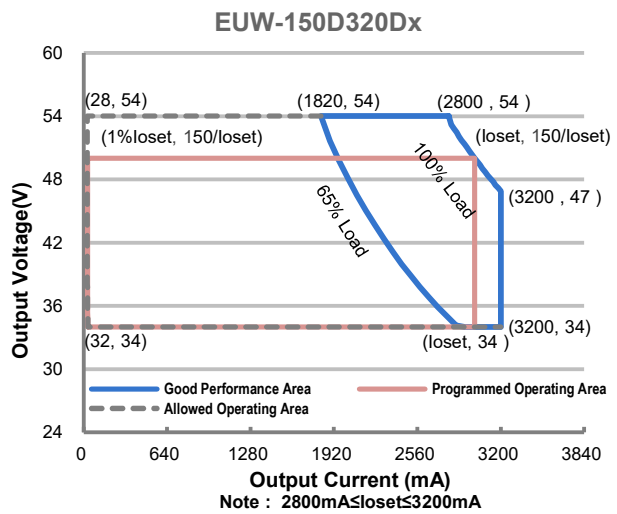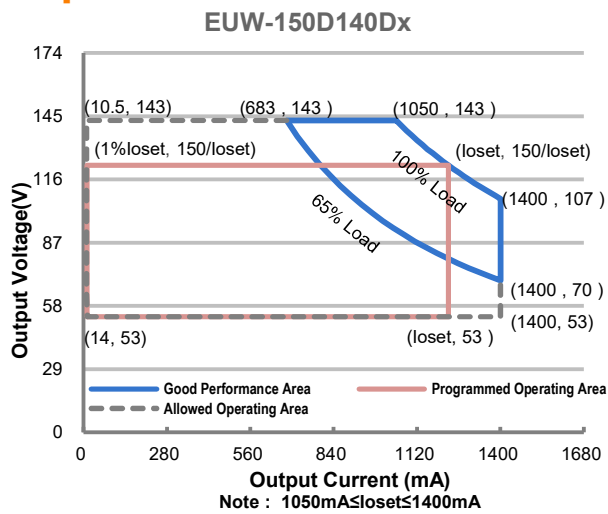

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input AC Voltage	90 Vac	-	305 Vac	
Input DC Voltage	127 Vdc	-	300 Vdc	
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	0.75 MIU	UL 8750; 277Vac/ 60Hz, grounding effectively
	-	-	0.70 mA	IEC 60598-1; 240Vac/ 60Hz, grounding effectively
Input AC Current	-	-	1.55 A	Measured at 100% load and 120 Vac input.
	-	-	0.83 A	Measured at 100% load and 220 Vac input.
Inrush Current(I ² t)	-	-	2.72 A ² s	At 220Vac input, 25°C cold start, duration=432 μs, 10%I _{pk} -10%I _{pk} . See Inrush Current Waveform for the details.
PF	0.9	-	-	At 100-277Vac, 50-60Hz, 65%-100% Load (100-150W)
THD	-	-	20%	
THD	-	-	10%	At 220-240Vac, 50-60Hz, 65%-100% Load (100-150W)

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%loset	-	5%loset	At 100% load condition
Output Current Setting(I _o) Range				
EUW-150D140Dx	10.5 mA	-	1400 mA	
EUW-150D320Dx	28 mA	-	3200 mA	

Output Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Output Current Setting Range with Constant Power EUW-150D140Dx EUW-150D320Dx	1050 mA 2800 mA	- -	1400 mA 3200 mA	
Total Output Current Ripple (pk-pk)	-	5%Iomax	10%Iomax	At 100% load condition. 20 MHz BW
Current Ripple at < 200 Hz (pk-pk)	-	2%Iomax	-	At 100% load condition. Only this component of ripple is associated with visible flicker.
Startup Overshoot Current	-	-	10%Iomax	At 100% load condition
No Load Output Voltage EUW-150D140Dx EUW-150D320Dx	- -	- -	160 V 60 V	
Line Regulation	-	-	±1%	Measured at 100% load
Load Regulation	-	-	±5%	
Turn-on Delay Time	-	-	0.5 s	Measured at 120-277Vac input, 65%-100% Load
Temperature Coefficient of Ioset	-	0.06%/°C	-	Case temperature = 0°C ~Tc max

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 120 Vac input: EUW-150D140Dx Io= 1050 mA Io= 1400 mA EUW-150D320Dx Io= 2800 mA Io= 3200 mA	89.0% 87.5% 87.0% 86.0%	91.0% 89.5% 89.0% 88.0%	- - - -	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Efficiency at 220 Vac input: EUW-150D140Dx Io= 1050 mA Io= 1400 mA EUW-150D320Dx Io= 2800 mA Io= 3200 mA	91.0% 90.0% 89.5% 89.0%	93.0% 92.0% 91.5% 91.0%	- - - -	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Efficiency at 277 Vac input: EUW-150D140Dx Io= 1050 mA Io= 1400 mA EUW-150D320Dx Io= 2800 mA Io= 3200 mA	91.5% 90.5% 90.0% 89.5%	93.5% 92.5% 92.0% 91.5%	- - - -	Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
MTBF	-	332,000 Hours	-	Measured at 220Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK- 217F)
Lifetime	-	106,000 Hours	-	Measured at 220Vac input, 80%Load and 70°C case temperature; See lifetime vs. Tc curve for the details
Lifetime		119,000 Hours		Measured at 220Vac input, 100%Load and 40°C ambient temperature;

General Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Operating Case Temperature for Safety Tc_s	-40°C	-	+90°C	
Operating Case Temperature for Warranty Tc_w	-40°C	-	+80°C	Case temperature for 5 years warranty Humidity: 10%RH to 95%RH
Storage Temperature	-40°C	-	+85°C	Humidity: 5%RH to 95%RH
Dimensions Inches (L × W × H) Millimeters (L × W × H)	7.09 × 2.52 × 1.44 180 × 64 × 36.5			With mounting ear 7.76 × 2.52 × 1.44 197 × 64 × 36.5
Net Weight	-	830 g	-	

Dimming Specifications

Parameter		Min.	Typ.	Max.	Notes
Absolute Maximum Voltage on the Vdim (+) Pin		-20 V	-	20 V	
Source Current on Vdim (+)Pin		117 uA	130 uA	143 uA	Vdim(+) = 0 V,
Dimming Output Range	EUW-150D140Dx EUW-150D320Dx	1%loset	-	loset	1050 mA ≤ loset ≤ 1400 mA 2800 mA ≤ loset ≤ 3200 mA
	EUW-150D140Dx EUW-150D320Dx	10.5 mA 28 mA	-	loset loset	10.5 mA ≤ loset < 1050 mA 28 mA ≤ loset < 2800 mA
Recommended Dimming Range for 1-5V		0.25 V	-	4.75 V	Dimming mode set to 1-5V in Inventronics Programing Software.
CCT Range for 0-5V		0	-	5	
CCT:I1 off Voltage		4.35	4.5	4.65	
CCT:I1 on Voltage		4.15	4.3	4.45	
CCT:I2 off Voltage		0.35	0.5	0.65	
CCT:I2 on Voltage		0.55	0.7	0.85	
Dim+: Skip to 100% Iomax Voltage		11.0	11.1	11.2	Dimming mode set to 1-10V negative logic in Inventronics Programing Software.
Dim+: Skip to 10% Iomax Voltage		10.8	10.9	11.0	
Recommended Dimming Range for 1-10V		1 V	-	9 V	Default 1-10V dimming mode with positive logic.
CCT Range for 0-10V		0	-	9V	
CCT:I1 off Voltage		8.35	8.5	8.65	
CCT:I1 on Voltage		8.15	8.3	8.45	
CCT:I2 off Voltage		0.35	0.5	0.65	
CCT:I2 on Voltage		0.55	0.7	0.85	
PWM_in High Level		-	-	10V	
PWM_in Low Level		-	0V	-	
PWM_in Frequency Range		200 Hz	-	2 KHz	
PWM_in Duty Cycle		0%	-	100%	

Dimming Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
CCT:I1 off Voltage	83%	85%	87%	
CCT:I1 on Voltage	81%	83%	85%	
CCT:I2 off Voltage	3%	5%	7%	
CCT:I2 on Voltage	5%	7%	9%	


Notes: (1) I1 current flows between V+ and V1-;
(2) I2 current flows between V+ and V2-;

Safety & EMC Compliance


Safety Category	Standard
UL/CUL	UL 8750,CAN/CSA-C22.2 No. 250.13
CCC	GB/T 19510.1, GB/T 19510.213
CE	EN 61347-1, EN 61347-2-13
EMI Standards	Notes
EN IEC 55015/GB/T 17743 ⁽¹⁾	Conducted emission Test & Radiated emission Test
EN IEC 61000-3-2/GB 17625.1	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
FCC Part 15 ⁽¹⁾	ANSI C63.4 Class B
	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: [1] this device may not cause harmful interference, and [2] this device must accept any interference received, including interference that may cause undesired Operation.
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: Differential Mode 6 kV, Common Mode 10 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN IEC 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

Note: (1) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.


Derating

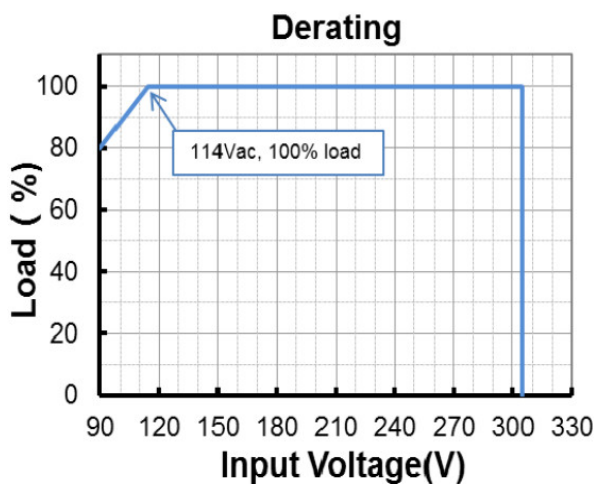

Lifetime vs. Case Temperature

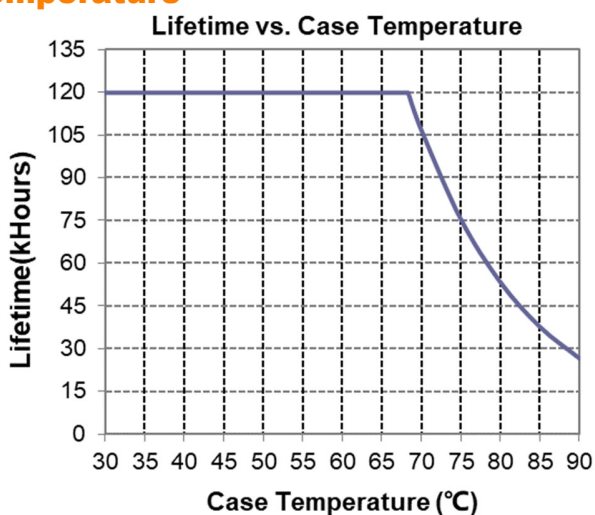


Inrush Current Waveform

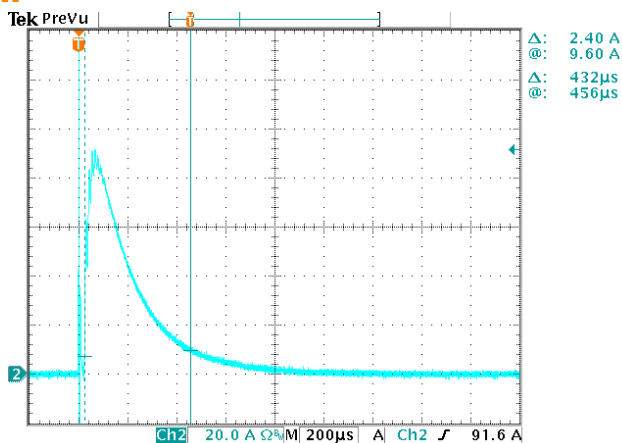

Efficiency vs. Load


EUW-150D140Dx($I_o=1050mA$)

Efficiency vs. Output Voltage

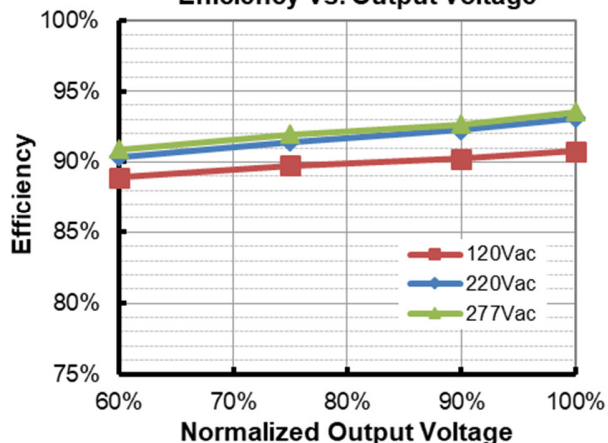


EUW-150D140Dx($I_o=1400mA$)

Efficiency vs. Output Voltage

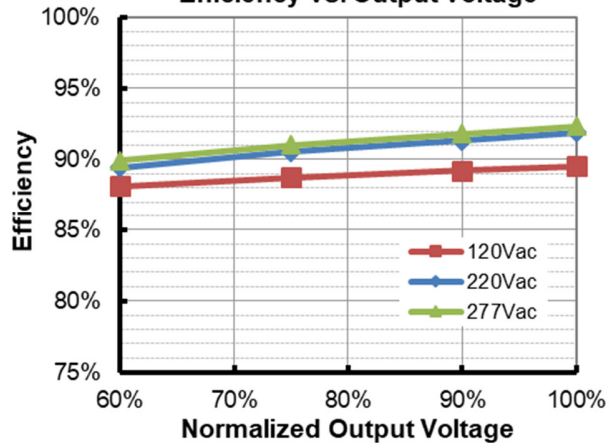


EUW-150D320Dx($I_o=2800mA$)

Efficiency vs. Output Voltage

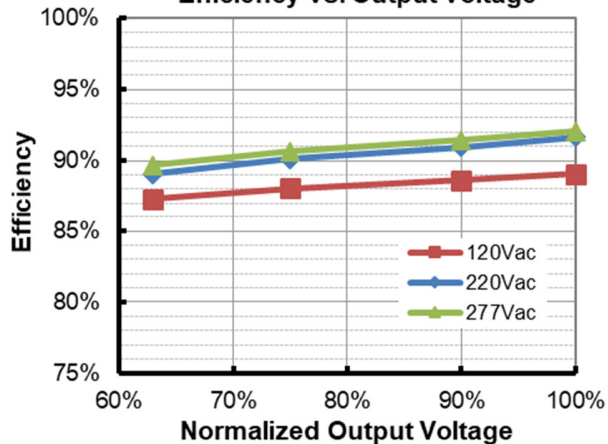


EUW-150D320Dx($I_o=3200mA$)


Efficiency vs. Output Voltage

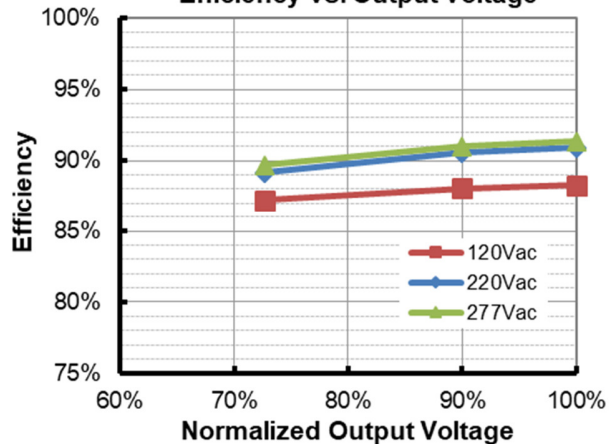

Power Factor

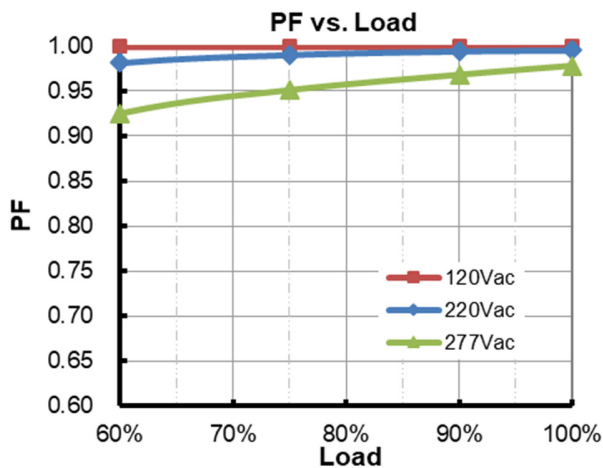

Total Harmonic Distortion

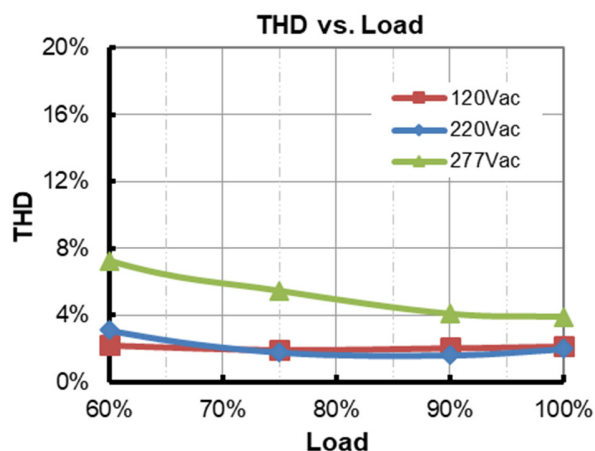



Protection Functions

Parameter	Notes
Over Temperature Protection	Decreases output current, returning to normal after over temperature is removed.
Short Circuit Protection	Auto Recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.
Over Voltage Protection	Limits output voltage at no load and in case the normal voltage limit fails.




Dimming

1-5V Dimming

The recommended implementation of the dimming control is provided below which shows **total** output current in dimming voltage related diagram and I1(black), I2(blue) distribution in CCT voltage related diagram based on full power.

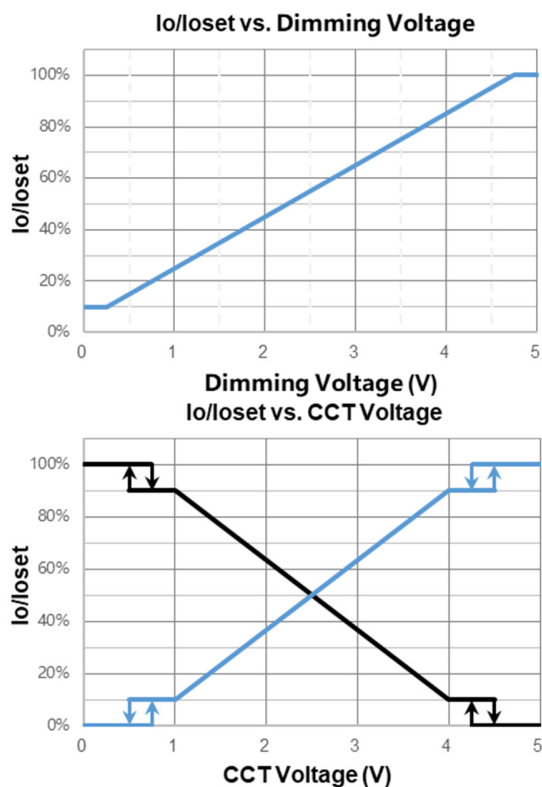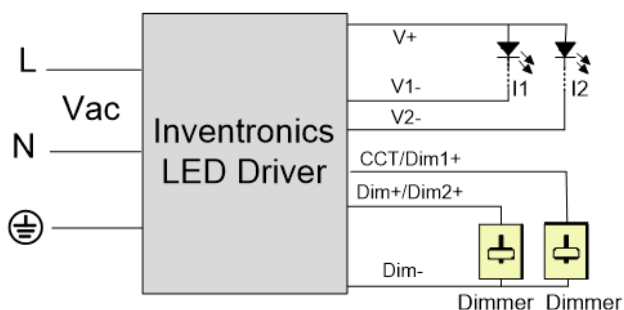

Implementation 1: Positive logic

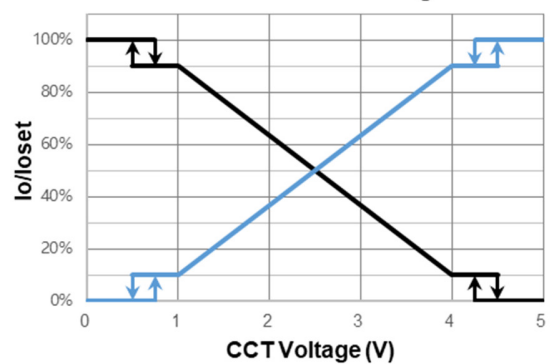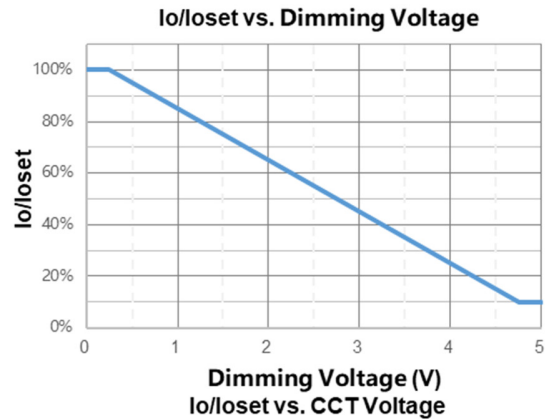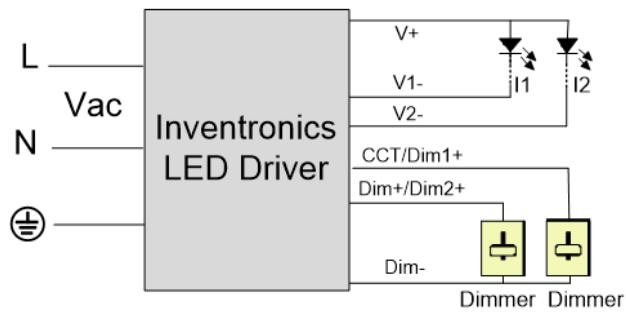




Implementation 2: Negative logic

Notes:



1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. The dimmer can also be replaced by an active 1-5V voltage source signal.
3. When 1-5V negative logic dimming mode and Dim+ is open, the driver will output maximum current.

● 1-10V Dimming

The recommended implementation of the dimming control is provided below which shows **total** output current in dimming voltage related diagram and I1(black), I2(blue) distribution in CCT voltage related diagram based on full power.

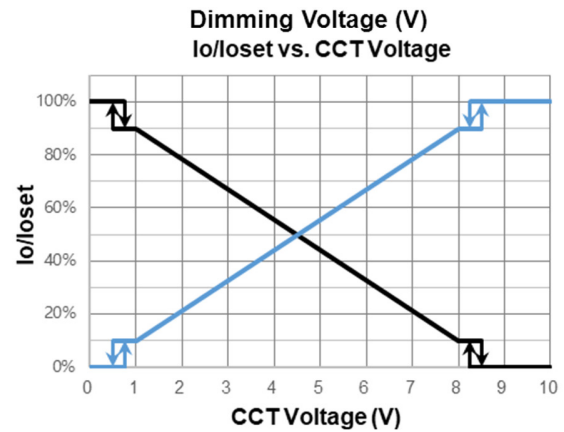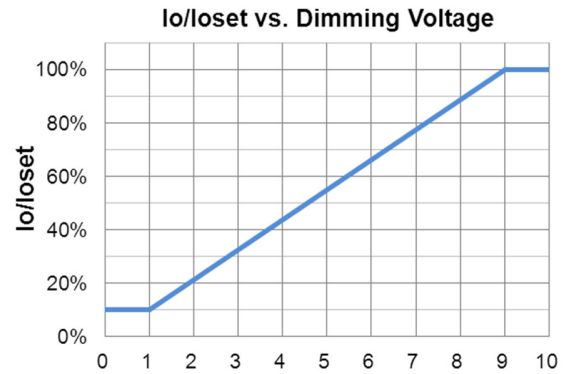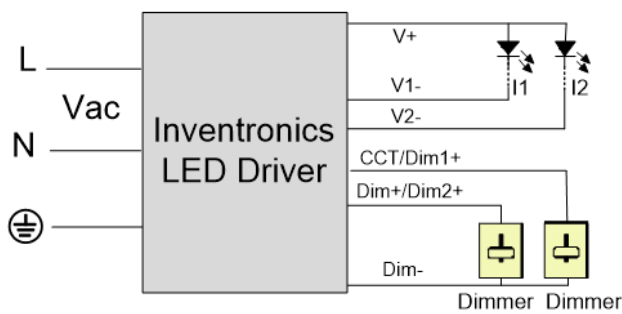

Implementation 3: Positive logic

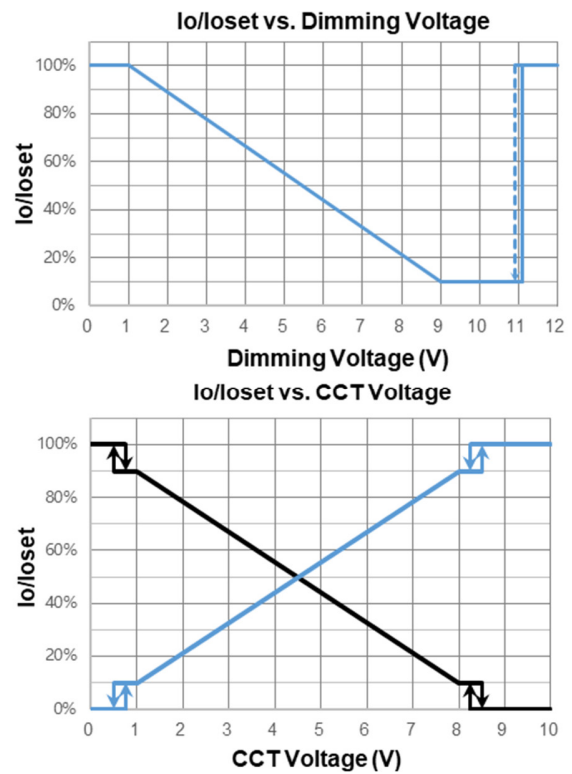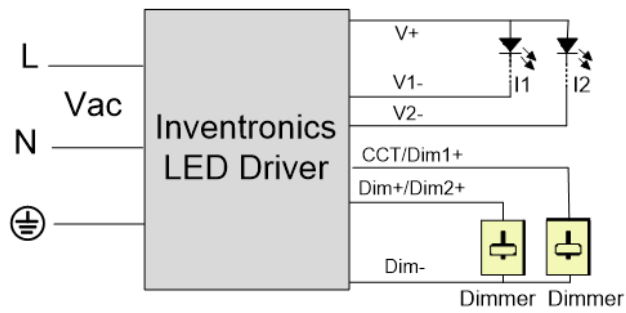




Implementation 4: Negative logic

Notes:



1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. The dimmer can also be replaced by an active 1-10V voltage source signal.
3. When 1-10V negative logic dimming mode and Dim+ is open, the driver will output maximum current.

● 10V PWM Dimming

The recommended implementation of the dimming control is provided below which shows **total** output current in PWM duty cycle related diagram and I1(black), I2(blue) distribution in CCT voltage related diagram based on full power.

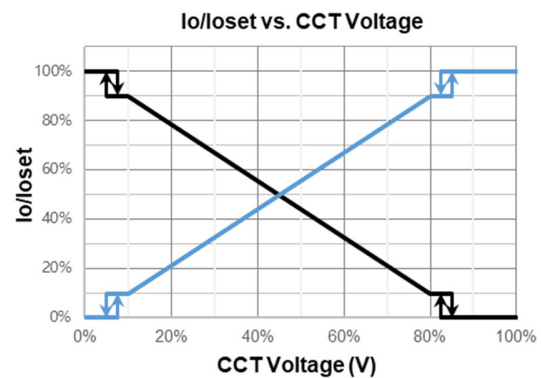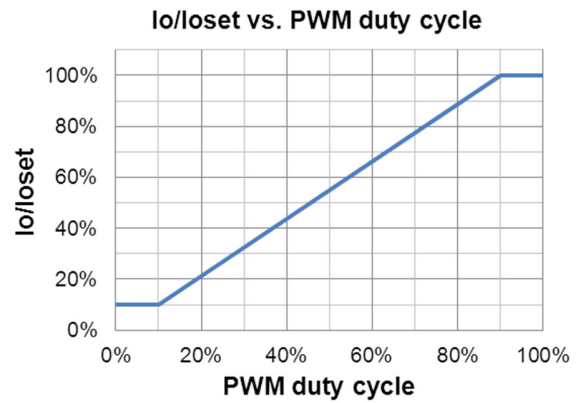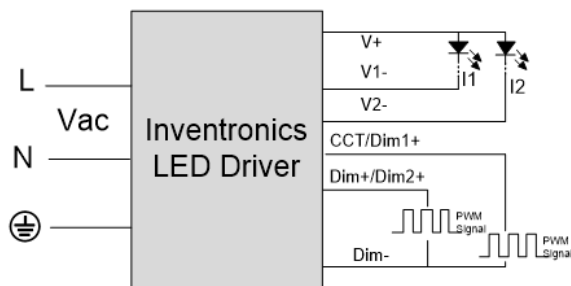

Implementation 5: Positive logic

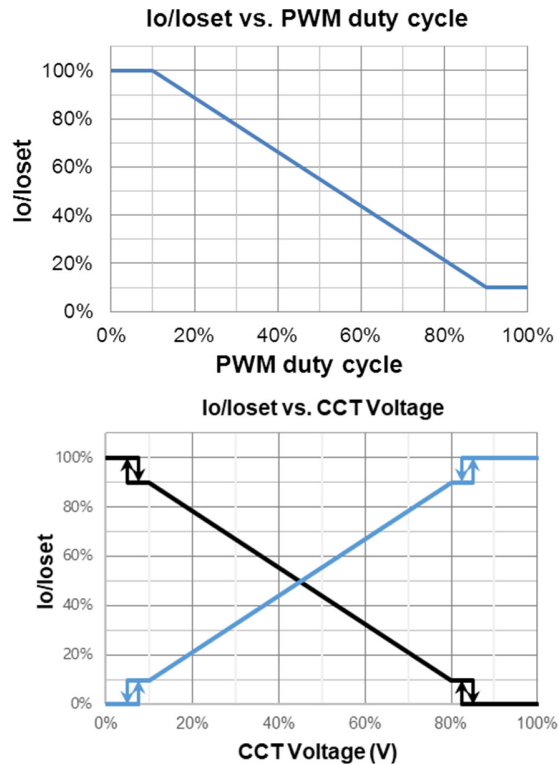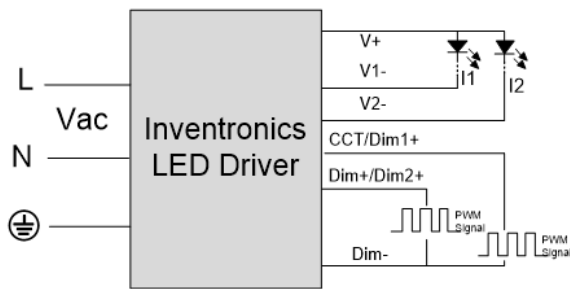

Implementation 6: Negative logic

Notes:

1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. When 10V PWM negative logic dimming mode and Dim+ is open, the driver will output maximum current.

● Dim/CCT Time Dimming

Time dimming control includes 3 kinds of modes, they are Self Adapting-Midnight, Self Adapting-Percentage and Traditional Timer.

- **Self Adapting-Midnight:** Automatically adjusts the dimming curve based on the on-time of past two days (if difference <15 minutes), assuming that the center point of the dimming curve is midnight local time.
- **Self Adapting-Percentage:** Automatically adjusts the on-time of each step by a constant percentage = (actual on-time for the past 2 days if difference <15 min) / (programmed on-time from the dimming curve).
- **Traditional Timer:** Follows the programmed timing curve after power on with no changes.

● Output Lumen Compensation

Output Lumen Compensation (OLC) may be used to maintain constant light output over the life of the LEDs by driving them at a reduced current when new, then gradually increasing the drive current over time to counteract LED lumen degradation.

Independent Mode Dimming (Optional)


Independent mode can adjust two channels completely independent by 0-10V or 10V PWM signal.

● Dimming Specifications

Parameter	Min.	Typ.	Max.	Notes
Absolute Maximum Voltage on the Vdim (+) Pin	-20 V	-	20 V	
Recommended Dimming Range for 0-10V	0 V	-	10 V	
Dim off Voltage	0.35 V	0.5 V	0.65V	Independent mode 0-10V dimming
Dim on Voltage	0.55 V	0.7 V	0.85V	
PWM_in High Level	-	10V	-	Independent mode 10V PWM dimming
PWM_in Low Level		0V		
PWM_in Frequency Range	200 Hz	-	3 KHz	
PWM_in Duty Cycle	1%	-	99%	
PWM Dimming off (Positive Logic)	3%	5%	8%	
PWM Dimming on (Positive Logic)	5%	7%	10%	
Hysteresis	-	2%	-	

● 0-10V Dimming

The recommended implementation of the dimming control is provided below.


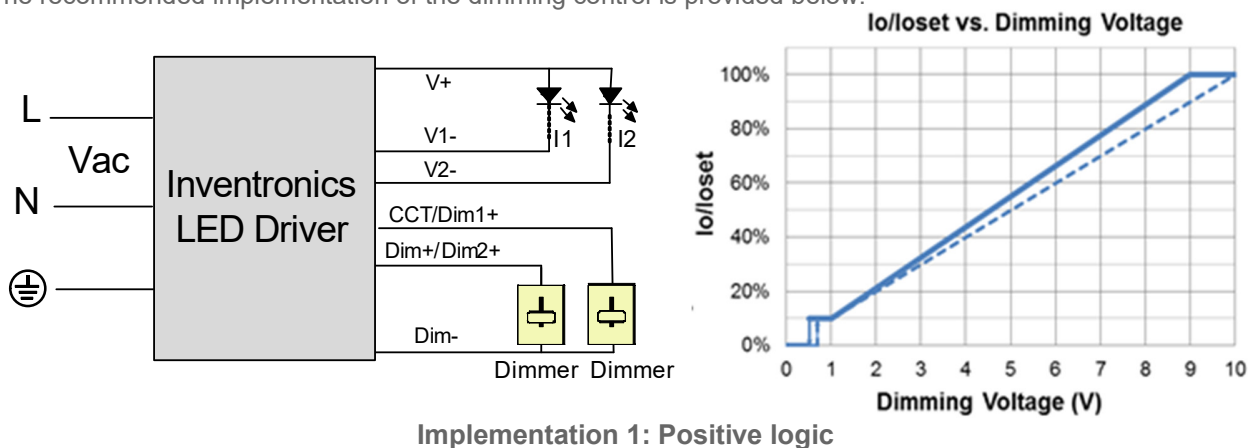


Notes:

1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. The dimmer can also be replaced by an active 0-10V voltage source signal.

● 10V PWM Dimming

The recommended implementation of the dimming control is provided below.

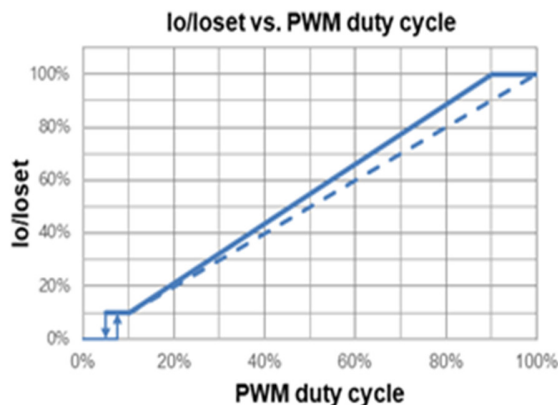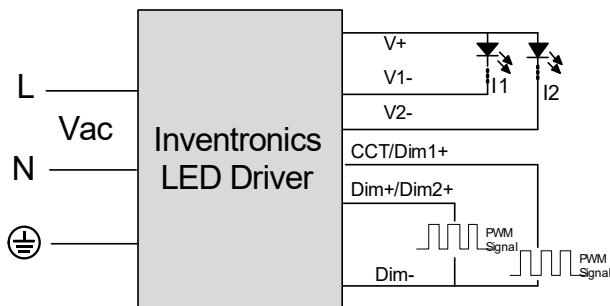

Implementation 2: Positive logic

Notes: Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.

● Power transfer

This function is optional, when channel 1 is dim-to-off, part or all of its power can be transferred to channel 2 by setting Inventronics Programming software.

For example

Select "Independent Mode", then select "Modify Ch2 power_max" if power transfer function is needed. If input 80% in the field, the I_{ch2} value will be added by 80%* I_{ch1} current when Ch1 is dimmed to off.

Please ensure the total power cannot exceed 150W.

☒ **Modify Dual Mode**

☐ Dependent Mode
 ☒ Independent Mode

☒ **Modify Ch2 power_max**

When Ch1 is off, 80% power of Ch1 transfers to Ch2.

% (0%~100%)


● Output Lumen Compensation

Output Lumen Compensation (OLC) may be used to maintain constant light output over the life of the LEDs by driving them at a reduced current when new, then gradually increasing the drive current over time to counteract LED lumen degradation.

● Maximum Dimming Level with 9V or 10V Selectable

The maximum dimming level can be set as corresponding dimming voltage is 9V or 10V by Inventronics Multi Programmer, 9V is default.

Programming Connection Diagram

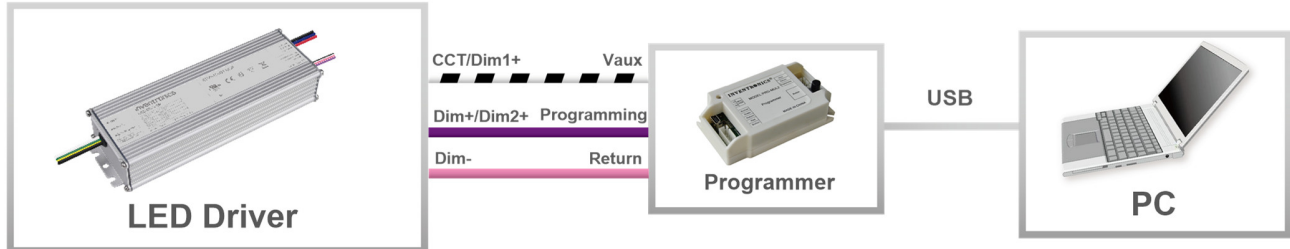


Note: The driver does not need to be powered on during the programming process.


- Please refer to [PRG-MUL2](#) (Programmer) datasheet for details.

Mechanical Outline

EUW-150DxxxDV

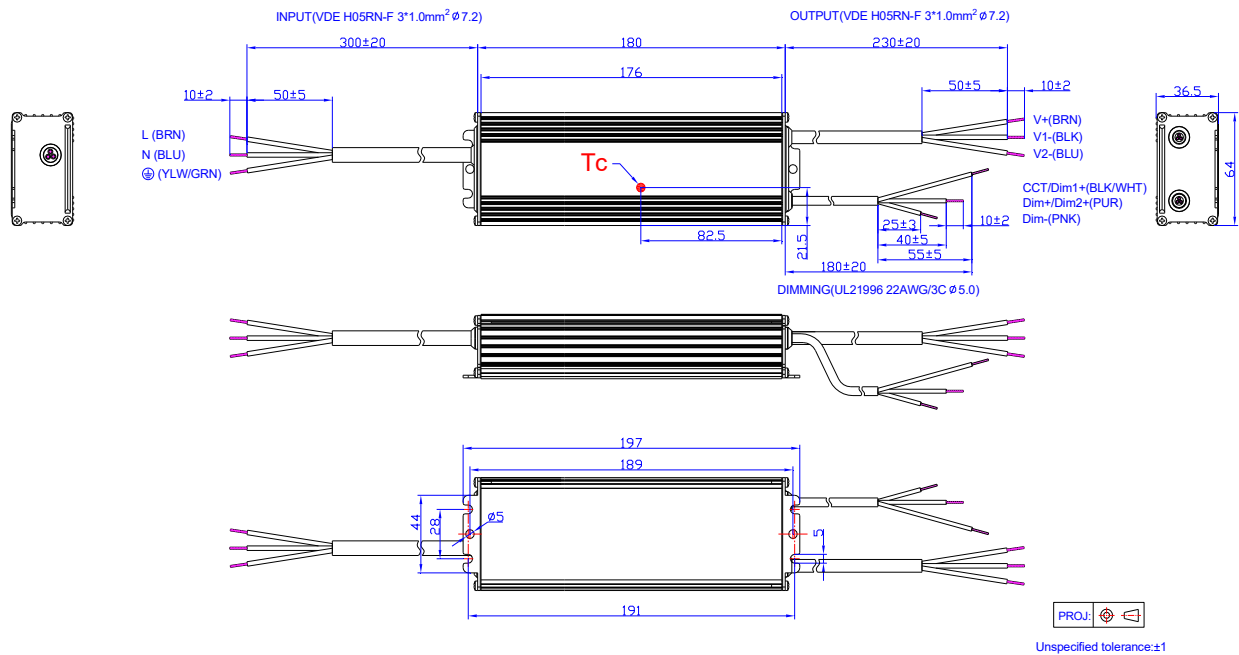

EUW-150DxxxDF

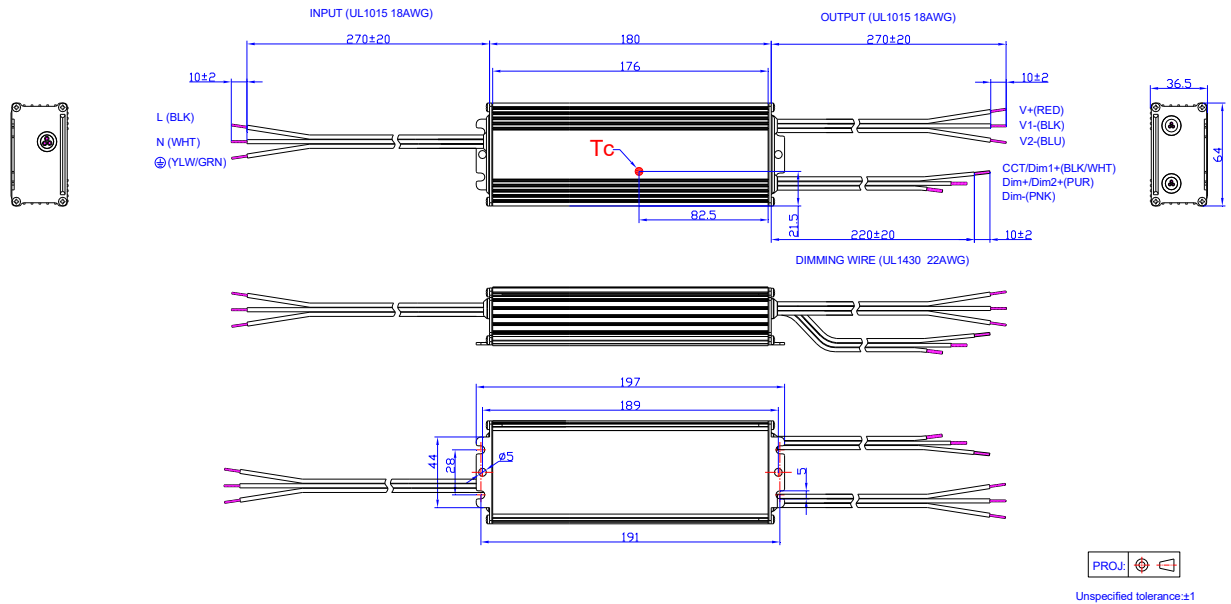

RoHS Compliance

Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2022-09-22	A	Datasheet Release	/	/
2022-10-10	B	EUW-150D320Dx	/	Added
2023-07-20	C	Product Photograph	/	Updated
		Safety & EMC Compliance	/	Updated
		Programming Connection Diagram	/	Updated
		Mechanical Outline	/	Updated
2026-06-18	D	Format	/	Updated
		Product Photograph	/	Updated
		Safety & EMC Compliance	/	Updated