

## Features

- Ultra High Efficiency (Up to 90%)
- High Power Factor (0.99 Typical)
- Constant Voltage Output
- Input Surge Protection: DM 4kV, CM 6kV
- All-Round Protection: OVP, OCP, SCP, OTP
- IP67
- SELV Output
- 5 Years Warranty



## Description

The EUV-096SxxxSV series is a 96W, constant-voltage LED driver that operates from 90-305 Vac input with excellent power factor. It is created for many lighting applications including architectural, decorative and signage, etc. The high efficiency of the driver and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, over current, output over voltage, short circuit, and over temperature.

## Models

Output Voltage	Input Voltage Range	Output Current Range	Max. Output Power	Typical Efficiency (1)	Typical Power Factor		Model Number (2)(3)(4)(5)
					120Vac	220Vac	
24 Vdc	90 ~ 305 Vac	0~4.00 A	96 W	88.0%	0.99	0.96	EUV-096S024SV
36 Vdc	90 ~ 305 Vac	0~2.66 A	96 W	88.0%	0.99	0.96	EUV-096S036SV
48 Vdc	90 ~ 305 Vac	0~2.00 A	96 W	88.0%	0.99	0.96	EUV-096S048SV
54 Vdc	90 ~ 305 Vac	0~1.77 A	96 W	90.0%	0.99	0.96	EUV-096S054SV

- Note:** (1) Measured at 25°C, 100% load and 220 Vac input.  
 (2) All the models are certificated to CCC, except EUV-096S054SV.  
 (3) All the models are certificated to BIS, except EUV-096S036SV and EUV-096S054SV.  
 (4) SELV output  
 (5) For BIS models add suffix -3000.

## Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input AC Voltage	90 Vac	-	305 Vac	
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	1 mA	At 277Vac 60Hz input
Input AC Current	-	-	1.2 A	Measured at 100% load and 100 Vac input.
	-	-	0.6 A	Measured at 100% load and 220 Vac input.

## Input Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Inrush Current	-	-	69 A	At 220Vac input, 25°C Cold start, Duration= 2 mS, 10%Ipk-10%Ipk
Inrush Current(I <sup>2</sup> t)	-	-	2.8 A <sup>2</sup> s	
PF	0.90	-	-	At 100-277Vac, 50-60Hz, 75%-100%load. (72-96W)
THD	-	-	20%	

## Output Specifications

Parameter	Min.	Typ.	Max.	Notes	
Output Voltage Tolerance	-5%	-	5%		
Ripple and Noise (pk-pk)	-	-	3% V <sub>O</sub>	Measured by 20 MHz bandwidth oscilloscope and the output paralleled a 0.1 uF ceramic capacitor and a 10 uF electrolytic capacitor.	
Line Regulation	-	-	±1%		
Load Regulation	-	-	±2%		
Turn-on Delay Time	-	1.0 s	2.0 s	Measured at 120Vac input, 75%-100%load	
	-	1.0 s	2.0 s	Measured at 220Vac input, 75%-100%load	
Output Overshoot / Undershoot	-	-	10%	When power on or off.	
Load Dynamic Response	Output Deviation	-	-	5% V <sub>O</sub>	R/S: 1 A/uS Load: 25% ~ 75% 100%load
	Settling Time	-	-	10 mS	
Temperature coefficient	-	0.03%/°C	-	Case temperature = 0°C ~T <sub>c</sub> max	

## Protection Functions

Parameter	Min.	Typ.	Max.	Notes
Over Voltage Protection				
V <sub>O</sub> = 24 V	-	30 V	35 V	
V <sub>O</sub> = 36 V	-	45 V	50 V	
V <sub>O</sub> = 48 V	-	55 V	60 V	
V <sub>O</sub> = 54 V	-	65 V	75 V	
Over Current Protection	100% I <sub>O</sub>		110% I <sub>O</sub>	Hiccup mode. The power supply shall be self-recovery when the fault condition is removed.
Over Temperature Protection-T <sub>c</sub>	-	110 °C	-	Maximum temperature of the case. The power supply shall be self-recovery when the fault condition is removed.
Short Circuit Protection	No damage shall occur when any output operating in a short circuit condition. The power supply shall be self-recovery when the fault condition is removed.			

## General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency @120 Vac input: V <sub>o</sub> = 24 V V <sub>o</sub> = 36 V V <sub>o</sub> = 48 V V <sub>o</sub> = 54 V	84.5% 84.0% 84.0% 85.0%	86.5% 86.0% 86.0% 87.0%	- - - -	Measured at 100% load, 120 Vac input, 25°C ambient temperature, after the unit is thermally stabilized. It will be about 2.5% lower, if measured immediately after startup.
Efficiency @220 Vac input: V <sub>o</sub> = 24 V V <sub>o</sub> = 36 V V <sub>o</sub> = 48 V V <sub>o</sub> = 54 V	86.0% 86.0% 86.0% 88.0%	88.0% 88.0% 88.0% 90.0%	- - - -	Measured at 100% load, 220 Vac input, 25°C ambient temperature, after the unit is thermally stabilized. It will be about 2.5% lower, if measured immediately after startup.
MTBF	-	202,000 Hours	-	Measured at 120Vac input,80% Load and 25°C ambient temperature (MIL-HDBK-217F)
Lifetime	-	56,600 Hours	-	Measured at 120Vac input, 80%load; Case temperature=60°C @ Tc point. See the lifetime vs. Tc curve for the details
Operating Case Temperature for Safety Tc <sub>s</sub>	-40°C	-	+89 °C	
Operating Case Temperature for Warranty Tc <sub>w</sub>	-40°C	-	+70 °C	Case temperature for 5 years warranty Humidity: 10% RH to 95% RH
Storage Temperature	-40°C	-	+85 °C	Humidity: 5% RH to 95% RH
Dimensions Inches (L × W × H) Millimeters (L × W × H)	6.85 × 2.66 × 1.44 174 × 67.5 × 36.5			With mounting ear 7.91 × 2.66 × 1.44 201 × 67.5 × 36.5
Net Weight	-	925 g	-	

## Safety & EMC Compliance


Safety Category	Standard
CE	EN 61347-1, EN 61347-2-13
CCC	GB/T 19510.1, GB/T 19510.213
KS	KS C 7655
BIS	IS 15885(Part2/Sec13)
EMI Standards	Notes
EN IEC 55015/GB/T 17743 <sup>(1)</sup>	Conducted emission Test &Radiated emission Test
EN IEC 61000-3-2/GB 17625.1	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 15 kV air discharge, 8 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT

## Safety & EMC Compliance (Continued)


EMS Standards	Notes
EN 61000-4-5	Surge Immunity Test: AC Power Line: Differential Mode 4 kV, Common Mode 6 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

**Note:** (1) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.

## Lifetime vs. Case Temperature Curve

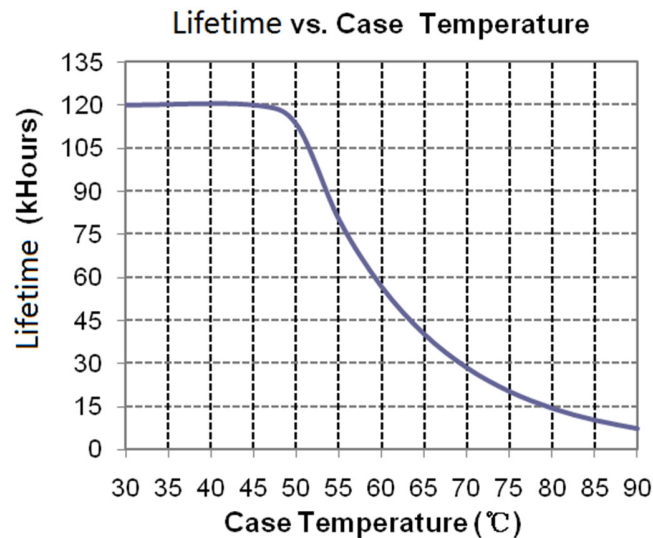

## Mechanical Outline

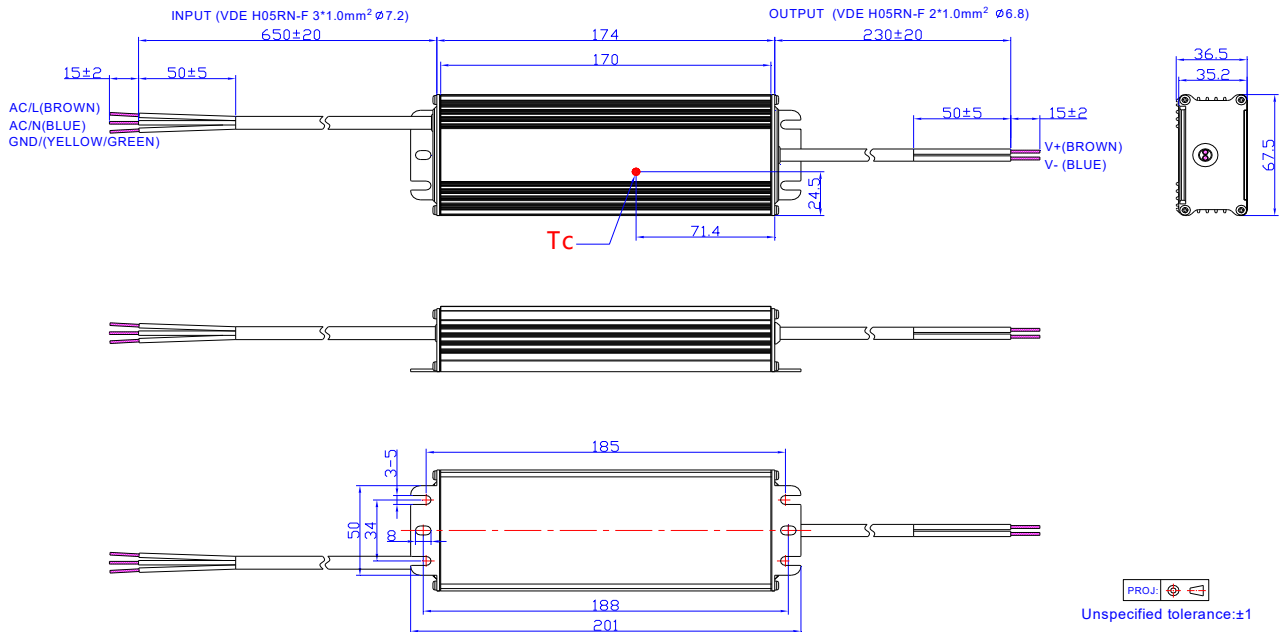

## RoHS Compliance

Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.

## Revision History

Change Date	Rev.	Description of Change				
		Item	From		To	
2010-12-21	A	Change PF at 220Vac	0.95		0.96	
		Change the notes for models	/		/	
		Change Ripple and Noise (pk-pk)	2% Vo		3% Vo	
		Delete Derating Curve	/		/	
		Add Max. Case Temperature	/		tc: 89 °C	
		Update safety standards	/		/	
		Add FCC Part15 Class B	/		FCC Part 15 Class B, ANSI C63.4: 2009.	
		Update mechanical Outline	/		/	
2011-07-08	B	Models-TE	88%,89%,89%,90%		87%,88%,88%,90%	
		Input Specifications-Input AC Current	1.2A		1.3A	
		Inrush Current	50A		69A	
		Output Specifications-Turn-on Delay Time	0.8S	1S	1S	3S
			0.8S	1S	0.8S	2S
		Protection Functions	/			
		General Specifications-Typ.	86%			86%
			87%			87%
			87%			87%
			88%			88%
			88%			87%
89%			88&			
89%			88%			
90%			90%			
General Specifications-Notes	1%		2-3%			
2012-01-18	C	Input AC Current	1.3 A		1.2 A	
2012-05-17	D	All Models-Min Efficiency	/		1% Lower	
2012-06-08	E	Derating Curve	/		Updated	
		Life time vs. Tc Curve	/		Added	

## Revision History (Continued)

Change Date	Rev.	Description of Change				
		Item	From		To	
2012-7-17	F	Max Case Temperature	/		Updated	
		EN61000-4-5	line to line 2 kV, line to earth 4 kV	line to line 4 kV, line to earth 6 kV		
2012-8-6	G	SELV Output	/		Added	
		Duration of Inrush Current	140 $\mu$ s		2 mS	
		Operating Temperature/Derating Curve	/		Updated	
2012-10-16	H	MTBF & Life time Typical	/		Added	
		Life time Curve	/		Updated	
		Min PF, Max THD, Temperature Coefficient	/		Added	
2013-1-10	I	Turn-on delay time	1s	3s	1s	2s
			0.8s	2s	1s	2s
2018-10-26	J	CQC	CCC		Updated	
		PSE	/		Added	
		Features	5 Years Warranty		Added	
		Description	/		Updated	
		Models	/		Updated	
		Input Specifications	PF/THD		Updated	
		Output Specifications	Turn-on Delay Time		Updated	
		Temperature coefficient	Max 0.03%/°C		Typ 0.03%/°C	
		General Specifications	Operating Temperature for Tc_s	Case Safety	Updated	
		General Specifications	Operating Temperature for Tc_w	Case Warranty	Updated	
		General Specifications	Storage Temperature		Updated	
		Environmental Specifications	/		Deleted	
		Dimensions	With mounting ear		Added	
		Net Weight	850g		925g	
		Safety & EMC Compliance	/		Updated	
Max. Case Temperature	/		Deleted			
Lifetime vs. Case Temperature Curve	/		Updated			

## Revision History (Continued)

Change Date	Rev.	Description of Change		
		Item	From	To
2018-10-26	J	Mechanical Outline	/	Updated
2019-09-20	K	KS Logo	/	Added
		Features	Waterproof (IP67)	IP67
		Input Specifications (Power Factor / THD)	(72W-96W)	Added
		Safety &EMC Compliance	KS	Added
		Safety &EMC Compliance	J 55015	Deleted
		Safety &EMC Compliance	EN 61000-4-5	Updated
		Safety &EMC Compliance	Note	Added
		Derating Curve	/	Deleted
		RoHS Compliance	/	Updated
2021-09-29	L	Models	Typical Efficiency	Updated
		General Specifications	Efficiency @120 Vac input:	Updated
		General Specifications	Efficiency @220 Vac input:	Updated
2023-10-16	M	PSE logo	/	Deleted
		Safety &EMC Compliance	/	Updated
2026-04-07	N	Format	/	Updated
		Product Photograph	/	Updated
		BIS logo	/	Added
		Models	Notes	Updated
		Safety &EMC Compliance	/	Updated