

Features

- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with Programmability
- Isolated 1-5V/1-10V/10V PWM/3-Timer-Modes Dimmable
- Output Lumen Compensation
- Input Surge Protection: DM 6kV, CM 10kV
- All-Around Protection: OVP, SCP, OTP
- IP66/IP67
- SELV Output
- Suitable for Luminaires with Protection Class I and II
- 5 Years Warranty



Description






The EUM-200SxxxDE series is a 200W, constant-current, programmable and IP66/IP67 rated LED driver that operates from 90-305Vac input with excellent power factor. It is created for many lighting applications including high bay, high mast and roadway etc. The high efficiency of these drivers and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, output over voltage, short circuit, and over temperature.

Models

Adjustable Output Current Range(mA)	Full-Power Current Range(mA) ⁽¹⁾	Default Output Current(mA)	Output Voltage Range(Vdc)	Max. Output Power(W)	Typical Efficiency ⁽²⁾	Typical Power Factor		Model Number ⁽³⁾⁽⁴⁾
						120Vac	220Vac	
53-700	530-700	530	142-378	200	94.0%	0.99	0.96	EUM-200S070DE
70-1050	700-1050	700	95-286	200	93.5%	0.99	0.96	EUM-200S105DE
105-1500	1050-1500	1050	67-190	200	93.0%	0.99	0.96	EUM-200S150DE
180-2800	1800-2800	2100	36-111	200	92.5%	0.99	0.96	EUM-200S280DE ⁽⁵⁾
350-5600	3500-5600	4200	18-57	200	92.5%	0.99	0.96	EUM-200S560DE ⁽⁵⁾

- Notes:** (1) Output current range with constant power at 200W.
 (2) Measured at 100% load and 220Vac input (see below "General Specifications" for details).
 (3) Certified input voltage range: 100-240Vac.
 (4) All the models are certificated to KS, except EUM-200S070DE and EUM-200S105DE.
 (5) SELV output.

I-V Operation Area

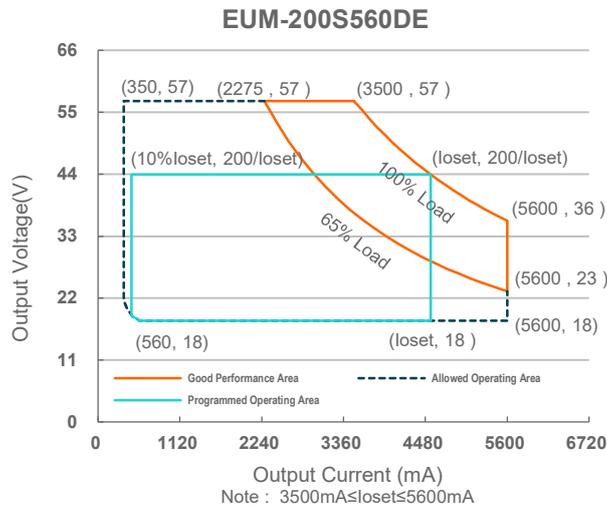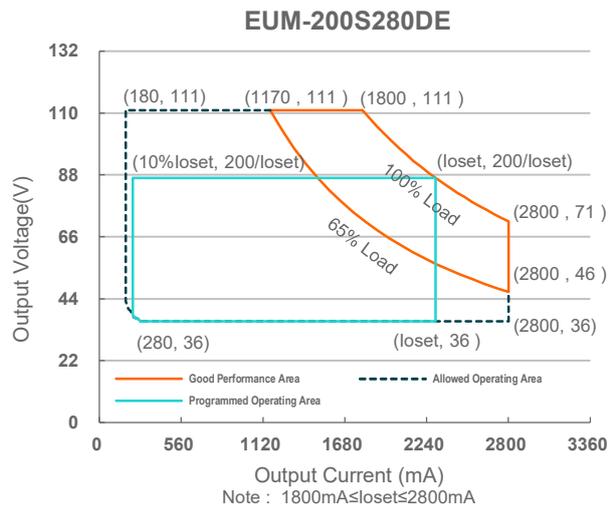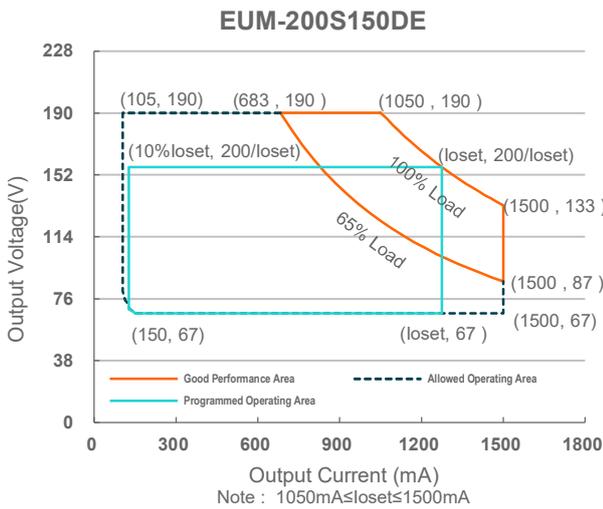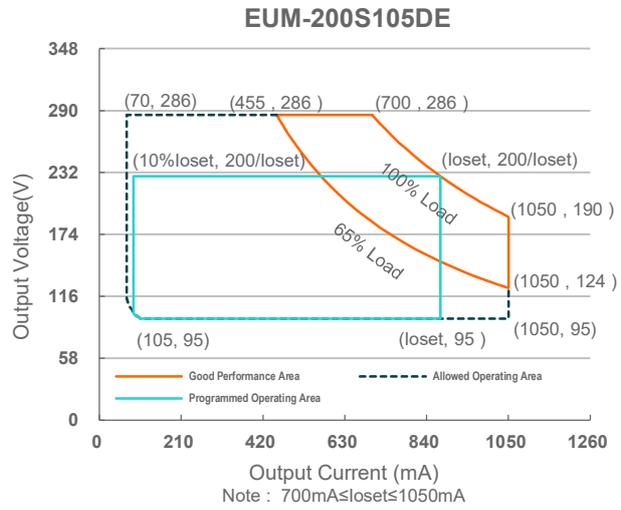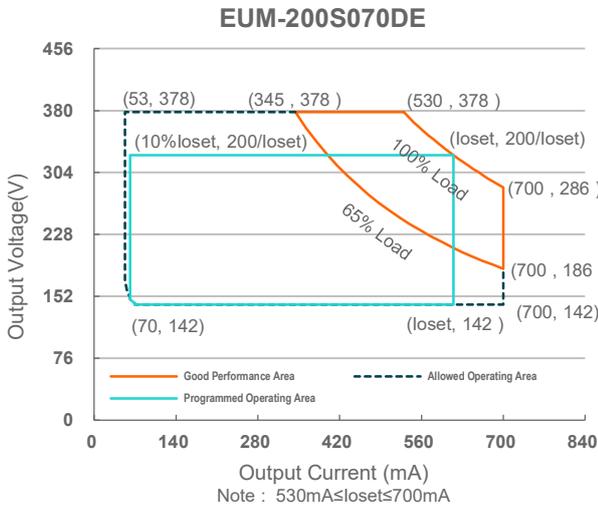

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input AC Voltage	90 Vac	-	305 Vac	
Input DC Voltage	127 Vdc	-	300 Vdc	
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	0.70 mA	IEC 60598-1; 240Vac/60Hz
Input AC Current	-	-	2.00 A	Measured at 100% load and 120 Vac input.
	-	-	1.05 A	Measured at 100% load and 220 Vac input.
Inrush Current(I ² t)	-	-	4.20 A ² s	At 220Vac input, 25°C cold start, duration=848 μs, 10%I _{pk} -10%I _{pk} .
PF	0.9	-	-	At 100-277Vac, 50-60Hz, 65%-100% Load (130-200W)
THD	-	-	20%	
THD	-	-	10%	At 220-240Vac, 50-60Hz, 75%-100% Load (150-200W)

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%loset	-	5%loset	At 100% load condition
Output Current Setting(loset) Range				
EUM-200S070DE	53 mA	-	700 mA	
EUM-200S105DE	70 mA	-	1050 mA	
EUM-200S150DE	105 mA	-	1500 mA	
EUM-200S280DE	180 mA	-	2800 mA	
EUM-200S560DE	350 mA	-	5600 mA	
Output Current Setting Range with Constant Power				
EUM-200S070DE	530 mA	-	700 mA	
EUM-200S105DE	700 mA	-	1050 mA	
EUM-200S150DE	1050 mA	-	1500 mA	
EUM-200S280DE	1800 mA	-	2800 mA	
EUM-200S560DE	3500 mA	-	5600 mA	
Total Output Current Ripple (pk-pk)	-	5%I _{omax}	10%I _{omax}	At 100% load condition. 20 MHz BW
Output Current Ripple at < 200 Hz (pk-pk)	-	2%I _{omax}	-	At 100% load condition. Only this component of ripple is associated with visible flicker.
Startup Overshoot Current	-	-	10%I _{omax}	At 100% load condition
No Load Output Voltage				
EUM-200S070DE	-	-	420 V	
EUM-200S105DE	-	-	320 V	
EUM-200S150DE	-	-	210 V	
EUM-200S280DE	-	-	120 V	
EUM-200S560DE	-	-	65 V	
Line Regulation	-	-	±0.5%	Measured at 100% load
Load Regulation	-	-	±1.5%	

Output Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Turn-on Delay Time	-	-	0.5 s	Measured at 120-277Vac input, 65%-100% Load
Temperature Coefficient of loset	-	0.03%/°C	-	Case temperature = 0°C ~Tc max

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 120 Vac input: EUM-200S070DE				Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Io= 530 mA	89.0%	91.0%	-	
Io= 700 mA	89.5%	91.5%	-	
EUM-200S105DE				
Io= 700 mA	88.5%	90.5%	-	
Io=1050 mA	89.0%	91.0%	-	
EUM-200S150DE				
Io=1050 mA	88.5%	90.5%	-	
Io=1500 mA	88.5%	90.5%	-	
EUM-200S280DE				
Io=1800 mA	87.0%	89.0%	-	
Io=2800 mA	87.0%	89.0%	-	
EUM-200S560DE				
Io=3500 mA	87.5%	89.5%	-	
Io=5600 mA	87.0%	89.0%	-	
Efficiency at 220 Vac input: EUM-200S070DE				Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Io= 530 mA	92.0%	94.0%	-	
Io= 700 mA	92.0%	94.0%	-	
EUM-200S105DE				
Io= 700 mA	91.5%	93.5%	-	
Io=1050 mA	91.5%	93.5%	-	
EUM-200S150DE				
Io=1050 mA	91.0%	93.0%	-	
Io=1500 mA	91.0%	93.0%	-	
EUM-200S280DE				
Io=1800 mA	90.5%	92.5%	-	
Io=2800 mA	90.0%	92.0%	-	
EUM-200S560DE				
Io=3500 mA	90.5%	92.5%	-	
Io=5600 mA	90.0%	92.0%	-	
Efficiency at 277 Vac input: EUM-200S070DE				Measured at 100% load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
Io= 530 mA	92.0%	94.0%	-	
Io= 700 mA	92.5%	94.5%	-	
EUM-200S105DE				
Io= 700 mA	92.0%	94.0%	-	
Io=1050 mA	92.0%	94.0%	-	
EUM-200S150DE				
Io=1050 mA	91.5%	93.5%	-	
Io=1500 mA	91.5%	93.5%	-	
EUM-200S280DE				
Io=1800 mA	91.0%	93.0%	-	
Io=2800 mA	90.5%	92.5%	-	
EUM-200S560DE				
Io=3500 mA	91.0%	93.0%	-	
Io=5600 mA	90.0%	92.0%	-	

General Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
MTBF	-	267,000 Hours	-	Measured at 220Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F)
Lifetime	-	100,000 Hours	-	Measured at 220Vac input, 80%Load and 70°C case temperature; See lifetime vs. Tc curve for the details
Operating Case Temperature for Safety Tc _s	-40°C	-	+90°C	
Operating Case Temperature for Warranty Tc _w	-40°C	-	+80°C	Case temperature for 5 years warrant Humidity: 10% RH to 95% RH;
Storage Temperature	-40°C	-	+85°C	Humidity: 5%RH to 95%RH
Dimensions Inches (L × W × H) Millimeters (L × W × H)	6.93 × 2.36 × 1.44 176 × 60 × 36.5			With mounting ear 7.60 × 2.36 × 1.44 193 × 60 × 36.5
Net Weight	-	780 g	-	

Dimming Specifications

Parameter	Min.	Typ.	Max.	Notes	
Absolute Maximum Voltage on the Vdim (+) Pin	-20 V	-	20 V		
Source Current on Vdim (+)Pin	200 uA	300 uA	450 uA	Vdim(+) = 0 V	
Dimming Output Range	EUM-200S070DE EUM-200S105DE EUM-200S150DE EUM-200S280DE EUM-200S560DE	10%I _{load}	-	I _{load}	530 mA ≤ I _{load} ≤ 700 mA 700 mA ≤ I _{load} ≤ 1050 mA 1050 mA ≤ I _{load} ≤ 1500 mA 1800 mA ≤ I _{load} ≤ 2800 mA 3500 mA ≤ I _{load} ≤ 5600 mA
	EUM-200S070DE EUM-200S105DE EUM-200S150DE EUM-200S280DE EUM-200S560DE	53 mA 70 mA 105 mA 180 mA 350 mA	-	I _{load}	53 mA ≤ I _{load} ≤ 530 mA 70 mA ≤ I _{load} < 700 mA 105 mA ≤ I _{load} < 1050 mA 180 mA ≤ I _{load} < 1800 mA 350 mA ≤ I _{load} < 3500 mA
Recommended Dimming Range for 1-5V	0.25 V	-	4.75 V	Dimming mode set to 1-5V in PC interface.	
Recommended Dimming Range for 1-10V	1 V	-	9 V	Default 1-10V dimming mode with positive logic.	
PWM_in High Level	-	10V	-		
PWM_in Low Level	-	0V	-		
PWM_in Frequency Range	200 Hz	-	2 KHz		
PWM_in Duty Cycle	0%	-	100%		


Safety & EMC Compliance

Safety Category	Standard
ENEC & CE	EN 61347-1 ⁽¹⁾ , EN 61347-2-13
CB	IEC 61347-1 ⁽¹⁾ , IEC 61347-2-13
KS	KS C 7655
Performance	Standard
ENEC	EN IEC 62384
EMI Standards	Notes
EN IEC 55015 ⁽²⁾	Conducted emission Test & Radiated emission Test
EN IEC 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: Differential Mode 6 kV, Common Mode 10 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment


Note: (1) This product meets the requirements for IEC/EN 61347-1(Class II), when the driver is energized, the allowed leakage current is perceptible but harmless.

(2) This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.


Derating

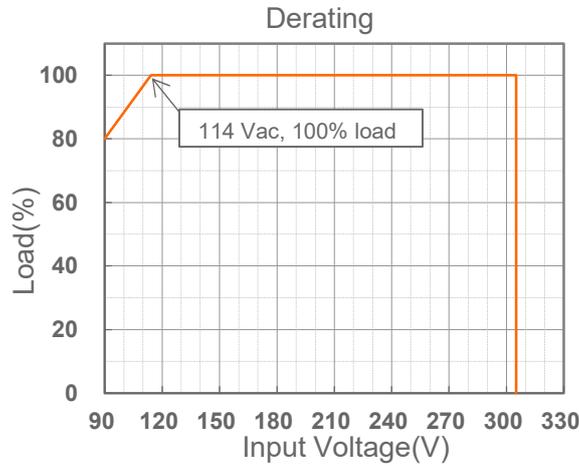

Lifetime vs. Case Temperature

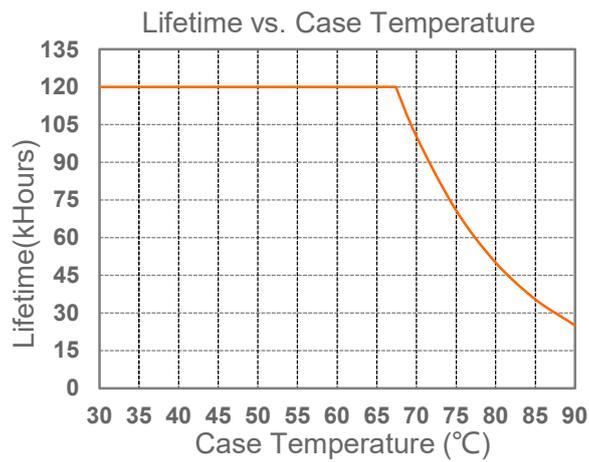

Inrush Current Waveform

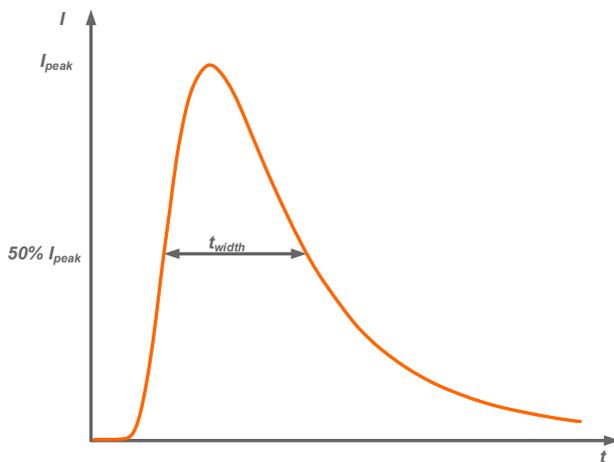


Input AC Voltage	I_{peak}	t_{width} (@ 50% I_{peak})
120Vac	40.4A	352 μ s
220Vac	81.5A	336 μ s
277Vac	106A	328 μ s


MCB	Tripping Curves	B	B	B	B	C	C	C	C
	Rated Current	10A	16A	20A	25A	10A	16A	20A	25A
The Number of LED Driver can be Configured	120	3	5	6	8	3	6	7	9
	220	2	4	5	7	4	7	9	12
	277	2	3	4	5	3	5	7	9

Efficiency vs. Load


EUM-200S070DE (Io=530mA)
Efficiency vs. Output Voltage

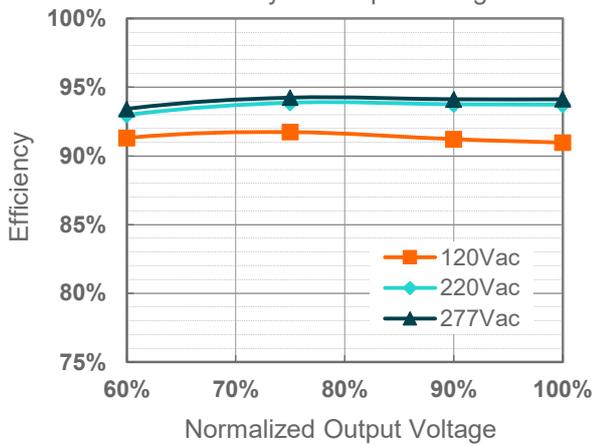


EUM-200S070DE (Io=700mA)
Efficiency vs. Output Voltage

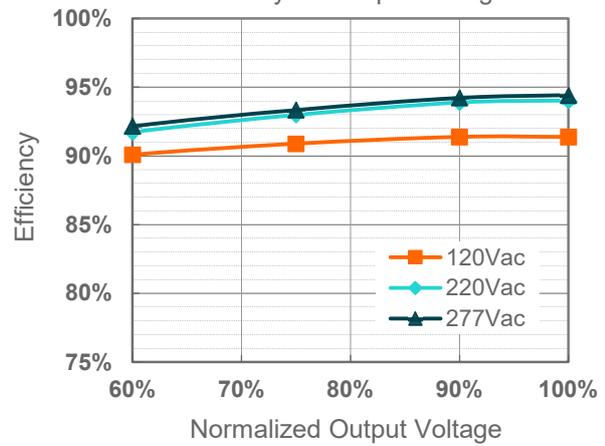

EUM-200S105DE (Io=700mA)
Efficiency vs. Output Voltage

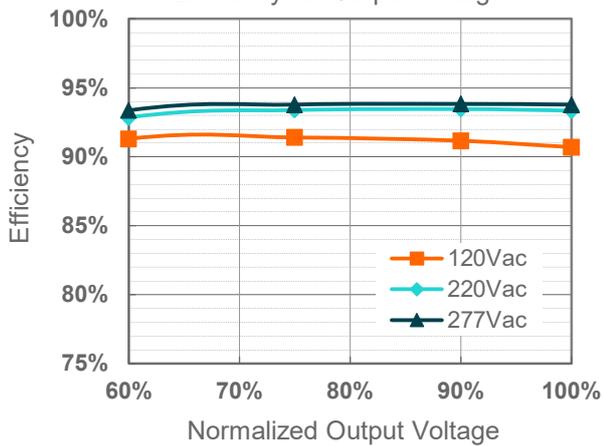


EUM-200S105DE (Io=1050mA)
Efficiency vs. Output Voltage

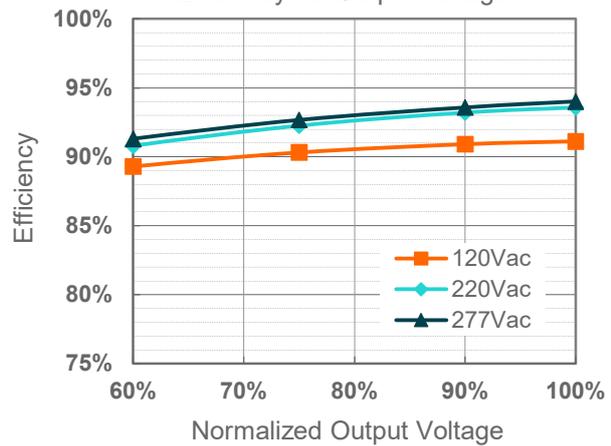


EUM-200S150DE($I_o=1050mA$)

Efficiency vs. Output Voltage

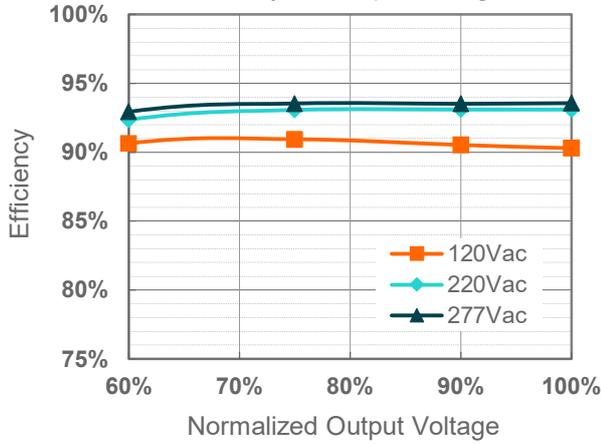


EUM-200S150DE($I_o=1500mA$)

Efficiency vs. Output Voltage

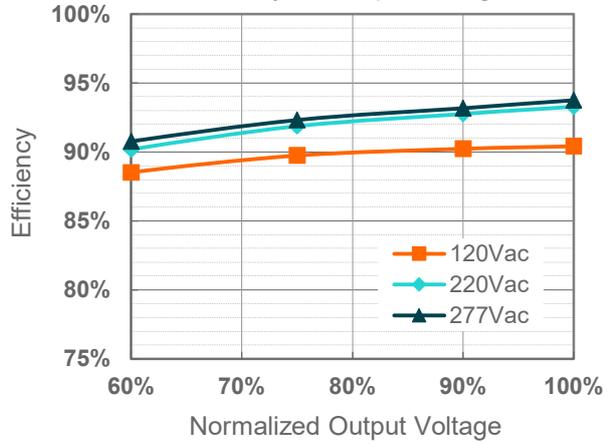


EUM-200S280DE($I_o=1800mA$)

Efficiency vs. Output Voltage

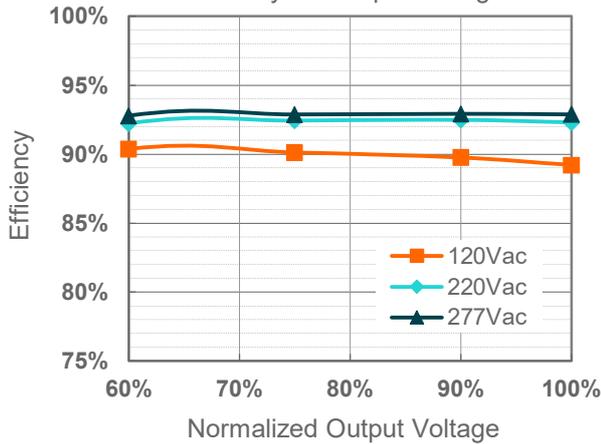


EUM-200S280DE($I_o=2800mA$)

Efficiency vs. Output Voltage

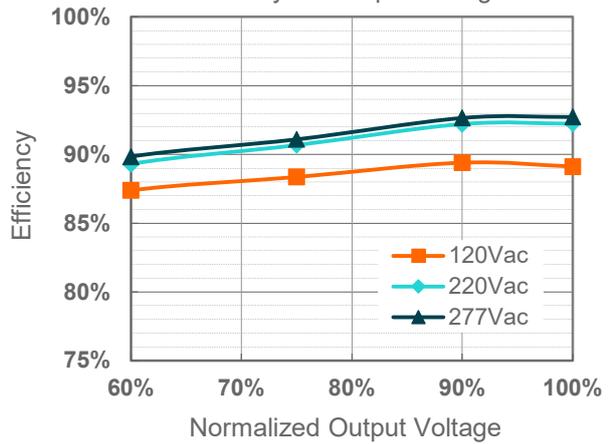


EUM-200S560DE($I_o=3500mA$)

Efficiency vs. Output Voltage

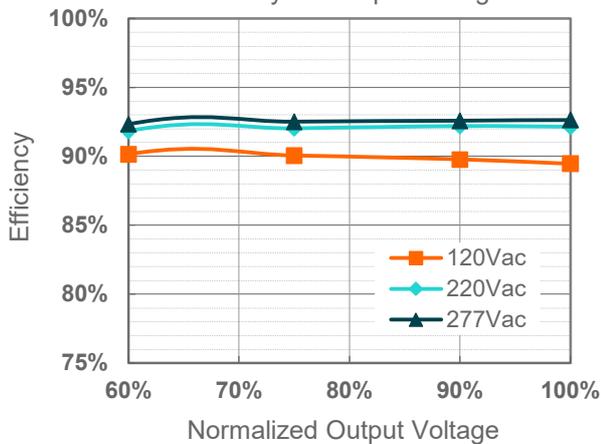


EUM-200S560DE($I_o=5600mA$)


Efficiency vs. Output Voltage

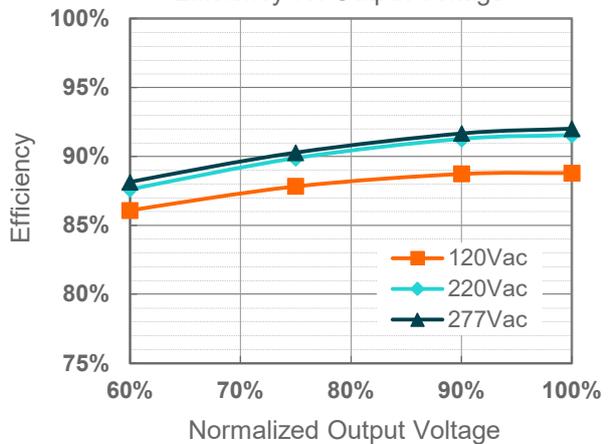

Power Factor

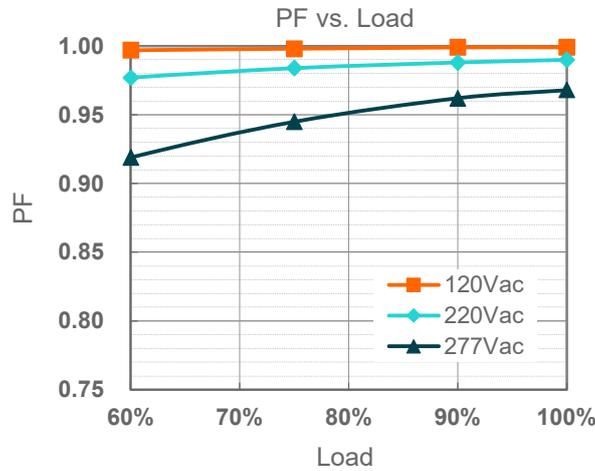

Total Harmonic Distortion

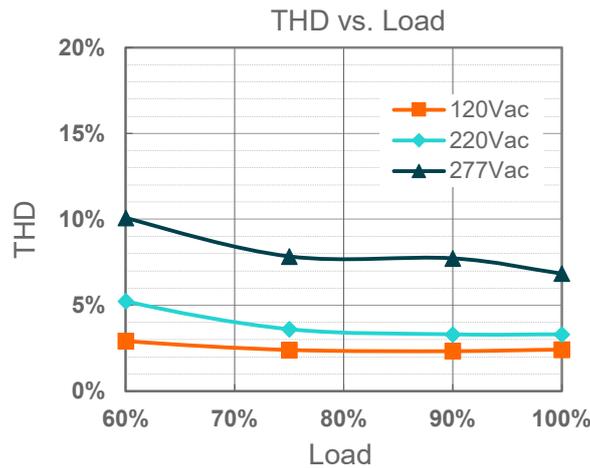



Protection Functions

Parameter	Notes
Over Temperature Protection	Decreases output current, returning to normal after over temperature is removed.
Short Circuit Protection	Auto Recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.
Over Voltage Protection	Limits output voltage at no load and in case the normal voltage limit fails.

Dimming

● 1-5V Dimming

The recommended implementation of the dimming control is provided below.

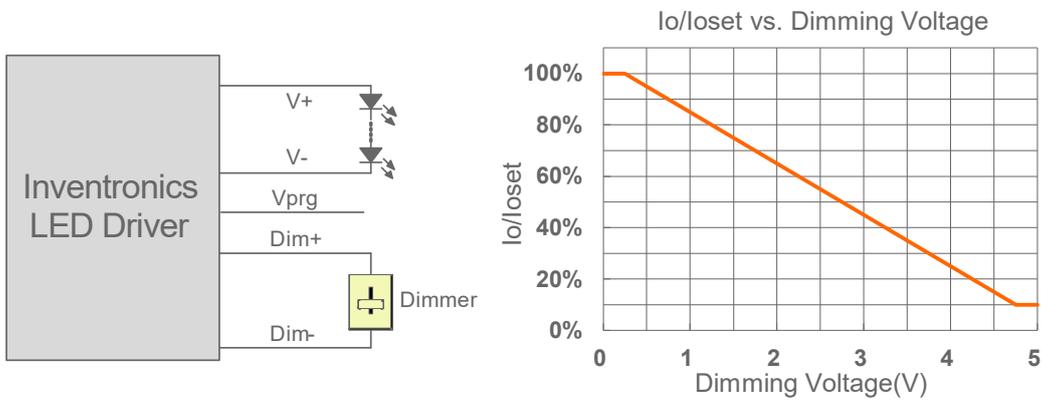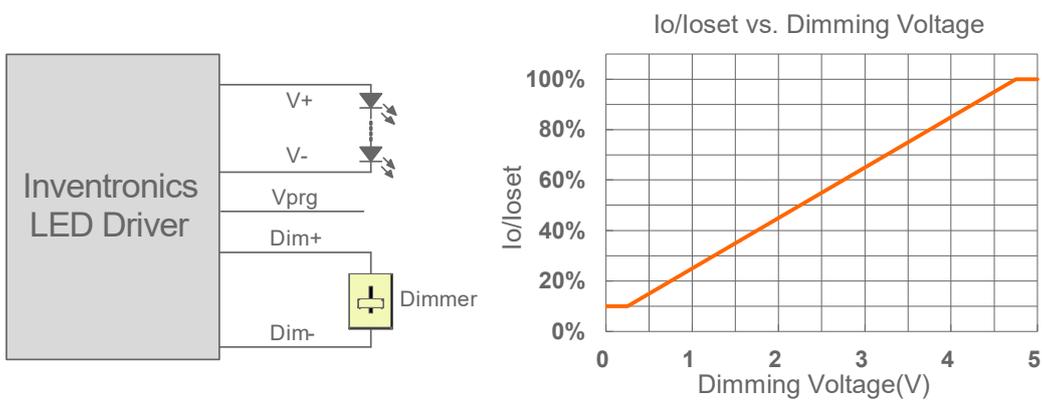



Notes:

1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. The dimmer can also be replaced by an active 1-5V voltage source signal or passive components like zener.
3. When 1-5V negative logic dimming mode and Dim+ is open, the driver will output maximum current.

● **1-10V Dimming**

The recommended implementation of the dimming control is provided below.

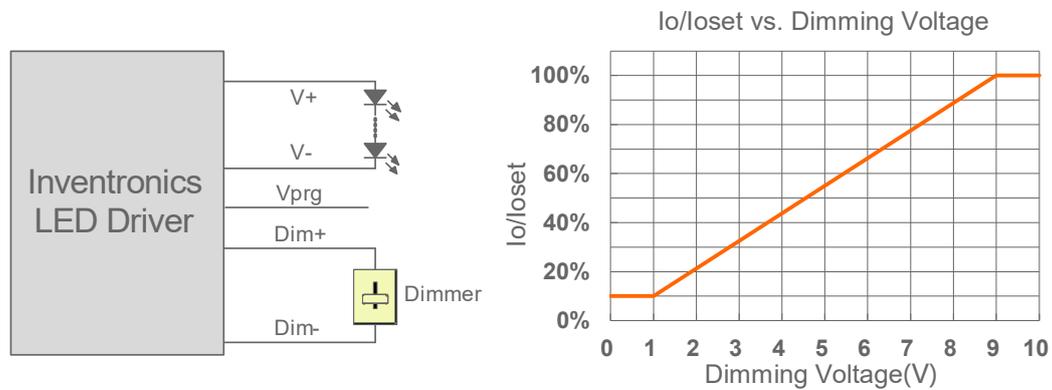

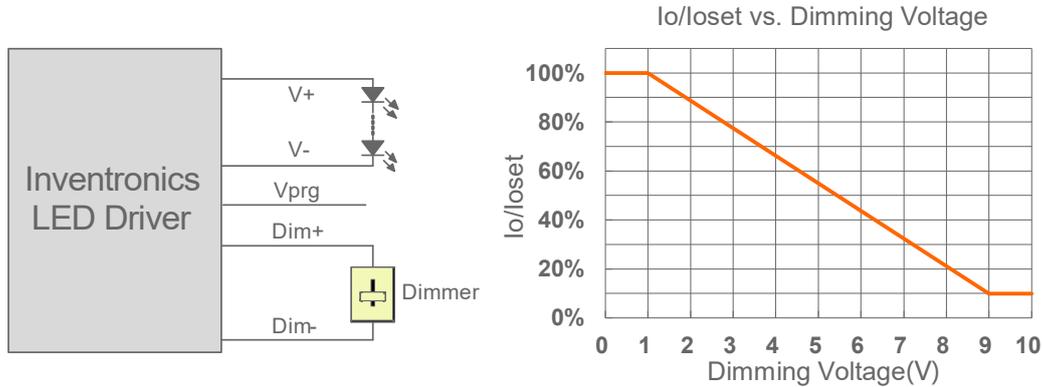


Implementation 4: Negative logic

Notes:


1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. The dimmer can also be replaced by an active 1-10V voltage source signal or passive components like zener.
3. When 1-10V negative logic dimming mode and Dim+ is open, the driver will output minimum current.

● **10V PWM Dimming**

The recommended implementation of the dimming control is provided below.

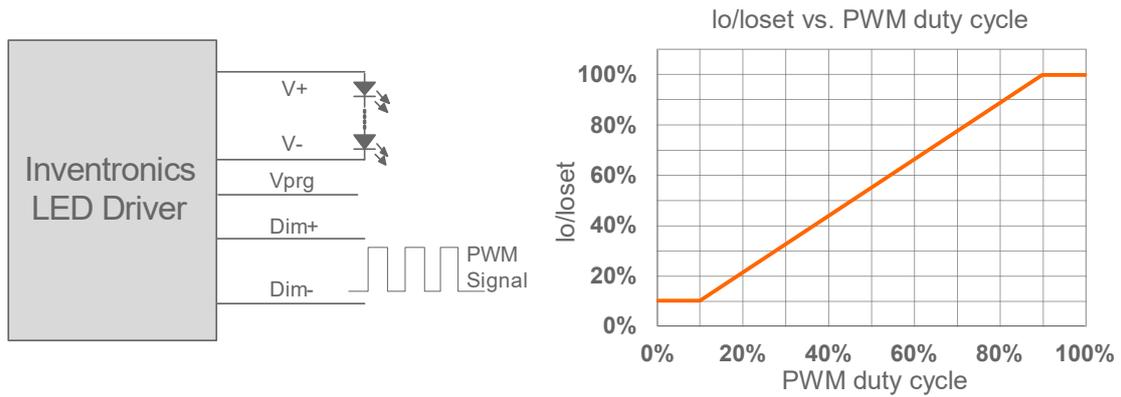

Implementation 5: Positive logic

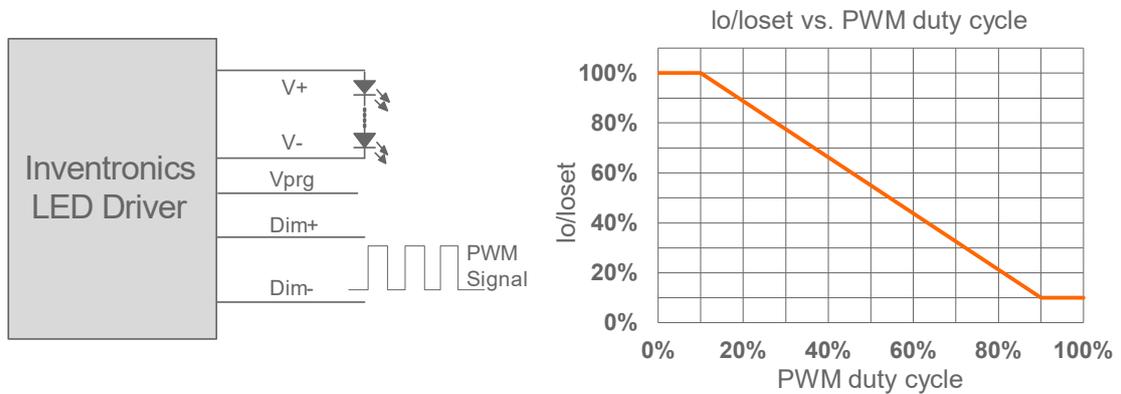

Implementation 6: Negative logic

Notes:

1. Do NOT connect Dim- to the output V- or V+, otherwise the driver will not work properly.
2. When 10V PWM negative logic dimming mode and Dim+ is open, the driver will output minimum current.

● **Time Dimming**


Time dimming control includes 3 kinds of modes, they are Self Adapting-Midnight, Self Adapting-Percentage and Traditional Timer.

- **Self Adapting-Midnight:** Automatically adjusts the dimming curve based on the on-time of past two days (if difference <15 minutes), assuming that the center point of the dimming curve is midnight local time.
- **Self Adapting-Percentage:** Automatically adjusts the on-time of each step by a constant percentage = (actual on-time for the past 2 days if difference <15 min) / (programmed on-time from the dimming curve).
- **Traditional Timer:** Follows the programmed timing curve after power on with no changes.

● **Output Lumen Compensation**

Output Lumen Compensation (OLC) may be used to maintain constant light output over the life of the LEDs by driving them at a reduced current when new, then gradually increasing the drive current over time to counteract LED lumen degradation.

Programming Connection Diagram

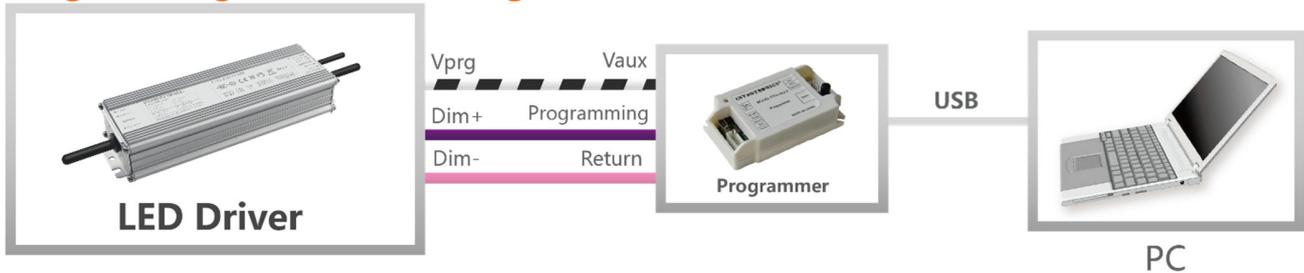


Note: The driver does not need to be powered on during the programming process.

- Please refer to [PRG-MUL2 \(Programmer\) datasheet](#) for details.


Mechanical Outline

EUM-200S070DE/EUM-200S105DE/EUM-200S150DE

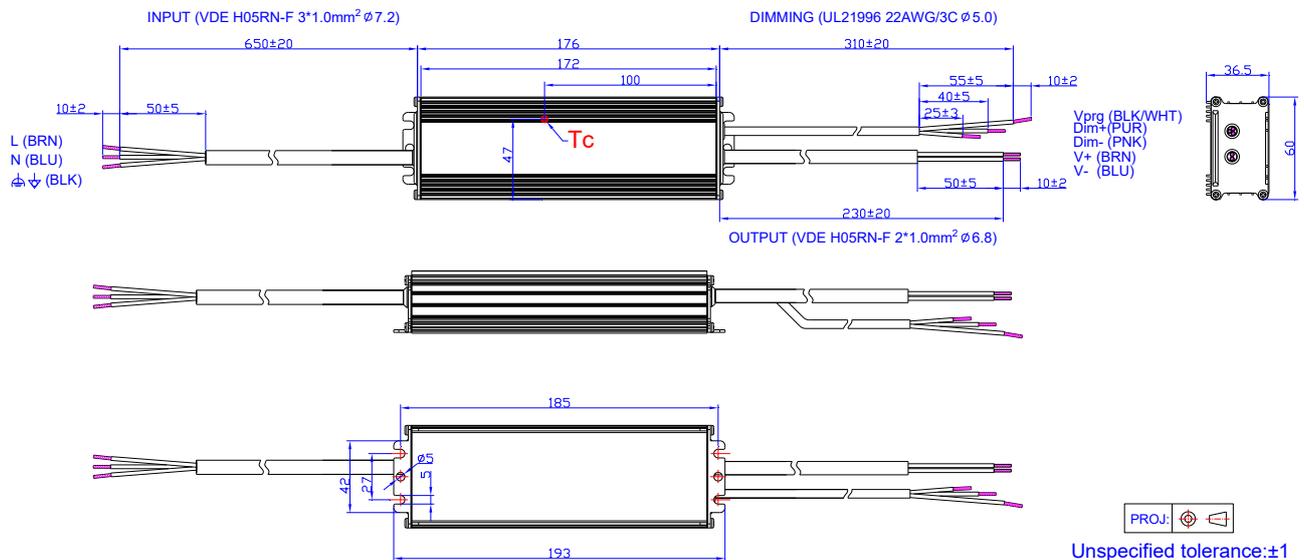

Unspecified tolerance:±1

EUM-200S280DE/EUM-200S560DE

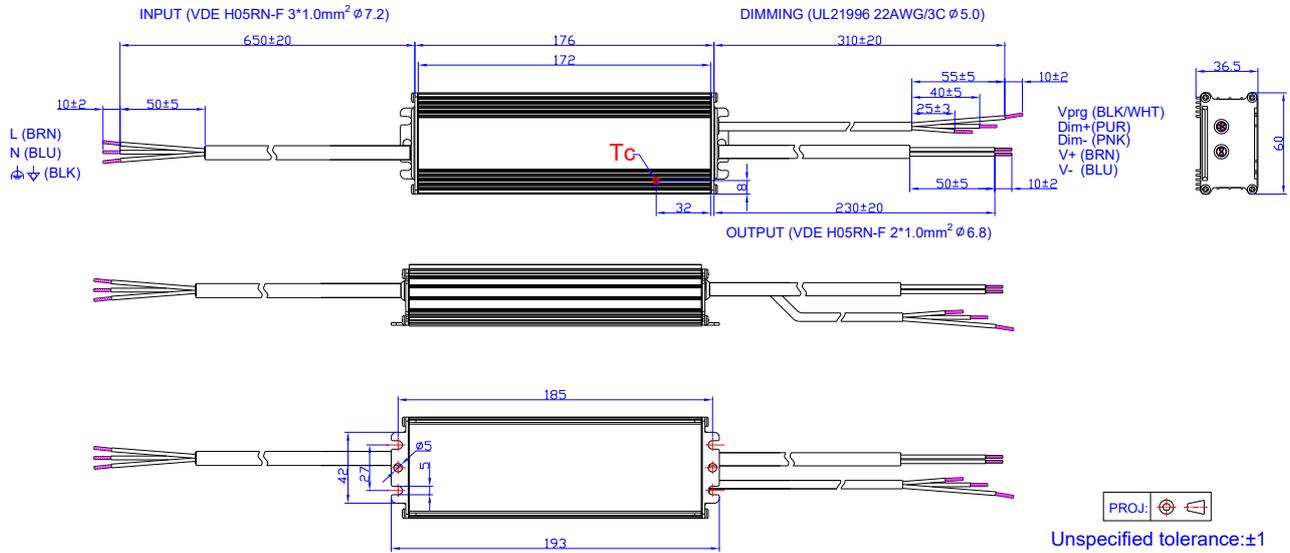

RoHS Compliance

Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2021-11-11	A	Datasheet Release	/	/
2022-07-05	A1	Safety & EMC Compliance	/	Updated
2023-06-09	B	Product Photograph	/	Updated
		Safety & EMC Compliance	/	Updated
		Programming Connection Diagram	/	Updated
		Mechanical Outline	/	Updated
2026-03-04	C	Format	/	Updated
		Product Photograph	/	Updated
		UKCA logo	/	Deleted
		Safety & EMC Compliance	/	Updated
		Inrush Current Waveform	/	Updated