

► APAC Region

Inventronics

Inventronics Science and Technology Park, #459 Jianghong Road, Binjiang District, Hangzhou, Zhejiang, China, 310052
Tel: +86-571-56565800
Fax: +86-571-86601139
E-mail: sales@inventronicsglobal.com

Inventronics Shenzhen

2F,Block B,Jianxing Technology Building,No.3151 Shahe West Road,Nanshan District, Shenzhen, China
Tel: +86-571-56565800
Fax: +86-571-86601139
E-mail: sales@inventronicsglobal.com

Inventronics Indonesia

JB Tower 10th floor
Jl. Kebon Sirih no. 48-50 Gambir,Jakarta, 10110, Indonesia
Tel: +62 21 5095 8096
Email: Evy.i@inventronicsglobal.com

Inventronics Singapore

7 Holland Village Way,
Lobby B, #05-03 / 04 / 05,
Singapore 275748
Tel: +65 9337 5247
E-mail: Colin.Tan@inventronicsglobal.com

► Europe Region

Inventronics Netherlands

Polluxstraat 21, 5047 RA Tilburg, The Netherlands
Tel: +31-857-470-061
Fax: +31-857-470-062
Email: eu-sales@inventronicsglobal.com

Inventronics Italy

Via Castagnole 65/A, 31100 Treviso, Italy
Email: support@inventronicsglobal.com

► Americas Region

Inventronics USA

2825 S Tulsa Ave. Oklahoma City, OK 73108 USA
Tel: +1-405-600-7480
Fax: +1-405-600-9715
E-mail: usa-sales@inventronicsglobal.com

Inventronics Brazil

Tel: +55(11)2680-8310
E-mail: brazilsales@inventronicsglobal.com

► India Region

Inventronics India

Head Office: 4th & 5th Floor, B-Wing, Skyheights, Valipeer Road, Kalyan (west), Pin Code-421301
Factory: Survey No.15, All India Logistics Park, Janval Village, Lonad Village Road, Taluka- Bhiwandi -421 302-Thane
Tel: +91-9845054416
E-mail: in-sales@inventronicsglobal.com

Inventronics Guangzhou

Room 1105-1107, Clifford Corporate Center Building
No. 15, Fuhua Road, Clifford Estate 511496 Panyu,
Guangzhou City, Guangdong Province, China
E-mail: ds_mktg@inventronicsglobal.com

Inventronics East Asia

Suite-615, 501, Teheran-ro, Gangnam-gu,
Seoul, Republic of Korea (06168)(V-flex)
Email: kr-sales@inventronicsglobal.com

Inventronics Malaysia

Level 4, Uptown 7, Jalan SS21/39, Damansara Utama,
47400 Petaling Jaya, Selangor, Malaysia
Tel: +6012 398 1085
E-mail: david.khong@inventronicsglobal.com

Inventronics Thailand

Tel: +6695 545 2893
E-mail: nuntanai@inventronicsglobal.com

Inventronics Vietnam

E-mail: Colin.Tan@inventronicsglobal.com
Tel: +65 9337 5247
E-mail: P.thuhang@inventronicsglobal.com
Tel: +84948286686

Inventronics Germany

Parking 31-33, 85748 Garching, Germany
Email: support@inventronicsglobal.com

Inventronics France

18 Rue Gaston Romazzotti, 67120 Molsheim, France
Tel: +33 3 68 41 88 99
Email: support@inventronicsglobal.com

Inventronics Mexico

Carretera San Martín de las Flores #520
Building 8A Parque Industrial Prologis El Salto
San Pedro Tlaquepaque, Jalisco, Mexico
Tel: +521 3338634039
E-mail: usa-sales@inventronicsglobal.com



Scan this QR code for more regional sales contacts.



inventronicsglobal.com

inventronics

Inventronics Lighting Systems



Street and Area



Sports



Horticulture



Industrial



Architectural



Commercial



Retail



Signage



Horticulture



Sports



Industrial



Commercial



Street and Area



Architectural



Retail



Signage

Rebranding Our Products from OSRAM to Inventronics

Important Information for Our Customers

Valued Customer, we are pleased to inform you about an important update: following the acquisition of OSRAM Digital Systems by Inventronics in 2023, to ensure continuity of the quality and reliability of the products you trust, **all OSRAM Digital Systems products will transition to the Inventronics brand starting in 2025**, with OSRAM-branded deliveries ending in **March 2026**.




Why this change?

This transition protects the value of the technology, expertise and innovation that power your products and lighting solutions. While the OSRAM name will continue to appear in the marketplace, the trusted knowledge, original teams and proven processes are now part of Inventronics – your dedicated partner in advanced lighting technology.


Inventronics not only ensures you keep the access to the proven performance, innovation, and reliability that have been integral to OSRAM Digital Systems in the past, **but expands its capabilities to provide system solutions in your target application at a global scale.**

What is changing?




New Branding

The OSRAM logo on labels, packaging, documents, and certificates will be replaced by the Inventronics logo




Same Products

Features, names, and in most cases, certification numbers will remain unchanged.



New EANs

Each existing product will receive a new EAN for the Inventronics version, ensuring traceability.



Further Development by Inventronics

All future developments of these products will be handled by Inventronics, leveraging the proven expertise and high quality you have come to expect from OSRAM.

Certifications and Documentation

Consistency Ensured: Since 2023, our products have been listed under “Inventronics” in CB and ENEC certifications. After the transition, rebranded products will retain their certifications, ensuring your existing luminaire certifications remain valid.

Rebranding Without Compromise: Thanks to close coordination with certification bodies, the rebranding will be transparent, with no changes to the technical core functionalities.

CONTENTS



About Inventronics P01 - P02



Street and Area

P03 - P40



Sports

P41 - P68



Horticulture

P69 - P96



Industrial

P97 - P134



Architectural

P135 - P176



Commercial

P177 - P214



Retail, Hospitality and Residential

P215 - P280



Signage

P281 - P308

About Inventronics

Building a Brighter Future

Inventronics is a premier global producer of cutting-edge lighting solutions such as LED drivers, sensors, control systems, and LED modules. With a strong commitment to quality, reliability, and compliance with international standards, we deliver innovative and efficient solutions to our customers worldwide. The acquisition of OSRAM Digital Systems in Europe and Asia in 2023 has strengthened our portfolio, development, capabilities, and expanded our global reach.



ALL FIELDS OF APPLICATION



Why Choose Us?

A Broad Portfolio Of Dependable Products

You benefit from industry-leading comprehensive portfolio of indoor and outdoor high-quality, energy-efficient products and systems as well technical expertise in all lighting applications from a single source.

A Customer-Focused, Service-Driven Collaborator

We develop for and together with you best fitting components and solutions – from standard to customized.

A Forward-Looking, Global Enterprise

We provide consulting, know-how, products, and services from a single source worldwide. Our customer proximity is our core – with on-site contacts and direct connections, you benefit from our global reach.

An Innovative Technology Leader

Through continuous research and development, we improve and extend our range of highly reliable solutions with advanced technologies that ensure you are one step ahead.

A Trusted Partner for Lighting Companies and beyond

We don't compete with our customers; we work with you to create value and make you more successful.

At Inventronics, we are committed to delivering superior lighting solutions and building lasting partnerships for a brighter future.



Light is safety

Street & Area lighting improves safety, efficiency, and quality of life. LED lighting and smart technology creates sustainable, vibrant cities by guiding pedestrians, transforming spaces, and ensuring safe vehicle transitions.

Expertise

Light is necessary to travel safely on streets at night.
We provide a complete set of LED modules and drivers that can be adjusted to the optimal level by sensing traffic and daylight.



High ratio of light



Intelligent control system




Light dimming

System Value

- Robust lighting system solutions with full range of accessories.
- Reliable design for a long product life span and low maintenance.
- Simple and intelligent control systems for easy installation, commissioning and inspection.
- Complies with several dimming and control standards such as 0-10V, DALI-2 and D4i.
- System compatibility between drivers, modules, surge protection devices and controls solutions (wired and wireless).
- Fully complies with safety requirement and regulations.

Lighting System Solutions

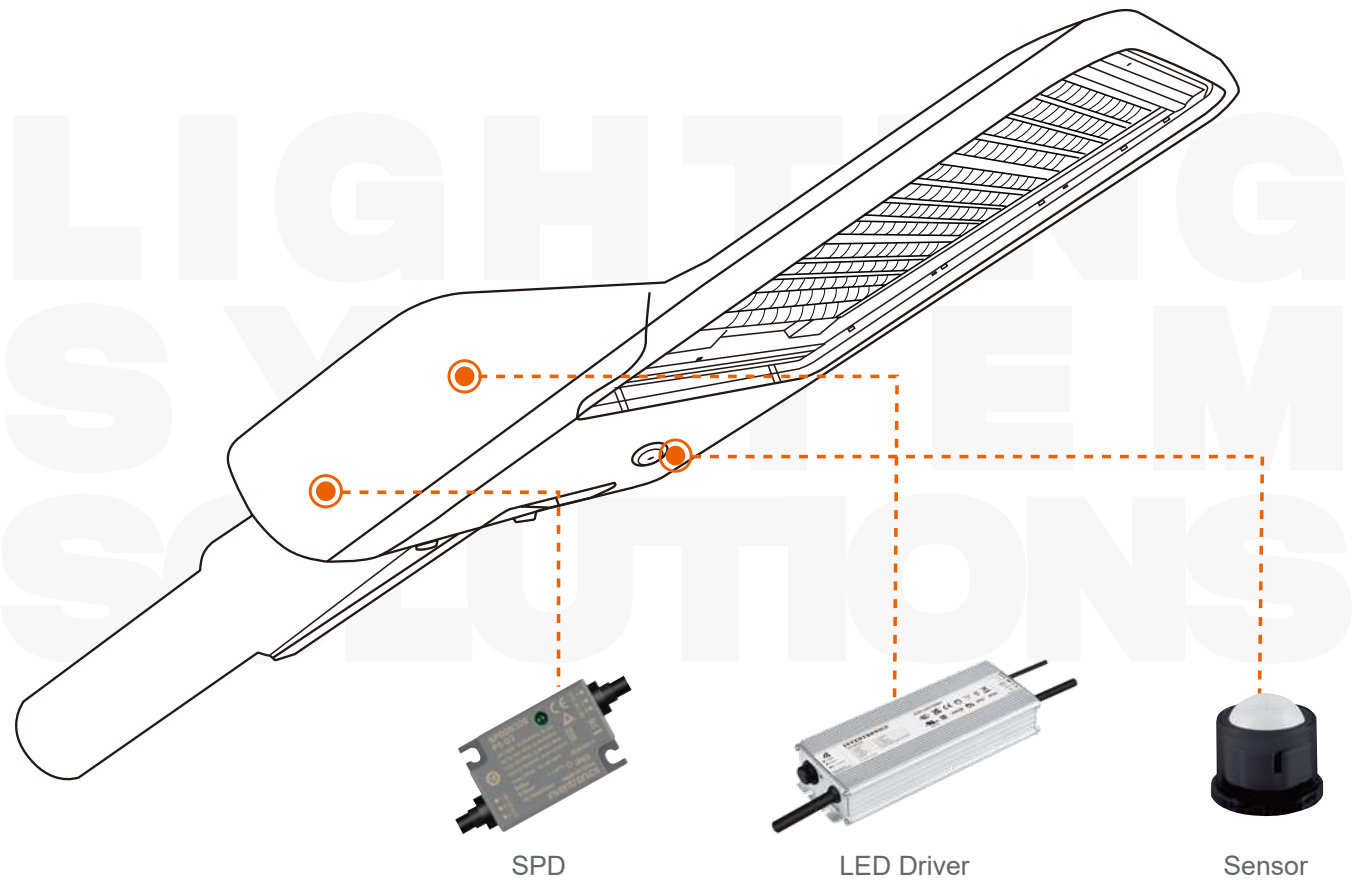

Sub-applications



Roads



Tunnels



Streets and Urban



Areas


Inventronics Cases

Engineering marvel, where world-class infrastructure meets Chinese innovation.
Shenzhong Link, China




Lighting ensures safety and comfort during nighttime travel.

Highway, Brazil

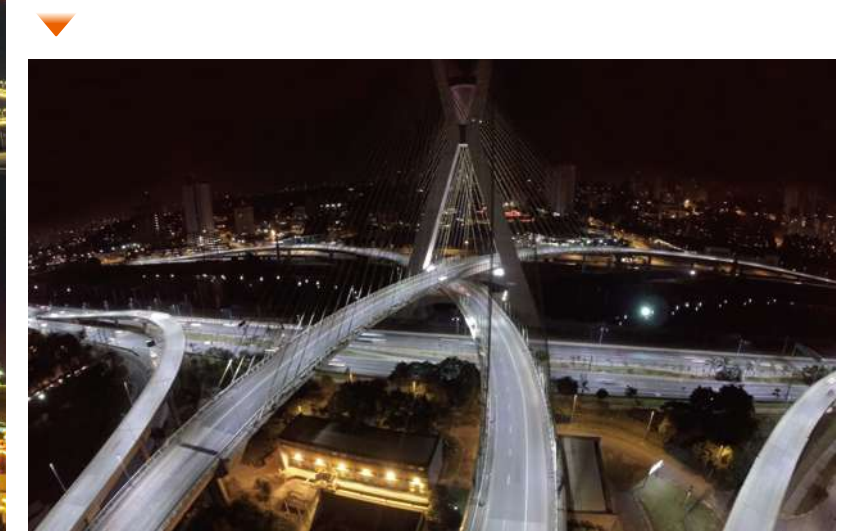

Where shimmering waters meet intelligent light,
a harmony of nature and innovation.
Yanqi Lake, Beijing, China

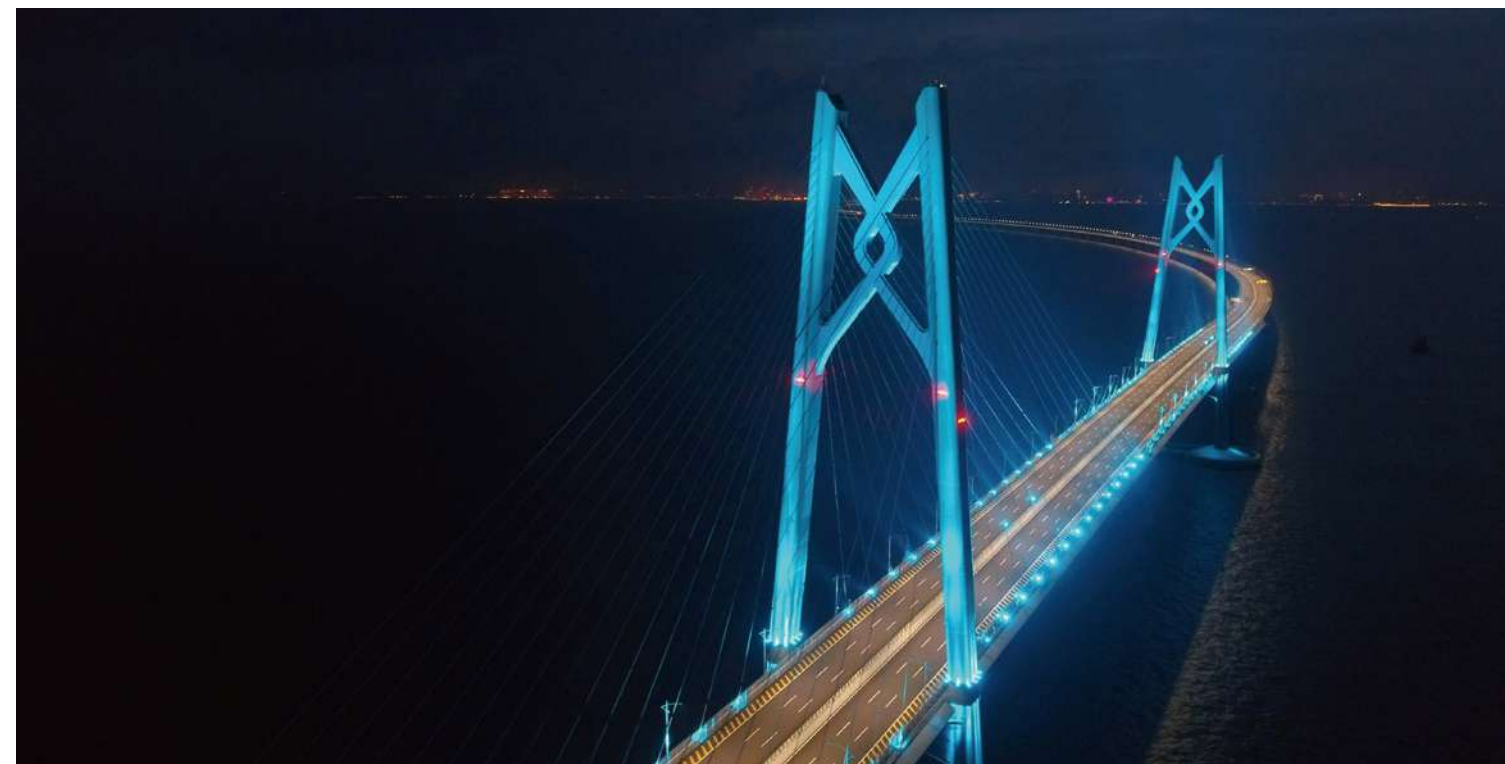

The world's longest sea-crossing bridge.
Hong Kong-Zhuhai-Macao Bridge, China



01 Controls, Sensors, Programming Tools & Accessories

1.1 Bluetooth NLC	Bluetooth NLC D4i Module Outdoor	11
1.2 Software	Tuner4TRONIC	12
	DALI Wizard	12
	HubSense R2G	12
1.3 Programming Tools	PRG-MUL2	12
	PRG-NFC-H	12
	PRG-NFC-D2	12
	DALI magic	12
1.4 Converters	CNV-DALI2	12

02 LED Driver & Accessories

2.1 Connected - Constant Current	OT DX NFC E/G2	13
	IT DX NFC E	15
	IT DALI E / IT DALI P5	17
	EBS-BT2/DT2	19
	OT 1DIM&4DIM NFC G3 CE	21
	EUM-Mx, ESM-Mx	23
	EUM-Bx, ESM-Bx	26
2.2 Simple DIM - Constant Current	IT 0-10 P67	29
	EUM-Dx	31
	EM DIM P	33
	EUM DF	34
2.3 Non Dimmable - Constant Current	EM P7 G2	35
2.4 Accessories	PU-10Kx05KBxA	37
	PU-20Kx10KTxx	37
	PU-20KS10KHT	37
	PS-20KS10KHT	37
	SPD G3	38

03 Light Modules & Accessories


3.1 Rigid	PrevaLED Brick	39
-----------	----------------	----



Advantages

- Microwave, PIR or light sensor
 - Bluetooth NLC enabled by Silvair
 - Control of D4i drivers or DALI drivers with additional DALI bus
 - power supply
 - Intended for installation to Zhaga socket 18
 - Works with Inventronics D4i LED drivers
- Standard communication protocol released by Bluetooth SIG
 - Design freedom due to standard dimensions
 - Easy to integrate in luminaire
 - Minimize internal wiring in combination with D4i drivers
 - Secured product communication granted by ioXT and PSA Certificates

Safety Certifications



Product Name	EAN
B NLC D4i HF P Z	6977078990486
B NLC D4i PD P Z	6977078990509
B NLC D4i LS P Z	6977078999519

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Software

Overview

Inventronics offers a comprehensive range of professional software solutions to support and configure its components.



Tuner4TRONIC

A software suite for OEMs that enables the configuration of all programmable OPTOTRONIC, ICUTRONIC, QUICKTRONIC, and POWERTRONIC LED drivers during the luminaire manufacturing process.



DALI Wizard

A GUI tool for setting up, analyzing, and diagnosing DALI ECG installations, used in combination with the DALI Wizard control device.



HubSense R2G

HubSense R2G simplifies smart lighting installation, offering seamless control and configuration via smartphone.



T4T



Apps

Programming Tools



PRG-MUL2 Features

- Programmer for All Inventronics DALI and 0-10V Programmable Drivers
- Offline Programming Capability
- Automatic Programming Mode



PRG-NFC-H Features

- For Use with Inventronics NFC Enabled Drivers
- Zhaga Book 24 Compliant
- USB Powered
- IP30
- Connects to Inventronics Multi-Programmer Software



PRG-NFC-D2 Features

- For Use with Inventronics NFC Enabled Drivers
- Zhaga Book 24 Compliant
- USB Powered
- IP42
- Connects to Inventronics Multi-Programmer Software



DALI magic Features

- USB DALI converter for Tuner4TRONIC and DALI wizard software for Windows PC
- Pushbutton to test DALI dimming without need of connection to computer
- Powered by USB or by included universal power supply
- Integrated automatic DALI supply of up to 64 devices (up to 4 if powered by USB)

Converters

DALI-2 CNV-DALI2



DALI-2 Stadium/Stage Lighting Management Solutions

Features

- Convert DALI-2 Signal to 0/1-10V Dimming Signal
- Comply with DALI-2 Protocol
- Powered By Auxiliary Power with 3-Wire Connection to Driver



Advantages

- For Zhaga Book18 Luminaires and D4i certified incl. Parts 25x + AUX
- Input Voltage Range: 176 ~ 264Vac
- Electrical interface and data communication fully based on open standards
- Fully programmable via software (DALI Interface, NFC)
- Low luminous efficacy tolerance through low output current tolerance of ± 1,5 %
- High surge protection: up to 10 kV in protection class I or II
- Lifetime: up to 100,000 h (depending on Tc temperature, max. 10 % failure rate)
- Mains input undervoltage protection
- DEXAL interface (with 15V current supply on DALI-2 lines - DALI Part 250)
- SELV DEXAL and 24V AUX interface (DALI Part 150) up to 6W
- Standardized DALI-2 communication (incl. monitoring data, energy metering)
- Integrated ESD protection: more robust for installation on non-conductive poles
- Optimized NFC for programming from the top: easy accessibility in luminaires
- Surge and overvoltage protection on DALI interface for DALI installations
- LSI port for additional sensors and accessories
- Full compatibility with Tuner4TRONIC and T4T Field App
- BOX Programming: all drivers in one BOX can be programmed in one step

Dimming Functions

StepDIM, AstroDIM (Timer) DALI DT6 and DT8

Safety Certifications



About OPTOTRONIC DEXAL

The OPTOTRONIC DEXAL series is a constant-current, programmable and IP20 built-in LED driver, that operates from 176 ~ 264Vac input voltage with excellent efficiency and power factor. It helps in reducing the number of needed SKUs, thanks to wide operating windows, and it provides a robust, efficient, and all-round solution for connected street and area lighting, thanks to the D4i standardized interface. Special features as low inrush current, extra ESD protections and high surge protection on DALI port, makes the product extremely robust for harsh outdoor conditions. Furthermore, thanks to the LSI digital port, it can be combined with stand alone sensors to manage luminaires lumen output based on people and vehicle presence. Also available with 2 channels for DT6 and DT8 tunable white applications.

Accessories



OT DX SD BOX

- Adds the StepDIM functionality to the Outdoor DEXAL LED driver range
- High surge protection: up to 10 kV (in protection class I or II)

Nominal Output Power (W)	Product Name	Programmable Output Current (mA)	Min Dimming Output Current (mA)	Output Voltage (Vdc)	Eff.@ 230Vac	Dimensions (L×W×H)(mm)
24	OT DX24/170-240/0A7 DIMA NFC G2 CE	150 ~ 700	35	12 ~ 48	89%	133 x 77 x 40
40	OT DX40/170-240/1A0 DIMA NFC G2 CE	150 ~ 1050	35	15 ~ 65	90%	133 x 77 x 40
75	OT DX75/170-240/1A0 DIMA NFC G2 CE	150 ~ 1050	35	35 ~ 150	93%	150 x 90 x 40
110	OT DX110/170-240/1A0 DIMA NFC G2 CE	150 ~ 1050	35	65 ~ 230	93%	150 x 90 x 40
165	OT DX165/170-240/1A0 DIMA NFC G2 CE	150 ~ 1050	35	130 ~ 260	94%	150 x 90 x 40
200	OT DX200/170-240/1A0 DIMA NFC G2 CE	150 ~ 1050	35	140 ~ 300	94%	170 x 100 x 40

Nominal Output Power (W)	Product Name	Programmable Output Current (mA)	Min Dimming Output Current (mA)	Output Voltage (Vdc)	Eff.@ 230Vac	Dimensions (L×W×H)(mm)
40	OT DX 40/170-240/1A0/2C NFC E TW	150 ~ 1050	25	15 ~ 65	89%	150 x 90 x 40
75	OT DX 75/170-240/1A0/2C NFC E TW	150 ~ 1050	25	35 ~ 118	92%	150 x 90 x 40



Advantages

- High efficiency up to 93%
- Input Voltage Range: 170 ~ 264Vac
- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with NFC
- Support DALI programming and NFC programming
- AstroDIM for autonomous dimming with five independent levels (Astro time mode)
- Dim-to-Off with Standby Power ≤ 0.5 W
- Always-on Auxiliary Power: 24Vdc, 125mA,3W (Transient Peak Power up to 6W)
- Integrated Power Monitoring with Accuracy up to±5%
- Constant Light Output
- End-of-Life Indicator
- Input Surge Protection: DM 6kV, CM 10kV
- Dali Protection for programming cable (up to 15m)
- All-Around Protection: OVP, SCP, OTP, OLP, NLP, OPP
- IP20 Design and Suitable for Outdoor Applications in Luminaires with IP>54
- Suitable for Luminaries with Protection Class I and II
- Complies with Zhaga Interface Specification Book 13
- Full compatibility with Tuner4TRONIC and T4T Field APP

Dimming Functions

- DALI-2/D4i / Timer Dimmable
- Adjustable Dimming Curve

Safety Certifications



About ICUTRONIC DEXAL

The ICUTRONIC DEXAL series is a constant-current, programmable and IP20 built-in LED driver, that operates from 176 ~ 264Vac input voltage with excellent efficiency and power factor. It helps in reducing the number of needed SKUs, thanks to wide operating windows, and it provides a robust, efficient, and all-round solution for connected street and area lighting, thanks to the D4i standardized interface.

Output Power (W)	Product Name	Programmable Output Current (mA)	Min Dimming Output Current (mA)	Output Voltage (Vdc)	Eff.@ 230Vac	Dimensions (L×W×H)(mm)
24	IT DX 24/220-240/1A0 NFC E	200 ~ 1050	50	12 ~ 48	89%	123 x 79 x 33
40	IT DX 40/220-240/1A0 NFC E	200 ~ 1050	50	20 ~ 77	90%	123.3 x 79.7 x 33.4
75	IT DX 75/220-240/1A0 NFC E	200 ~ 1050	50	35 ~ 150	92%	133 x 77 x 37
110	IT DX 110/220-240/1A0 NFC E	200 ~ 1050	50	65 ~ 230	93%	150 x 90 x 39.5
165	IT DX 165/220-240/1A0 NFC E	200 ~ 1050	50	90 ~ 260	93%	150 x 90 x 40
200	IT DX 200/220-240/1A0 NFC E	200 ~ 1050	50	140 ~ 300	93%	150 x 90 x 40



Advantages

- Supply voltage: 220 ~ 240 V
- AstroDim functionality
- Constant Lumen Output (CLO)
- Available with different wattage: 20 W, 40 W, 75 W
- Output current range 350 ~ 1050 mA
- DALI-2 certified (Part 251, 252, 253)
- DALI dimming (min.10%)
- Versatile DALI driver due to flexible output characteristic
- High surge protection: up to 10 kV (single pulse or more)
- Long lasting and high reliability
- Fully programmable via T4T software (DALI / AstroDIM / Constant Lumen)
- Great flexibility due to wide operating temperature range of up to -40 ~ 60 °C
- Lifetime: up to 100,000 h (depending on Tc temperature, max. 10 % failure rate)

Dimming Functions

- AstroDIM (Timer), DALI

Safety Certifications



About IT DALI E

The compact Icutronic DALI series is available in 20W, 40W, and 75W versions. Thanks to its small form factor, the series offers a smart balance of functionality and performance. It features AstroDIM and DALI-2 interface, including DALI Data (Parts 251, 252, 253). Please note that NTC, LEDset and NFC are not included.

Output Power (W)	Product Name	Adjustable Current Range (mA)	Min Dimming Output Current (mA)	Output Voltage (Vdc)	Eff.@ 220Vac	Dimensions (L×W×H)(mm)
20	IT DALI 20/220-240/1A0 E	200 ~ 1050	70	15 ~ 29	88%	103 x 67 x 30
40	IT DALI 40/220-240/1A0 E	200 ~ 1050	70	29 ~ 57	90%	103 x 67 x 30
75	IT DALI 75/220-240/1A0 E	200 ~ 1050	70	55 ~ 107	92%	123 x 79 x 67



Advantages

- High Efficiency (Up to 94.0%)
- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with NFC
- Input Voltage Range: 176 ~ 305Vac
- Output Lumen Compensation
- End-of-Life Indicator
- Long Lifetime Over 100K Hours at 75°C Case Temperature
- Input Surge Protection: DM 6kV, CM 10kV
- IP20 Design and Suitable for Outdoor Applications in Luminaires with IP>54
- Suitable for Luminaires with Protection Class I and II
- Complies with Zhaga Interface Specification Book 13
- 8-Year Warranty

Dimming Functions

- Isolated 1-10V / 3-Timer-Modes Dimmable (DT2 Models)
- DALI-2 / AC Dim / 3-Timer-Modes (BT2 Models)
- Dim-to-Off with Standby Power ≤ 0.5 W (BT2 Models)

Safety Certifications



SAA

EBS-BT2 Version Features

- DALI-2 and D4i Certified
- Always-on Auxiliary Power: 24Vdc, 125mA, 3W (Transient Peak Power up to 10W)
- Integrated 16Vdc Bus Power Supply Based on DALI-2
- Integrated Power Monitoring with High Accuracy up to ±1%
- Thermal Sensing and Protection for LED Module
- All-Around Protection: IUVP, IOVP, OVP, SCP, OTP

EBS-DT2 Version Features

- All-Around Protection: OVP, SCP, OTP

Accessories



END-CAP02
Cable Clamp for Independent Applications

About EBS

EBS-BT2

The EBS-BT2 family comprises DALI-2 D4i LED drivers designed to provide OEMs with crucial driver information, reduced maintenance and product expenses, and simplified installation processes. These drivers include Inventronics Controls-Ready features such as Dim-to-Off and Always-On Auxiliary Power, enabling seamless integration with various lighting control networks. They are compatible with Class I and II luminaires, built-in use, and have a Zhaga compatible form factor. Operating within a voltage range of 176-305Vac, they supply streamlined production with time-saving wireless programming and offer a wide output current range. Additionally, these drivers include AC power monitoring, built-in surge protection, and output lumen compensation for enhanced functionality.

EBS-DT2

The EBS DT2 family represents the next generation of Class I/II drivers, offering a simplified yet highly flexible solution. These drivers feature convenient push terminals, wireless programming via Near Field Communication (NFC), and multiple dimming options. Their streamlined design facilitates easier installation, leading to a reduction in production time and lower installation costs. Additionally, they ensure reliability and quality performance with built-in surge protection, output lumen compensation, and an end-of-life indicator. Designed to meet the Zhaga Interface Book 13 edition 2, the EBS-DT2 drivers can seamlessly integrate into more compact and slim European luminaires.

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 220Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
25	EBS-025S045BT2	300 ~ 450	28 ~ 84	88.5%	120,000 Tc=75°C	133 x 77 x 33
	EBS-025S070BT2	450 ~ 700	18 ~ 56	88.5%		
	EBS-025S105BT2	700 ~ 1050	12 ~ 36	87.0%		
	EBS-025S045DT2	300 ~ 450	28 ~ 84	88.5%	109,000 Tc=75°C	133 x 77 x 33
	EBS-025S070DT2	450 ~ 700	18 ~ 56	88.0%		
40	EBS-025S105DT2	700 ~ 1050	12 ~ 36	87.5%	110,000 Tc= 75°C	133 x 77 x 33
	EBS-040S045BT2	300 ~ 450	44 ~ 133	90.5%		
	EBS-040S070BT2	450 ~ 700	28 ~ 89	90.5%		
	EBS-040S105BT2	700 ~ 1050	19 ~ 57	89.5%	104,000 Tc= 75°C	133 x 77 x 33
	EBS-040S045DT2	300 ~ 450	44 ~ 133	90.5%		
	EBS-040S070DT2	450 ~ 700	28 ~ 89	89.0%		
80	EBS-040S105DT2	700 ~ 1050	19 ~ 57	89.5%	100,000 Tc= 75°C	133 x 77 x 36
	EBS-080S070BT2	450 ~ 700	57 ~ 178	92.5%		
	EBS-080S105BT2	700 ~ 1050	38 ~ 114	92.5%		
	EBS-080S150BT2	1050 ~ 1500	27 ~ 76	92.0%	120,000 Tc= 75°C	133 x 77 x 36
	EBS-080S070DT2	450 ~ 700	57 ~ 178	92.5%		
	EBS-080S105DT2	700 ~ 1050	38 ~ 114	92.5%		
120	EBS-080S150DT2	1050 ~ 1500	27 ~ 76	91.5%	120,000 Tc=75°C	150 x 85 x 39
	EBS-120S070BT2	450 ~ 700	86 ~ 266	93.5%		
	EBS-120S105BT2	700 ~ 1050	57 ~ 171	93.0%		
	EBS-120S150BT2	1050 ~ 1500	40 ~ 114	93.0%	100,000 Tc=75°C	150 x 85 x 39
	EBS-120S070DT2	450 ~ 700	86 ~ 266	93.0%		
	EBS-120S105DT2	700 ~ 1050	57 ~ 171	93.0%		
165	EBS-120S150DT2	1050 ~ 1500	40 ~ 114	92.5%	120,000 Tc=75°C	170 x 100 x 40
	EBS-165S070BT2	450 ~ 700	118 ~ 367	94.0%		
	EBS-165S105BT2	700 ~ 1050	79 ~ 236	94.0%		
	EBS-165S150BT2	1050 ~ 1500	55 ~ 157	93.5%	115,000 Tc=75°C	170 x 100 x 40
	EBS-165S070DT2	450 ~ 700	118 ~ 367	94.0%		
	EBS-165S105DT2	700 ~ 1050	79 ~ 236	94.0%		
	EBS-165S150DT2	1050 ~ 1500	55 ~ 157	94.0%		



Advantages

- 4DIM functionalits in one device: StepDIM, AstroDIM, MainsDIM, DALI
- Input Voltage Range: 176 ~ 264Vac
- 1DIM functionality: AstroDIM
- DALI-2 certified incl. Parts 251, 252, 253
- Easy and fast wireless luminaire programming
- Very high efficiency up to 94%
- High surge protection: up to 10 kV (in protection class I or II)
- Great flexibility due to wide operating temperature range of up to -40 ~ 60 °C
- High surge DALI protection: 1 kV
- Protection through double isolation between mains input and LED output
- Optimized NFC for programming from the top: easy accessibility in luminairesConstant Light Output
- End-of-Life Indicator
- Input Surge Protection: DM 6kV, CM 10kV
- All-Around Protection: OVP, SCP, OTP, OLP, NLP, OPP
- IP20 Design and Suitable for Outdoor Applications in Luminaires with IP>54
- Suitable for Luminaries with Protection Class I and II
- Complies with Zhaga Interface Specification Book 13
- Full compatibility with Tuner4TRONIC and T4T Field APP

Dimming Functions

- 4DIM: StepDIM, AstroDIM (Timer), MainsDIM, DALI
- 1DIM: AstroDIM (Timer)

Safety Certifications



About OPTOTRONIC 4DIM/1DIM

The Optotronic 4DIM/1DIM G3 series is a constant-current, programmable and IP20 built-in LED driver, that operates from 176 ~ 264Vac input voltage with excellent efficiency and power factor. It helps to optimize luminaire performances thanks to multiple operating windows, and it provides a robust, efficient, and all-round solution for connected street and area lighting (OT 4DIM with DALI-2) or for basic luminaires with only autonomous dimming requirements (OT 1DIM with AstroDIM)

Output Power (W)	Dimming Interface	Product Name	Programmable Output Current (mA)	Min Dimming Output Current (mA)	Output Voltage (Vdc)	Eff. @ 230Vac	Dimensions (L×W×H)(mm)
22	StepDIM, AstroDIM, MainsDIM, DALI	OT 20/170-240/1A0 4DIM NFC G3CE	150 ~ 1050	70	10 ~ 38	87.0%	123 x 79 x 33
40	StepDIM, AstroDIM, MainsDIM, DALI	OT 40/170-240/0A7 4DIM NFC G3CE	150 ~ 700	70	30 ~ 77	90.0%	123 x 79 x 33
40	StepDIM, AstroDIM, MainsDIM, DALI	OT 40/170-240/1A0 4DIM NFC G3CE	150 ~ 1050	70	15 ~ 56	90.0%	123 x 79 x 33
75	StepDIM, AstroDIM, MainsDIM, DALI	OT 75/170-240/0A7 4DIM NFC G3CE	150 ~ 700	70	50 ~ 150	93.0%	123 x 79 x 33
75	StepDIM, AstroDIM, MainsDIM, DALI	OT 75/170-240/1A0 4DIM NFC G3CE	150 ~ 1050	70	35 ~ 115	93.0%	123 x 79 x 33
75	StepDIM, AstroDIM, MainsDIM, DALI	OT 75/170-240/1A5 4DIM NFC G3CE	350 ~ 1500	70	25 ~ 75	93.0%	133 x 77 x 40
110	StepDIM, AstroDIM, MainsDIM, DALI	OT 110/170-240/1A0 4DIM NFCG3CE	150 ~ 1050	70	55 ~ 157	93.0%	133 x 77 x 40
110	StepDIM, AstroDIM, MainsDIM, DALI	OT 110/170-240/0A7 4DIM NFCG3CE	150 ~ 700	70	80 ~ 220	93.0%	133 x 77 x 40
165	StepDIM, AstroDIM, MainsDIM, DALI	OT 165/170-240/1A0 4DIM NFCG3CE	150 ~ 1050	70	90 ~ 260	94.0%	150 x 90 x 40
200	StepDIM, AstroDIM, MainsDIM, DALI	OT 200/170-240/1A0 4DIM NFCG3CE	150 ~ 1050	70	140 ~ 300	94.0%	170 x 100 x 40

Output Power (W)	Dimming Interface	Product Name	Programmable Output Current (mA)	Min Dimming Output Current (mA)	Output Voltage (Vdc)	Eff. @ 230Vac	Dimensions (L×W×H)(mm)
22	AstroDIM	OT 20/170-240/1A0 1DIM NFC G3	150 ~ 1050	70	10 ~ 38	87.0%	123 x 79 x 33
40	AstroDIM	OT 40/170-240/0A7 1DIM NFC G3	150 ~ 700	70	30 ~ 77	90.0%	123 x 79 x 33
40	AstroDIM	OT 40/170-240/1A0 1DIM NFC G3	150 ~ 1050	70	15 ~ 56	90.0%	123 x 79 x 33
75	AstroDIM	OT 75/170-240/0A7 1DIM NFC G3	150 ~ 700	70	50 ~ 150	93.0%	123 x 79 x 33
75	AstroDIM	OT 75/170-240/1A0 1DIM NFC G3	150 ~ 1050	70	35 ~ 115	93.0%	123 x 79 x 33
110	AstroDIM	OT 110/170-240/0A7 1DIM NFC G3	150 ~ 700	70	55 ~ 157	93.0%	133 x 77 x 40
110	AstroDIM	OT 110/170-240/1A0 1DIM NFC G3	150 ~ 1050	70	80 ~ 220	93.0%	133 x 77 x 40
165	AstroDIM	OT 165/170-240/1A0 1DIM NFC G3	150 ~ 1050	70	90 ~ 260	94.0%	150 x 90 x 40

Output Power (W)	Product Name	Adjustable Current Range (mA)	Min Dimming Output Current (mA)	Output Voltage (Vdc)	Eff. @ 220Vac	Dimensions (L×W×H)(mm)
15	OT 15/120-240/0A7 1DIM NFC CE	150 ~ 700	70	12 ~ 45	86.0%	103 x 30 x 67
30	OT 30/120-240/0A7 1DIM NFC CE	150 ~ 700	70	18 ~ 57	89.0%	103 x 30 x 67
60	OT 60/120-240/1A0 1DIM NFC CE	150 ~ 1050	70	28 ~ 86	91.0%	103 x 30 x 67



Advantages

- High Efficiency (Up to 96.5%)
- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with Programmability
- Input Voltage Range: 90 ~ 305Vac(EUM-Mx) 249-528Vac(ESM-Mx)
- Always-on Auxiliary Power: 12Vdc, 250mA, 3W (Transient Peak Power up to 10W)
- Output Lumen Compensation
- End-of-Life Indicator
- Input Surge Protection: DM 6kV, CM 10kV
- All-Around Protection: IUVP, IOVP, OVP, SCP, OTP
- IP66 / IP67 and UL Dry / Damp / Wet Location
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- 5-Year Warranty

Dimming Functions

- Isolated 0-10V / PWM / 3-Timer-Modes Dimmable
- INV Digital Dimming, UART Based Communication Protocol
- Dim-to-Off with Standby Power

Safety Certifications



About EUM-Mx

The EUM-Mx series offers full power at a wide output current range and supply Controls-Ready features such as Dim-to-Off and an Always-On Auxiliary Power of 12Vdc, 250mA with a transient peak up to 10W to better power occupancy and day-light sensors. This provides a cost-optimized solution by removing the need for additional power packs and AC Relays. They offer a reliable performance with a high level of built-in surge protection and added Input Over Voltage (IOV) and Input Under Voltage (IUV) protection to help against poor power quality supplies to the LED driver. The MG series provides a global cable to reduce inventory SKUs, the MT Series are UL Class P recognized and the MB series are BIS certified to offer a solution for a wide range of applications and regions.

About ESM-Mx

The ESM-Mx family are high input voltage Controls-Ready drivers offering OEMs a cost-optimized solution. They provide design flexibility with full power at a wide output current range. Their Controls-Ready features such as Dim-to-Off and an Always-On Auxiliary Power of 12Vdc, 250mA with a transient peak up to 10W to better power occupancy and daylight sensors. The ESM-Mx operates on a vast array of lighting control networks via a 0-10V dimming input. These IP66/IP67 drivers have industry-leading built-in surge protection and longer lifetimes for harsh environmental applications. They provide the added convenience of UL Class P (MT series) and models with a global cable to reduce inventory SKUs (MG series).

EUM-Mx

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff. @ 220Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
75	EUM-075S105Mx①	700 ~ 1050	36 ~ 107	90.5%	101,000 Tc= 70°C	142(125) × 67.5 × 36.5
	EUM-075S150Mx	1050 ~ 1500	25 ~ 72	89.5%		
	EUM-075S210Mx ★	1400 ~ 2100	18 ~ 54	89.0%		
100	EUM-100S105Mx	700 ~ 1050	48 ~ 143	92.5%	112,000 Tc= 70°C	148(131) × 67.5 × 36.5
	EUM-100S150Mx	1050 ~ 1500	34 ~ 95	92.5%		
	EUM-100S280Mx ★	1750 ~ 2800	17 ~ 54	91.0%		
150	EUM-150S105Mx	700 ~ 1050	72 ~ 214	93.5%	104,000 Tc= 70°C	178(161) × 67.5 × 36.5
	EUM-150S150Mx	1050 ~ 1500	50 ~ 143	93.0%		
	EUM-150S210Mx	1400 ~ 2100	36 ~ 107	92.5%		
	EUM-150S420Mx	2800 ~ 4200	18 ~ 54	91.5%		
200	EUM-200S105Mx	700 ~ 1050	95 ~ 286	93.5%	102,000 Tc= 70°C	188(171) × 67.5 × 36.5
	EUM-200S150Mx	1050 ~ 1500	67 ~ 190	93.5%		
	EUM-200S280Mx	1800 ~ 2800	36 ~ 111	93.0%		
	EUM-200S560Mx	3500 ~ 5600	18 ~ 57	92.0%		
240	EUM-240S105Mx	700 ~1050	115 ~ 343	94.0%	101,000 Tc= 70°C	218(201) × 67.5 × 38.5
	EUM-240S150Mx	1050 ~ 1500	80 ~ 229	93.5%		
	EUM-240S350Mx	2150 ~ 3500	35 ~ 111	93.0%		
	EUM-240S670Mx	4200 ~ 6700	18 ~ 57	92.5%		
320	EUM-320S105Mx	700 ~1050	153 ~ 457	94.5%	112,000 Tc= 70°C	243(224) × 80 × 44.5
	EUM-320S150Mx	1050 ~ 1500	107 ~ 305	94.0%		
	EUM-320S250Mx	1750 ~ 2500	64 ~183	94.0%		
	EUM-320S500Mx	2850 ~ 5000	32 ~ 112	93.5%		
400	EUM-320S760Mx	5350 ~ 7600	21 ~ 60	92.5%	113,000 Tc=70°C	262(243) × 90 × 43.5
	EUM-400S150Mx	1050 ~ 1500	133 ~ 381	94.5%		
	EUM-400S910Mx	7150 ~ 9100	24 ~ 56	94.0%		
480	EUM-480S140Mx	1050 ~ 1400	171 ~ 457	94.5%	102,000 Tc=70°C	262(243) × 90 × 43.5
	EUM-480S280Mx	2100 ~ 2800	86 ~ 228	94.0%		
	EUM-480S420Mx	3150 ~ 4200	57 ~ 152	94.0%		
	EUM-480S560Mx	4350 ~ 5600	43 ~ 110	94.0%		
	EUM-480S10AMx	8600 ~ 10000	24 ~ 56	94.0%		
680	EUM-680S170Mx	1250 ~ 1700	200 ~ 544	95.5%	107,000 Tc=70°C	275(250)×135 x 46
	EUM-680S240Mx	1800 ~ 2400	141.5 ~ 378	94.5%		
	EUM-680S350Mx	2600 ~ 3500	97.1 ~ 262	95.0%		
	EUM-680S560Mx	4200 ~ 5600	60.7 ~ 163	94.5%		
	EUM-680S840Mx	6300 ~ 8400	40.4 ~ 108	95.0%		
	EUM-680S15AMx	12600 ~ 15000	22.6 ~ 54	95.5%		
880	EUM-880S280Mx	1950 ~ 2800	157 ~ 452	95.0%	105,000 Tc= 70°C	275(250)×144 x 48.5
	EUM-880S420Mx	3000 ~ 4200	104 ~ 294	95.5%		
	EUM-880S700Mx	4900 ~ 7000	63 ~ 180	96.0%		
	EUM-880S11AMx	8000 ~ 11500	38 ~ 110	95.5%		
	EUM-880S20AMx	16300 ~ 20000	22 ~ 54	95.5%		

★ : Class 2 Model

① : x=G are UL Recognized, ENEC and CCC, etc. models; x=T are UL Class P models.

ESM-Mx

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff. @ 480Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
150	ESM-150S105Mx ^①	700 ~ 1050	72 ~ 214	93.5%	100,000 Tc=70°C	178(161)× 76.5× 38.5
	ESM-150S150Mx	1050 ~ 1500	50 ~ 143	93.0%		
	ESM-150S210Mx	1400 ~ 2100	36 ~ 107	92.5%		
	ESM-150S420Mx	2800 ~ 4200	18 ~ 54	92.0%		
240	ESM-240S105Mx	700 ~ 1050	115 ~ 343	94.0%	106,000 Tc= 70°C	218(201) × 76.5 × 38.5
	ESM-240S150Mx	1050 ~ 1500	80 ~ 229	93.5%		
	ESM-240S350Mx	2150 ~ 3500	35 ~ 111	93.0%		
	ESM-240S670Mx	4200 ~ 6700	18 ~ 57	92.5%		
320	ESM-320S105Mx	700 ~ 1050	153 ~ 457	95.0%	105,000 Tc= 70°C	243(224) × 85 × 44.5
	ESM-320S150Mx	1050 ~ 1500	107 ~ 305	94.5%		
	ESM-320S250Mx	1750 ~ 2500	64 ~ 183	94.5%		
	ESM-320S500Mx	2850 ~ 5000	32 ~ 112	94.0%		
	ESM-320S760Mx	5350 ~ 7600	21 ~ 60	94.0%		
480	ESM-480S140Mx	1050 ~ 1400	171 ~ 457	95.5%	100,000 Tc=70°C	262(243) × 90 × 43.5
	ESM-480S280Mx	2100 ~ 2800	86 ~ 228	95.5%		
	ESM-480S420Mx	3150 ~ 4200	57 ~ 152	95.0%		
	ESM-480S560Mx	4350 ~ 5600	43 ~ 110	95.0%		
	ESM-480S10AMx	8600 ~ 10000	24 ~ 56	95.0%		
680	ESM-680S170Mx/MGS	1250 ~ 1700	200 ~ 544	96.0%	102,000 Tc= 70°C	Mx: 275(250) ×135 x 46 MGS: 300(275) x 151 x 46
	ESM-680S240Mx/MGS	1800 ~ 2400	141.5 ~ 378	95.5%		
	ESM-680S350Mx/MGS	2600 ~ 3500	97.1 ~ 262	95.5%		
	ESM-680S560Mx/MGS	4200 ~ 5600	60.7 ~ 163	95.5%		
	ESM-680S840Mx/MGS	6300 ~ 8400	40.4 ~ 108	95.5%		
	ESM-680S15AMx/MGS	12600 ~ 15000	22.6 ~ 54	94.5%		
880	ESM-880S280Mx/MGS	1950 ~ 2800	157 ~ 452	96.0%	100,000 Tc= 70°C	Mx: 275(250)×x144 x 48.5 MGS: 300(275) x 160 x 48.5
	ESM-880S420Mx/MGS	3000 ~ 4200	104 ~ 294	95.5%		
	ESM-880S700Mx/MGS	4900 ~ 7000	63 ~ 180	96.0%		
	ESM-880S11AMx/MGS	8000 ~ 11500	38 ~ 110	95.0%		
	ESM-880S20AMx/MGS	16300 ~ 20000	22 ~ 54	95.5%		
1200	ESM-1K2S350Mx/MGS	2600 ~ 3500	171 ~ 462	96.5%	101,000 Tc= 70°C	Mx: 310(285) × 141 × 48.5 MGS: 330(305) x 166.5 x 49.5
	ESM-1K2S525Mx/MGS	3950 ~ 5250	114 ~ 304	96.0%		
	ESM-1K2S740Mx/MGS	5550 ~ 7400	81 ~ 217	96.5%		

① : x=G are UL Recognized, ENEC and CCC, etc. models; x=T are UL Class P models.



Advantages

- High Efficiency (Up to 96%)
- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with NFC
- Input Voltage Range: 90 ~ 305Vac(EUM-Bx) 249-528Vac(ESM-Bx)
- Integrated Power Metering with High Accuracy up to ±1%
- Output Lumen Compensation
- End-of-Life Indicator
- Thermal Sensing and Protection for LED Module
- Surge Protection: CM 6kV, DM10kV
- IP66 / IP67 and UL Dry / Damp / Wet Location
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- 7 Years Warranty

Dimming Functions

- DALI-2 and D4i Certified
- 3-Timer-Modes Dimmable
- Dim-to-Off with Low Standby Power

Safety Certifications



global-mark

About EUM-Bx

The EUM-Bx series is DALI-2 D4i certified, allowing for extensive health diagnostics tracking for the LED driver, seamless plug-and-play controls, and standardization of intra-luminaire designs. They are extremely flexible with wireless programmability via Near Field Communication (NFC) to help OEMs streamline production and simplify installation. The EUM-Bx series is Controls-Ready with Dim-to-Off and Always-On Auxiliary Power of 24Vdc, 125mA with a transient peak up to 10W. They also provide the added convenience of integrated power monitoring allowing users to measure energy consumption. The BG series provides a global cable to reduce inventory SKUs, the BT Series are UL Class P recognized, and the BB series are BIS certified to offer a solution for a wide range of applications and regions.Available also as DALI-2 in Class I and Class II (EUM-Ex and EUM-EE)

About ESM-Bx

The ESM-Bx series is DALI-2 D4i certified which allows the tracking and monitoring of health diagnostics for LED drivers, provides plug-and-play controls, and standardizes intra-luminaire designs. They are extremely flexible with wireless programmability via Near Field Communication (NFC) to help OEMs streamline production and simplify installation. The ESM-Bx series is Controls-Ready with Dim-to-Off and Always-On Auxiliary Power of 24Vdc, 125mA with a transient peak up to 10W. They also provide the added convenience of integrated power monitoring allowing users to measure energy consumption. The BG models utilize globally accepted cables that help reduce SKUs, the BT models provide UL Class P certification.

EUM-Bx

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 220Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
75	EUM-075S105Bx①	700 ~ 1050	36 ~ 107	90.5%	101,000 Tc= 70°C	142(125) × 67.5 × 36.5
	EUM-075S150Bx	1050 ~ 1500	25 ~ 72	89.5%		
	EUM-075S210Bx ★	1400 ~ 2100	18 ~ 54	89.0%		
100	EUM-100S105Bx	700 ~ 1050	48 ~ 143	92.5%	112,000 Tc= 70°C	148(131) × 67.5 × 36.5
	EUM-100S150Bx	1050 ~ 1500	34 ~ 95	92.5%		
	EUM-100S280Bx ★	1750 ~ 2800	17 ~ 54	91.0%		
150	EUM-150S105Bx	700 ~ 1050	72 ~ 214	93.5%	104,000 Tc= 70°C	178(161) × 67.5 × 36.5
	EUM-150S150Bx	1050 ~ 1500	50 ~ 143	93.0%		
	EUM-150S210Bx	1400 ~ 2100	36 ~ 107	92.5%		
	EUM-150S420Bx	2800 ~ 4200	18 ~ 54	91.5%		
200	EUM-200S105Bx	700 ~ 1050	95 ~ 286	93.5%	102,000 Tc= 70°C	188(171) × 67.5 × 36.5
	EUM-200S150Bx	1050 ~ 1500	67 ~ 190	93.5%		
	EUM-200S280Bx	1800 ~ 2800	36 ~ 111	93.0%		
	EUM-200S560Bx	3500 ~ 5600	18 ~ 57	92.0%		
240	EUM-240S105Bx	700 ~ 1050	115 ~ 343	94.0%	101,000 Tc= 70°C	218(201) × 67.5 × 38.5
	EUM-240S150Bx	1050 ~ 1500	80 ~ 229	93.5%		
	EUM-240S350Bx	2150 ~ 3500	35 ~ 111	93.0%		
	EUM-240S670Bx	4200 ~ 6700	18 ~ 57	92.5%		
320	EUM-320S105Bx	700 ~ 1050	153 ~ 457	94.5%	112,000 Tc=70°C	243(224) × 80 × 44.5
	EUM-320S150Bx	1050 ~ 1500	107 ~ 305	94.0%		
	EUM-320S250Bx	1750 ~ 2500	64 ~ 183	94.0%		
	EUM-320S500Bx	2850 ~ 5000	32 ~ 112	93.5%		
	EUM-320S760Bx	5350 ~ 7600	21 ~ 60	92.5%		
480	EUM-480S140BG	1050 ~ 1400	171 ~ 457	95.0%	110,000 Tc=70°C	262(243) × 90 × 43.5
	EUM-480S280BG	2100 ~ 2800	86 ~ 228	95.0%		
	EUM-480S420BG	3150 ~ 4200	57 ~ 152	94.0%		
	EUM-480S560BG	4350 ~ 5600	43 ~ 110	94.0%		
	EUM-480S10ABG	8600 ~ 10000	24 ~ 56	94.0%		
680	EUM-680S170BG	1250 ~ 1700	200 ~ 544	95.5%	107,000 Tc=70°C	275(250) × 135 × 46
	EUM-680S240BG	1800 ~ 2400	141.5 ~ 378	94.5%		
	EUM-680S350BG	2600 ~ 3500	97.1 ~ 262	95.0%		
	EUM-680S560BG	4200 ~ 5600	60.7 ~ 163	94.5%		
	EUM-680S840BG	6300 ~ 8400	40.4 ~ 108	95.0%		
	EUM-680S15ABG	12600 ~ 15000	22.6 ~ 54	95.5%		

★ : Class 2 Model

① : x=G are UL Recognized, ENEC and CCC, etc. models; x=T are UL Class P models; x=B are BIS models.

ESM-Bx

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 480Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
100	ESM-100S105Bx①	700 ~ 1050	48 ~ 143	92.0%	100,000 Tc=70°C	148(131) × 76.5 × 38.5
	ESM-100S150Bx	1050 ~ 1500	34 ~ 95	91.5%		
	ESM-100S280Bx	1750 ~ 2800	17 ~ 54	90.5%		
150	ESM-150S105Bx	700 ~ 1050	72 ~ 214	93.0%	100,000 Tc=70°C	178(161) × 76.5 × 38.5
	ESM-150S150Bx	1050 ~ 1500	50 ~ 143	93.0%		
	ESM-150S210Bx	1400 ~ 2100	36 ~ 107	92.5%		
	ESM-150S420Bx	2800 ~ 4200	18 ~ 54	92.0%		
240	ESM-240S105Bx	700 ~ 1050	115 ~ 343	94.0%	106,000 Tc=70°C	218(201) × 76.5 × 38.5
	ESM-240S150Bx	1050 ~ 1500	80 ~ 229	93.5%		
	ESM-240S350Bx	2150 ~ 3500	35 ~ 111	93.0%		
	ESM-240S670Bx	4200 ~ 6700	18 ~ 57	92.5%		
320	ESM-320S105Bx	700 ~ 1050	153 ~ 457	95.0%	105,000 Tc=70°C	243(224) × 85 × 44.5
	ESM-320S150Bx	1050 ~ 1500	107 ~ 305	94.5%		
	ESM-320S250Bx	1750 ~ 2500	64 ~ 183	94.5%		
	ESM-320S500Bx	2850 ~ 5000	32 ~ 112	94.0%		
	ESM-320S760Bx	5350 ~ 7600	21 ~ 60	94.0%		
480	ESM-480S140BG	1050 ~ 1400	171 ~ 457	95.0%	100,000 Tc=70°C	262(243) × 90 × 43.5
	ESM-480S280BG	2100 ~ 2800	86 ~ 228	94.0%		
	ESM-480S420BG	3150 ~ 4200	57 ~ 152	95.0%		
	ESM-480S560BG	4350 ~ 5600	43 ~ 110	94.5%		
	ESM-480S10ABG	8600 ~ 10000	24 ~ 56	94.5%		
680	ESM-680S170BG	1250 ~ 1700	200 ~ 544	96.0%	102,000 Tc=70°C	275(250) × 135× 46
	ESM-680S240BG	1800 ~ 2400	141.5 ~ 378	95.5%		
	ESM-680S350BG	2600 ~ 3500	97.1 ~ 262	95.5%		
	ESM-680S560BG	4200 ~ 5600	60.7 ~ 163	95.5%		
	ESM-680S840BG	6300 ~ 8400	40.4 ~ 108	95.5%		
	ESM-680S15ABG	12600 ~ 15000	22.6 ~ 54	94.5%		

① : x=G are UL Recognized, ENEC and CCC, etc. models; x=T are UL Class P models; x=B are BIS models.



Advantages

- High efficiency up to 94.5%
- Input Voltage Range: 90 ~ 305Vac
- AstroDIM for autonomous dimming with five independent levels (Astro time mode)
- Dim-to-Off with Standby Power ≤ 0.5 W
- Always-on Auxiliary Power: 12Vdc, 100mA(P/N) on specific versions
- Input Surge Protection: DM 6kV, CM 10kV
- Suitable for Luminaires with Protection Class I and II
- Override dimming
- IP66/IP67
- 5-Year Warranty

Dimming Functions

- Isolated 1(0)-10V/ PWM / Resistor/ Timer Dimmable
- Adjustable Dimming Curve
- Override dimming

Safety Certifications



About ICUTRONIC 0-10V

The IT 0-10 P67 series is constant-current, programmable and IP66/IP67 rated LED driver that operates from 90-305Vac input with excellent power factor. Providing a stable, efficient, and all-round solution for global street and area lighting.

Output Power (W)	Product Name	Full-Power Current Range (mA)	Min Dimming Output Current (mA)	Output Voltage (Vdc)	Eff. @ 220Vac	Dimensions (L×W×H)(mm)
30	IT 0-10 30/100-277/0A5 P67 x ①	300 ~ 500	30	30 ~ 100	88.0%	112(95) x 64 x 32
30	IT 0-10 30/100-277/0A5 P67 x A12	300 ~ 500	30	30 ~ 100	88.0%	112(95) x 64 x 32
30	IT 0-10 30/100-277/1A05 P67 x	550 ~ 1050	55	17 ~ 54	89.0%	112(95) x 64 x 32
30	IT 0-10 30/100-277/1A05 P67 x A12	550 ~ 1050	55	17 ~ 54	89.0%	112(95) x 64 x 32
50	IT 0-10 50/100-277/0A53 P67 x	300 ~ 530	30	47 ~ 167	90.5%	112(95) x 64 x 32
50	IT 0-10 50/100-277/0A53 P67 x A12	300 ~ 530	30	47 ~ 167	90.5%	112(95) x 64 x 32
50	IT 0-10 50/100-277/0A9 P67 x	550 ~ 900	55	28 ~ 91	91.5%	112(95) x 64 x 32
50	IT 0-10 50/100-277/0A9 P67 x A12	550 ~ 900	55	28 ~ 91	91.5%	112(95) x 64 x 32
50	IT 0-10 50/100-277/1A5 P67 x	920 ~ 1500	92	17 ~ 54	90.5%	112(95) x 64 x 32
50	IT 0-10 50/100-277/1A5 P67 x A12	920 ~ 1500	92	17 ~ 54	90.5%	112(95) x 64 x 32
75	IT 0-10 75/100-277/0A53 P67 x	300 ~ 530	30	70 ~ 250	92.0%	142(125) x 60 x 33.4
75	IT 0-10 75/100-277/0A53 P67 x A12	300 ~ 530	30	70 ~ 250	92.0%	142(125) x 60 x 33.4
75	IT 0-10 75/100-277/1A05 P67 x	700 ~ 1050	70	36 ~ 107	92.0%	142(125) x 60 x 33.4
75	IT 0-10 75/100-277/1A05 P67 x A12	700 ~ 1050	70	36 ~ 107	92.0%	142(125) x 60 x 33.4
75	IT 0-10 75/100-277/2A1 P67 x	1400 ~ 2100	140	17 ~ 54	90.5%	142(125) x 60 x 33.4
75	IT 0-10 75/100-277/2A1 P67 x A12	1400 ~ 2100	140	17 ~ 54	90.5%	142(125) x 60 x 33.4
100	IT 0-10 100/100-277/0A53 P67 x	350 ~ 530	35	94 ~ 286	92.0%	148(131) x 60 x 33.4
100	IT 0-10 100/100-277/0A53 P67 x A12	350 ~ 530	35	94 ~ 286	92.0%	148(131) x 60 x 33.4
100	IT 0-10 100/100-277/1A05 P67 x	700 ~ 1050	70	48 ~ 143	92.5%	148(131) x 60 x 33.4
100	IT 0-10 100/100-277/1A05 P67 x A12	700 ~ 1050	70	48 ~ 143	92.5%	148(131) x 60 x 33.4
100	IT 0-10 100/100-277/2A8 P67 x	1750 ~ 2800	175	17 ~ 54	92.0%	148(131) x 60 x 33.4
100	IT 0-10 100/100-277/2A8 P67 x A12	1750 ~ 2800	175	17 ~ 54	92.0%	148(131) x 60 x 33.4
150	IT 0-10 150/100-277/0A7 P67 x	530 ~ 700	53	107 ~ 284	94.5%	178(161) x 60 x 33.4
150	IT 0-10 150/100-277/0A7 P67 x A12	530 ~ 700	53	107 ~ 284	94.5%	178(161) x 60 x 33.4
150	IT 0-10 150/100-277/1A05 P67 x	700 ~ 1050	70	72 ~ 214	94.0%	178(161) x 60 x 33.4
150	IT 0-10 150/100-277/1A05 P67 x A12	700 ~ 1050	70	72 ~ 214	94.0%	178(161) x 60 x 33.4
150	IT 0-10 150/100-277/4A2 P67 x	2680 ~ 4200	268	18 ~ 56	92.5%	178(161) x 60 x 33.4
150	IT 0-10 150/100-277/4A2 P67 x A12	2680 ~ 4200	268	18 ~ 56	92.5%	178(161) x 60 x 33.4
200	IT 0-10 200/100-277/0A7 P67 x	530 ~ 700	53	142 ~ 378	94.0%	188(171) x 60 x 33.4
200	IT 0-10 200/100-277/0A7 P67 x A12	530 ~ 700	53	142 ~ 378	94.0%	188(171) x 60 x 33.4
200	IT 0-10 200/100-277/1A05 P67 x	700 ~ 1050	70	95 ~ 286	94.0%	188(171) x 60 x 33.4
200	IT 0-10 200/100-277/1A05 P67 x A12	700 ~ 1050	70	95 ~ 286	94.0%	188(171) x 60 x 33.4
200	IT 0-10 200/100-277/5A6 P67 x	3500 ~ 5600	350	18 ~ 57	94.0%	188(171) x 60 x 33.4
200	IT 0-10 200/100-277/5A6 P67 x A12	3500 ~ 5600	350	18 ~ 57	94.0%	188(171) x 60 x 33.4
240	IT 0-10 240/100-277/0A7 P67 x	530 ~ 700	53	171 ~ 453	94.5%	218(201) x 60 x 33.4
240	IT 0-10 240/100-277/0A7 P67 x A12	530 ~ 700	53	171 ~ 453	94.5%	218(201) x 60 x 33.4
240	IT 0-10 240/100-277/1A05 P67 x	700 ~ 1050	70	115 ~ 343	94.0%	218(201) x 60 x 33.4
240	IT 0-10 240/100-277/1A05 P67 x A12	700 ~ 1050	70	115 ~ 343	94.0%	218(201) x 60 x 33.4
240	IT 0-10 240/100-277/6A7 P67 x	4200 ~ 6700	420	18 ~ 57	94.0%	218(201) x 60 x 33.4
240	IT 0-10 240/100-277/6A7 P67 x A12	4200 ~ 6700	420	18 ~ 57	94.0%	218(201) x 60 x 33.4
320	IT 0-10 320/100-277/1A05 P67 x	700 ~ 1050	70	153 ~ 457	96.0%	234(217) x 60 x 37.6
320	IT 0-10 320/100-277/1A05 P67 x A12	700 ~ 1050	70	153 ~ 457	96.0%	234(217) x 60 x 37.6
320	IT 0-10 320/100-277/1A5 P67 x	1050 ~ 1500	105	107 ~ 305	95.5%	234(217) x 60 x 37.6
320	IT 0-10 320/100-277/1A5 P67 x A12	1050 ~ 1500	105	107 ~ 305	95.5%	234(217) x 60 x 37.6
320	IT 0-10 320/100-277/7A6 P67 x	5350 ~ 7600	535	21 ~ 60	94.5%	234(217) x 60 x 37.6
320	IT 0-10 320/100-277/7A6 P67 x A12	5350 ~ 7600	535	21 ~ 60	94.5%	234(217) x 60 x 37.6

① : x=U are Class P models,x=G are UL Recognized, ENEC and CCC,etc.models; x=B are BIS models;x=E are Class II models with ENEC,etc.



Advantages

- High Efficiency (Up to 94.0%)
- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with Programmability
- Input Voltage Range: 90 ~ 305Vac
- Compact Metal Case with Excellent Thermal Performance
- Output Lumen Compensation
- Input Surge Protection Up to: DM 6kV, CM 10kV
- All-Around Protection: OVP, SCP, OTP
- IP66 / IP67 and UL Dry / Damp / Wet Location
- SELV Output Models Available
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- 5-Year Warranty

Dimming Functions

- Isolated 1-5V / 1-10V / 10V PWM / 3-Timer-Modes

Safety Certifications



About EUM-Dx

Inventronics EUM-Dx series provides a next-generation platform offering an enhanced transformer design, optimized components that provide lower costs without sacrificing quality or performance and a new design methodology. They also utilize a new global cable suitable for worldwide use to help OEMs reduce inventory SKUs.Available also for Class II (EUM-DE)" Available also with additional protection for 440Vac (EAM-DB/SB) Available also for Input Voltage 249 ~ 528Vac and Class I (ESM-Dx)

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 220Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
30	EUM-030S050Dx①	300 ~ 500	30 ~ 100	88.0%	120,000 Tc= 70°C	112(95) × 64 × 36.5
	EUM-030S105Dx ★	550 ~ 1050	17 ~ 54	87.0%		
50	EUM-050S053Dx	300 ~ 530	47 ~ 167	90.5%	103,000 Tc= 70°C	112(95) × 64 × 36.5
	EUM-050S090Dx	550 ~ 900	28 ~ 91	89.0%		
	EUM-050S150Dx ★	920 ~ 1500	17 ~ 54	88.0%		
75	EUM-075S053Dx	300 ~ 530	70 ~ 250	92.0%	100,000 Tc= 70°C	142(125) × 60 × 36.5
	EUM-075S105Dx	700 ~ 1050	36 ~ 107	90.5%		
	EUM-075S150Dx	1050 ~ 1500	25 ~ 72	90.5%		
	EUM-075S210Dx ★	1400 ~ 2100	18 ~ 54	89.5%		
100	EUM-100S053Dx	350 ~ 530	94 ~ 286	94.0%	114,000 Tc= 70°C	148(131) × 60 × 36.5
	EUM-100S105Dx	700 ~ 1050	48 ~ 143	93.0%		
	EUM-100S150Dx	1050 ~ 1500	34 ~ 95	93.0%		
	EUM-100S280Dx ★	1750 ~ 2800	17 ~ 54	92.0%		
	EUM-150S070Dx	530 ~ 700	107 ~ 284	93.5%		
150	EUM-150S105Dx	700 ~ 1050	72 ~ 214	93.0%	106,000 Tc= 70°C	178(161) × 60 × 36.5
	EUM-150S150Dx	1050 ~ 1500	50 ~ 143	93.5%		
	EUM-150S210Dx	1400 ~ 2100	36 ~ 107	92.0%		
	EUM-150S420Dx	2800 ~ 4200	18 ~ 54	91.5%		
200	EUM-200S070Dx	530 ~ 700	142 ~ 378	94.0%	100,000 Tc= 70°C	188(171) × 60 × 36.5
	EUM-200S105Dx	700 ~ 1050	95 ~ 286	93.5%		
	EUM-200S150Dx	1050 ~ 1500	67 ~ 190	93.0%		
	EUM-200S280Dx	1800 ~ 2800	36 ~ 111	92.5%		
	EUM-200S560Dx	3500 ~ 5600	18 ~ 57	92.0%		
240	EUM-240S070Dx	530 ~ 700	171 ~ 453	94.0%	100,000 Tc= 70°C	218(201) × 60 × 38.5
	EUM-240S105Dx	700 ~ 1050	115 ~ 343	94.0%		
	EUM-240S150Dx	1050 ~ 1500	80 ~ 229	93.5%		
	EUM-240S350Dx	2150 ~ 3500	35 ~ 111	93.0%		
	EUM-240S670Dx	4200 ~ 6700	18 ~ 57	92.5%		
320	EUM-320S105Dx	700 ~ 1050	153 ~ 457	94.0%	111,000 Tc= 70°C	243(224) × 80 × 44.5
	EUM-320S150Dx	1050 ~ 1500	107 ~ 305	94.0%		
	EUM-320S250Dx	1750 ~ 2500	64 ~ 183	94.0%		
	EUM-320S500Dx	2850 ~ 5000	32 ~ 112	93.0%		
	EUM-320S760Dx	5350 ~ 7600	21 ~ 60	93.0%		

★ : Class 2 Model

① : x=G are UL Recognized, ENEC and CCC, etc. models; x=T are UL Class P models; x=B are BIS models. X=E are Class II models with ENEC; x=F are UL class P models with flying leads, etc.



Advantages

- High efficiency up to 90%
- Input Voltage Range: 90 ~ 305Vac
- SELV output (≤60V)
- Current adjustment by Potentiometer
- 1-10V dimming (10-100%)
- Long life time
- Input Surge Protection: DM 6kV, CM 6kV
- Suitable for Luminaires with Protection Class I and II
- IP42

Dimming Functions

- Isolated 1-10V

Safety Certifications



Output Power (W)	Product Name	Adjustable Current Range (mA)	Output Voltage Range (Vdc)	Eff. @ 220Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
30W	EM 30/100-277/0A7 DIM P	350 ~ 700	40 ~ 54	90%	1100,000 Tc=70°C	105 x 60.5 x 30.5
60W	EM 60/100-277/1A4 DIM P	700 ~ 1400	40 ~ 54	90%	100,000 Tc=70°C	105 x 60.5 x 30.5



Advantages

- Full Power at Wide Output Current Range (Constant Power)
- Input Voltage Range: 90 ~ 305Vac
- Adjustable Output Current (AOC) with Programmability
- Output Lumen Compensation
- End-of-Life Indicator
- Input Surge Protection: DM 6kV, CM 10kV
- All-Around Protection: OVP, SCP, OTP
- IP66 and UL Dry/Damp Location
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- 5 Years Warranty

Dimming Functions

- Isolated 1-8V/10V PWM/3-Timer-Modes Dimmable
- Adjustable Dimming Curve
- Override Dimming

Safety Certifications



Output Power (W)	Product Name	Adjustable Current Range(mA)	Output Voltage Range (Vdc)	Eff. @220Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
180	EUM-180S125DF	105 ~ 1250	67 ~ 190	93.0%	109,000 Tc=70°C	240.5(171) × 60 × 37.6



Advantages

- High efficiency up to 96%
- Input Voltage Range: 108 ~ 305Vac
- Fix output of 700mA
- Long life time
- Input Surge Protection: DM 6kV, CM 6kV
- Suitable for Luminaires with Protection Class I
- IP67

Dimming Functions

Not relevant

Safety Certifications



About EM P7 G2

The EM P7 G2 series is constant-current LED driver that operates from 108-305Vac and providing a stable, efficient solution for outdoor area lighting.

Output Power (W)	Product Name	Adjustable Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 220Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
100	EM 100/120-277/700 P7 G2	700	100 ~ 143	93.5%	50,000 Tc=75°C	143.5 x 56 x 33
150	EM 150/120-277/700 P7 G2	700	150 ~ 215	94.5%	50,000 Tc=75°C	143.5 x 56 x 33
200	EM 200/120-277/700 P7 G2	700	200 ~ 285	95.5%	50,000 Tc=75°C	150.5 x 56 x 33
240	EM 250/120-277/700 P7 G2	700	240 ~ 343	96.0%	50,000 Tc=75°C	150.5 x 56 x 33

PU-10Kx05KBxA



■ Features

- 90-305Vac Working Input Voltage
- Uoc=10kV & In=5kA
- Certified for both EN 61643-11 - T2 & T3
- Protection Mode for TN, TT and IT-Systems
- Available for Series & Parallel Installation
- Available for Class I & Class II luminaires
- Double Thermally Protected
- End-of-life LED Indicator
- High Temperature, 85°C Maximum Surface Temp
- Input Over Voltage Protection at 440Vac with 48 Hours
- IP66 / IP67

PU-20Kx10KTxx



■ Features

- Compatible with Inventronics LED Drivers
- 90-305Vac Working Input Voltage
- 15 kA Maximum, 10 kA Nominal (15 strikes) Surge Current Rating Using Industry Standard 8/20µs Wave
- UL1449 Type 4, EN 61643-11 – Surge Protective Devices T2 & T3
- IEEE C62.41.2 Location Category C High
- High Temperature, 85°C Maximum Ambient
- Flameproof Plastic Enclosure
- IP66

PU-20KS10KHT



■ Features

- Compatible with Inventronics LED Drivers
- 90-305Vac Working Input Voltage
- DM, CM Surge Protection Mode
- Maximum Discharge Current (Imax) 20kA, 8/20µs
- Nominal Discharge Current (In) 10kA, 8/20µs
- UL1449 Type 5 Recognized Component
- IEEE C62.41.2 Location Category C High Exposure
- High Temperature, 85°C Maximum Surface Temp Rating

PS-20KS10KHT



■ Features

- Compatible with Inventronics LED Drivers
- 249-528Vac Working Input Voltage
- DM, CM Surge Protection Mode
- Maximum Discharge Current (Imax) 20kA, 8/20µs
- Nominal Discharge Current (In) 10kA, 8/20µs
- UL1449 Type 5 Recognized Component
- IEEE C62.41.2 Location Category C High Exposure
- High Temperature, 85°C Maximum Surface Temp Rating

SPD G3



■ Features

- Mains Voltage to 320Vac
- Suitable for Luminaries of Protection Class I/II
- Fully LED Driver Protection by Up <2kV
- High Surge Protection of Up to 20 kV / 10 kA (L-N); Comply with IEC 61643-11 - T3
- Maximum Surge Protection of Up to 20 kA; Comply with IEC 61643-11 - T2
- TÜV Approved Acc. to IEC 61643-11 – T2 & T3
- IP20 (SPD G3)
- IP65 (SPD P5 G3)



Advantages

- High-performance module for outdoor and street lighting
- Dimensions aligned with Zhaga book 15
- Compatible with third party optics, e.g. from LEDIL
- High module efficiency for demanding lighting solutions
- Thermal monitoring with NTC on LED Module
- Several color temperature: 2,200 K, 2,700 K, 3,000 K, 4,000 K, 5,700 K and 6,500 K and with CRI > 70 and CRI > 80
- Initial color consistency: ≤ 5 SDCM
- PrevaLED Brick HP: focused on combination of high robustness and high efficiency
- PrevaLED Brick HP HE: focused on combination of high efficiency and high lumen output

About PrevaLED Brick


PrevaLED Brick is a LED Module series for Outdoor lighting application based on the Zhaga Standard

Different configurations based on LED quantities, CCT, CRI, LED Technology are available.

Comlying with Zhaga Book 15 (IP20 versions) and Book 19 (IP66 versions with dedicated optics)

Furthermore, PrevaLED Brick is also available with 2 different LED Strings for dual channels systems and integration into Tunable White applications

Safety Certifications



Product Name	Single Color (K)	Nominal Voltage (V)	Nominal Current (A)	On-Mode Power (W)	Luminous Efficacy (lm/W)	Luminous Flux (lm)	Number of LEDs Per Module
PL-BRICK HP 1000 740 2X2	4000	12	0,53	6	186	1110	4
PL-BRICK HP 1900 740 2X4	4000	23	0,53	12	186	2220	8
PL-BRICK HP 2850 740 2X6	4000	34	0,53	18	186	3330	12
PL-BRICK HP 1900 740 2X8	4000	45	0,53	24	186	4450	16
PL-BRICK HP 2850 740 2X6 IP G2	4000	34	0,53	18	186	3330	12
PL-BRICK HP 2850 740 2X4 HE	4000	23	0,53	12	204	2410	8
PL-BRICK HP 3800 740 2X6 HE	4000	34	0,53	18	204	3620	12
PL-BRICK HP 3800 740 2X8 HE	4000	45	0,53	24	204	4830	16
PL-BRICK HP 7500 740 3X8 HE IP	4000	70	0,53	37	208	7590	24
Product Name	Dual Color (K)	Nominal Voltage (V)	Nominal Current (A)	On-Mode Power (W)	Luminous Efficacy (lm/W)	Luminous Flux (lm)	Number of LEDs Per Module
PL-BRICK HP 3000 722-740 2X4 HE 2CH	2200	23	0,35	8	157	1250	2x4
	4000	23	0,35	8	195	1550	
PL-BRICK HP 6000 722-740 2X8 HE 2CH	2200	45	0,35	16	157	2510	2x8
	4000	45	0,35	16	195	3100	



Light is thrilling!

We craft 'Visual Referees' (IEEE 1789 flicker-free) with 1% super low ripple drivers, 'Endurance Guardians' (100,000h+ lifetime), and 'Scene Magicians' (44fps dynamic dimming) – so every stadium moment from a local training facility to an Olympic stadium, can enjoy their special moment worry free.

Expertise

Bring every pivotal moment to life with precision lighting that elevates your event’s impact!
For athletes, spectators, and broadcasters alike, unmatched performance demands certified illuminance levels, flawless uniformity, and real-time adaptability.



World-class



Dynamic control




Durability &
Energy efficiency

System Value

- Complete and harmonious lighting solutions with full - range LED drivers, modules and connectivity accessories, catering seamlessly to everything from training facilities to international sporting events.
- System compatibility relieve customers' worries.
- Reliable and long - lasting lighting design with 100,000+ hours lifetime and low maintenance requirements, ensuring stable operation in harsh environments.
- Flicker - free lighting design complies with IEEE 1789, providing a clear and comfortable visual experience for high – definition broadcasts.
- Precise and stable lighting control system supporting multiple protocols with as low as to 0.1% dimming and dynamic control up to 44fps, enabling personalized lighting adjustment for various sports scenarios.

Lighting System Solutions

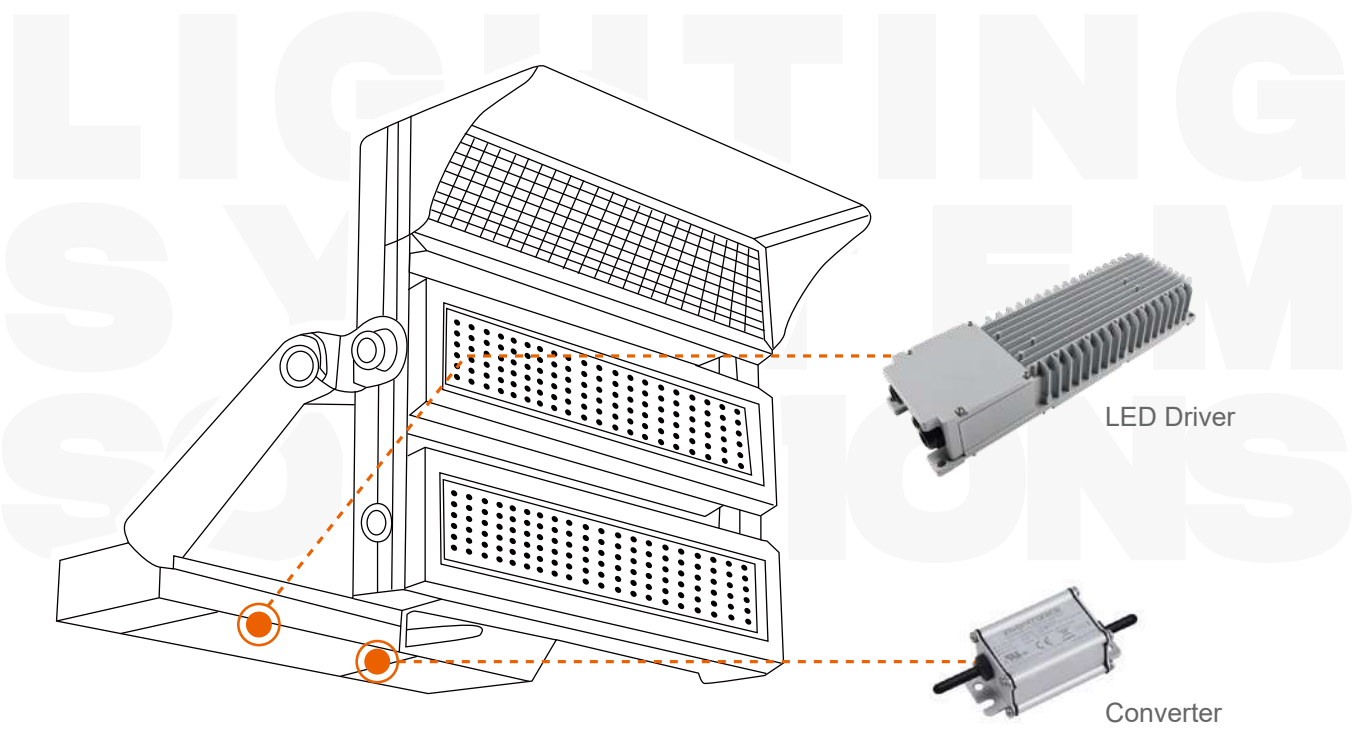

Sub-applications



Professional



Semi-Professional



Training/Recreation



Ports/Airports

Inventronics Cases

The stadium where the 2008 Beijing Olympics were held, one of China's top ten contemporary buildings.
National Stadium, China



The largest sports landmark in East Africa and a shining example of Sino-African friendship and cooperation.

National Stadium, Tanzania



A tennis sanctuary bearing tournament passion and urban glory.
Olympic Park Tennis Courts, Korea



The pearl of Qiandao lake, the only indoor venue for the cycling events of the Hangzhou Asian Games.

Asian Games Velodrome, China



01 Controls, Sensors, Programming Tools & Accessories

1.1 Software	Tuner4TRONIC	49
	DALI Wizard	49
1.2 Programming Tools	PRG-MUL2	49
	PRG-NFC-H	49
	PRG-NFC-D2	50
	DALI magic	50
1.3 Converters	CNV-DMXR2	50
	CNV-DALI2	50

02 LED Driver & Accessories

2.1 Connected - Constant Current	EUM-Mx, ESM-Mx	51
	EUM-Bx,ESM-Bx	54
	NFS-BC,NSS-BC	57
	NFM-Gx/Mx,NSM-Gx/Mx	59
	EFM-800Q/T	61
2.2 Simple DIM - Constant Current	SUM-Mx/Hx, SSM-Mx/Hx	63
2.3 Non Dimmable - Constant Current	EM P7 G2	65
2.4 Accessories	PU-10Kx05KBxA	67
	PU-20Kx10KTxx	67
	PU-20KS10KHT	67
	PS-20KS10KHT	67
	SPD G3	67
	ACC-LID-NFS	68

SOFTWARE

Software

Overview

Inventronics offers a comprehensive range of professional software solutions to support and configure its components.



T4T



Apps



Tuner4TRONIC

A software suite for OEMs that enables the configuration of all programmable OPTOTRONIC, ICUTRONIC, QUICKTRO NIC, and POWERTRONIC LED drivers during the luminaire manufacturing process.



DALI Wizard

A GUI tool for setting up, analyzing, and diagnosing DALI ECG installations, used in combination with the DALI Wizard control device.

PROGRAMMING TOOLS

Programming Tools

PRG-MUL2



FC CE

Features

- Programmer for All Inventronics DALI and 0-10V Programmable Drivers
- Offline Programming Capability
- Automatic Programming Mode

PRG-NFC-H



Features

- For Use with Inventronics NFC Enabled Drivers
- Zhaga Book 24 Compliant
- USB Powered
- IP30
- Connects to Inventronics Multi-Programmer

PRG-NFC-D2



Features

- For Use with Inventronics NFC Enabled Drivers
- Zhaga Book 24 Compliant
- USB Powered
- IP42
- Connects to Inventronics Multi-Programmer Software

DALI magic



Features

- USB DALI converter for Tuner4TRONIC and DALI wizard software for Windows PC
- Pushbutton to test DALI dimming without need of connection to computer
- Powered by USB or by included universal power supply
- Integrated automatic DALI supply of up to 64 devices (up to 4 if powered by USB)

CONVERTERS

Converters

DMX-RDM CNV-DMXR2 Stadium/Stage Lighting Management Solutions



FC CB CE

Features

- Converts DMX-RDM Signal to 0/1-10V Dimming Signal
- Compatible with RDM over DMX512 Networks with Bi-Directional Communication

DALI-2 CNV-DALI2 Stadium/Stage Lighting Management Solutions



FC CB CE

Features

- Convert DALI-2 Signal to 0/1-10V Dimming Signal
- Comply with DALI-2 Protocol
- Powered By Auxiliary Power with 3-Wire Connection to Driver



Advantages

- High Efficiency (Up to 96.5%)
- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with Programmability
- Input Voltage Range: 90 ~ 305Vac(EUM-Mx) 249-528Vac(ESM-Mx)
- Always-on Auxiliary Power: 12Vdc, 250mA, 3W (Transient Peak Power up to 10W)
- Output Lumen Compensation
- End-of-Life Indicator
- Input Surge Protection: DM 6kV, CM 10kV
- All-Around Protection: IUVP, IOVP, OVP, SCP, OTP
- IP66 / IP67 and UL Dry / Damp / Wet Location
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- 5-Year Warranty

Dimming Functions

- Isolated 0-10V / PWM / 3-Timer-Modes Dimmable
- INV Digital Dimming, UART Based Communication Protocol
- Dim-to-Off with Standby Power

Safety Certifications



About EUM-Mx

The EUM-Mx series offers full power at a wide output current range and supply Controls-Ready features such as Dim-to-Off and an Always-On Auxiliary Power of 12Vdc, 250mA with a transient peak up to 10W to better power occupancy and day-light sensors. This provides a cost-optimized solution by removing the need for additional power packs and AC Relays. They offer a reliable performance with a high level of built-in surge protection and added Input Over Voltage (IOV) and Input Under Voltage (IUV) protection to help against poor power quality supplies to the LED driver. The MG series provides a global cable to reduce inventory SKUs, the MT Series are UL Class P recognized and the MB series are BIS certified to offer a solution for a wide range of applications and regions.

About ESM-Mx

The ESM-Mx family are high input voltage Controls-Ready drivers offering OEMs a cost-optimized solution. They provide design flexibility with full power at a wide output current range. Their Controls-Ready features such as Dim-to-Off and an Always-On Auxiliary Power of 12Vdc, 250mA with a transient peak up to 10W to better power occupancy and daylight sensors. The ESM-Mx operates on a vast array of lighting control networks via a 0-10V dimming input. These IP66/IP67 drivers have industry-leading built-in surge protection and longer lifetimes for harsh environmental applications. They provide the added convenience of UL Class P (MT series) and models with a global cable to reduce inventory SKUs (MG series).

EUM-Mx

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 220Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
75	EUM-075S105Mx①	700 ~ 1050	36 ~ 107	90.5%	101,000 Tc= 70°C	142(125) × 67.5 × 36.5
	EUM-075S150Mx	1050 ~ 1500	25 ~ 72	89.5%		
	EUM-075S210Mx ★	1400 ~ 2100	18 ~ 54	89.0%		
100	EUM-100S105Mx	700 ~ 1050	48 ~ 143	92.5%	112,000 Tc= 70°C	148(131) × 67.5 × 36.5
	EUM-100S150Mx	1050 ~ 1500	34 ~ 95	92.5%		
	EUM-100S280Mx ★	1750 ~ 2800	17 ~ 54	91.0%		
150	EUM-150S105Mx	700 ~ 1050	72 ~ 214	93.5%	104,000 Tc= 70°C	178(161) × 67.5 × 36.5
	EUM-150S150Mx	1050 ~ 1500	50 ~ 143	93.0%		
	EUM-150S210Mx	1400 ~ 2100	36 ~ 107	92.5%		
	EUM-150S420Mx	2800 ~ 4200	18 ~ 54	91.5%		
200	EUM-200S105Mx	700 ~ 1050	95 ~ 286	93.5%	102,000 Tc= 70°C	188(171) × 67.5 × 36.5
	EUM-200S150Mx	1050 ~ 1500	67 ~ 190	93.5%		
	EUM-200S280Mx	1800 ~ 2800	36 ~ 111	93.0%		
	EUM-200S560Mx	3500 ~ 5600	18 ~ 57	92.0%		
240	EUM-240S105Mx	700 ~1050	115 ~ 343	94.0%	101,000 Tc= 70°C	218(201) × 67.5 × 38.5
	EUM-240S150Mx	1050 ~ 1500	80 ~ 229	93.5%		
	EUM-240S350Mx	2150 ~ 3500	35 ~ 111	93.0%		
	EUM-240S670Mx	4200 ~ 6700	18 ~ 57	92.5%		
320	EUM-320S105Mx	700 ~1050	153 ~ 457	94.5%	112,000 Tc= 70°C	243(224) × 80 × 44.5
	EUM-320S150Mx	1050 ~ 1500	107 ~ 305	94.0%		
	EUM-320S250Mx	1750 ~ 2500	64 ~183	94.0%		
	EUM-320S500Mx	2850 ~ 5000	32 ~ 112	93.5%		
400	EUM-320S760Mx	5350 ~ 7600	21 ~ 60	92.5%	113,000 Tc=70°C	262(243) × 90 × 43.5
	EUM-400S150Mx	1050 ~ 1500	133 ~ 381	94.5%		
	EUM-400S910Mx	7150 ~ 9100	24 ~ 56	94.0%		
480	EUM-480S140Mx	1050 ~ 1400	171 ~ 457	94.5%	102,000 Tc=70°C	262(243) × 90 × 43.5
	EUM-480S280Mx	2100 ~ 2800	86 ~ 228	94.0%		
	EUM-480S420Mx	3150 ~ 4200	57 ~ 152	94.0%		
	EUM-480S560Mx	4350 ~ 5600	43 ~ 110	94.0%		
	EUM-480S10AMx	8600 ~ 10000	24 ~ 56	94.0%		
680	EUM-680S170Mx	1250 ~ 1700	200 ~ 544	95.5%	107,000 Tc=70°C	275(250)×135 x 46
	EUM-680S240Mx	1800 ~ 2400	141.5 ~ 378	94.5%		
	EUM-680S350Mx	2600 ~ 3500	97.1 ~ 262	95.0%		
	EUM-680S560Mx	4200 ~ 5600	60.7 ~ 163	94.5%		
	EUM-680S840Mx	6300 ~ 8400	40.4 ~ 108	95.0%		
880	EUM-680S15AMx	12600 ~ 15000	22.6 ~ 54	95.5%	105,000 Tc= 70°C	275(250)×144 x 48.5
	EUM-880S280Mx	1950 ~ 2800	157 ~ 452	95.0%		
	EUM-880S420Mx	3000 ~ 4200	104 ~ 294	95.5%		
	EUM-880S700Mx	4900 ~ 7000	63 ~ 180	96.0%		
	EUM-880S11AMx	8000 ~ 11500	38 ~ 110	95.5%		
	EUM-880S20AMx	16300 ~ 20000	22 ~ 54	95.5%		

★ : Class 2 Model

① : x=G are UL Recognized, ENEC and CCC, etc. models; x=T are UL Class P models.

ESM-Mx

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff. @ 480Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
150	ESM-150S105Mx ^①	700 ~ 1050	72 ~ 214	93.5%	100,000 Tc=70°C	178(161)× 76.5× 38.5
	ESM-150S150Mx	1050 ~ 1500	50 ~ 143	93.0%		
	ESM-150S210Mx	1400 ~ 2100	36 ~ 107	92.5%		
	ESM-150S420Mx	2800 ~ 4200	18 ~ 54	92.0%		
240	ESM-240S105Mx	700 ~ 1050	115 ~ 343	94.0%	106,000 Tc= 70°C	218(201) × 76.5 × 38.5
	ESM-240S150Mx	1050 ~ 1500	80 ~ 229	93.5%		
	ESM-240S350Mx	2150 ~ 3500	35 ~ 111	93.0%		
	ESM-240S670Mx	4200 ~ 6700	18 ~ 57	92.5%		
320	ESM-320S105Mx	700 ~ 1050	153 ~ 457	95.0%	105,000 Tc= 70°C	243(224) × 85 × 44.5
	ESM-320S150Mx	1050 ~ 1500	107 ~ 305	94.5%		
	ESM-320S250Mx	1750 ~ 2500	64 ~ 183	94.5%		
	ESM-320S500Mx	2850 ~ 5000	32 ~ 112	94.0%		
	ESM-320S760Mx	5350 ~ 7600	21 ~ 60	94.0%		
480	ESM-480S140Mx	1050 ~ 1400	171 ~ 457	95.5%	100,000 Tc=70°C	262(243) × 90 × 43.5
	ESM-480S280Mx	2100 ~ 2800	86 ~ 228	95.5%		
	ESM-480S420Mx	3150 ~ 4200	57 ~ 152	95.0%		
	ESM-480S560Mx	4350 ~ 5600	43 ~ 110	95.0%		
	ESM-480S10AMx	8600 ~ 10000	24 ~ 56	95.0%		
680	ESM-680S170Mx/MGS	1250 ~ 1700	200 ~ 544	96.0%	102,000 Tc= 70°C	Mx: 275(250) ×135 x 46 MGS: 300(275) x 151 x 46
	ESM-680S240Mx/MGS	1800 ~ 2400	141.5 ~ 378	95.5%		
	ESM-680S350Mx/MGS	2600 ~ 3500	97.1 ~ 262	95.5%		
	ESM-680S560Mx/MGS	4200 ~ 5600	60.7 ~ 163	95.5%		
	ESM-680S840Mx/MGS	6300 ~ 8400	40.4 ~ 108	95.5%		
	ESM-680S15AMx/MGS	12600 ~ 15000	22.6 ~ 54	94.5%		
880	ESM-880S280Mx/MGS	1950 ~ 2800	157 ~ 452	96.0%	100,000 Tc= 70°C	Mx: 275(250)×x144 x 48.5 MGS: 300(275) x 160 x 48.5
	ESM-880S420Mx/MGS	3000 ~ 4200	104 ~ 294	95.5%		
	ESM-880S700Mx/MGS	4900 ~ 7000	63 ~ 180	96.0%		
	ESM-880S11AMx/MGS	8000 ~ 11500	38 ~ 110	95.0%		
	ESM-880S20AMx/MGS	16300 ~ 20000	22 ~ 54	95.5%		
1200	ESM-1K2S350Mx/MGS	2600 ~ 3500	171 ~ 462	96.5%	101,000 Tc= 70°C	Mx: 310(285) × 141 × 48.5 MGS: 330(305) x 166.5 x 49.5
	ESM-1K2S525Mx/MGS	3950 ~ 5250	114 ~ 304	96.0%		
	ESM-1K2S740Mx/MGS	5550 ~ 7400	81 ~ 217	96.5%		

① : x=G are UL Recognized, ENEC and CCC, etc. models; x=T are UL Class P models.



Advantages

- High Efficiency (Up to 96%)
- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with NFC
- Input Voltage Range: 90 ~ 305Vac(EUM-Bx) 249-528Vac(ESM-Bx)
- Integrated Power Metering with High Accuracy up to ±1%
- Output Lumen Compensation
- End-of-Life Indicator
- Thermal Sensing and Protection for LED Module
- Surge Protection: CM 6kV, DM10kV
- IP66 / IP67 and UL Dry / Damp / Wet Location
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- 7 Years Warranty

Dimming Functions

- DALI-2 and D4i Certified
- 3-Timer-Modes Dimmable
- Dim-to-Off with Low Standby Power

Safety Certifications



global-mark

About EUM-Bx

The EUM-Bx series is DALI-2 D4i certified, allowing for extensive health diagnostics tracking for the LED driver, seamless plug-and-play controls, and standardization of intra-luminaire designs. They are extremely flexible with wireless programmability via Near Field Communication (NFC) to help OEMs streamline production and simplify installation. The EUM-Bx series is Controls-Ready with Dim-to-Off and Always-On Auxiliary Power of 24Vdc, 125mA with a transient peak up to 10W. They also provide the added convenience of integrated power monitoring allowing users to measure energy consumption. The BG series provides a global cable to reduce inventory SKUs, the BT Series are UL Class P recognized, and the BB series are BIS certified to offer a solution for a wide range of applications and regions.Available also as DALI-2 in Class I and Class II (EUM-Ex and EUM-EE)

About ESM-Bx

The ESM-Bx series is DALI-2 D4i certified which allows the tracking and monitoring of health diagnostics for LED drivers, provides plug-and-play controls, and standardizes intra-luminaire designs. They are extremely flexible with wireless programmability via Near Field Communication (NFC) to help OEMs streamline production and simplify installation. The ESM-Bx series is Controls-Ready with Dim-to-Off and Always-On Auxiliary Power of 24Vdc, 125mA with a transient peak up to 10W. They also provide the added convenience of integrated power monitoring allowing users to measure energy consumption. The BG models utilize globally accepted cables that help reduce SKUs, the BT models provide UL Class P certification.

EUM-Bx

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 220Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
75	EUM-075S105Bx①	700 ~ 1050	36 ~ 107	90.5%	101,000 Tc= 70°C	142(125) × 67.5 × 36.5
	EUM-075S150Bx	1050 ~ 1500	25 ~ 72	89.5%		
	EUM-075S210Bx ★	1400 ~ 2100	18 ~ 54	89.0%		
100	EUM-100S105Bx	700 ~ 1050	48 ~ 143	92.5%	112,000 Tc= 70°C	148(131) × 67.5 × 36.5
	EUM-100S150Bx	1050 ~ 1500	34 ~ 95	92.5%		
	EUM-100S280Bx ★	1750 ~ 2800	17 ~ 54	91.0%		
150	EUM-150S105Bx	700 ~ 1050	72 ~ 214	93.5%	104,000 Tc= 70°C	178(161) × 67.5 × 36.5
	EUM-150S150Bx	1050 ~ 1500	50 ~ 143	93.0%		
	EUM-150S210Bx	1400 ~ 2100	36 ~ 107	92.5%		
	EUM-150S420Bx	2800 ~ 4200	18 ~ 54	91.5%		
200	EUM-200S105Bx	700 ~ 1050	95 ~ 286	93.5%	102,000 Tc= 70°C	188(171) × 67.5 × 36.5
	EUM-200S150Bx	1050 ~ 1500	67 ~ 190	93.5%		
	EUM-200S280Bx	1800 ~ 2800	36 ~ 111	93.0%		
	EUM-200S560Bx	3500 ~ 5600	18 ~ 57	92.0%		
240	EUM-240S105Bx	700 ~ 1050	115 ~ 343	94.0%	101,000 Tc= 70°C	218(201) × 67.5 × 38.5
	EUM-240S150Bx	1050 ~ 1500	80 ~ 229	93.5%		
	EUM-240S350Bx	2150 ~ 3500	35 ~ 111	93.0%		
	EUM-240S670Bx	4200 ~ 6700	18 ~ 57	92.5%		
320	EUM-320S105Bx	700 ~ 1050	153 ~ 457	94.5%	112,000 Tc=70°C	243(224) × 80 × 44.5
	EUM-320S150Bx	1050 ~ 1500	107 ~ 305	94.0%		
	EUM-320S250Bx	1750 ~ 2500	64 ~ 183	94.0%		
	EUM-320S500Bx	2850 ~ 5000	32 ~ 112	93.5%		
	EUM-320S760Bx	5350 ~ 7600	21 ~ 60	92.5%		
480	EUM-480S140BG	1050 ~ 1400	171 ~ 457	95.0%	110,000 Tc=70°C	262(243) × 90 × 43.5
	EUM-480S280BG	2100 ~ 2800	86 ~ 228	95.0%		
	EUM-480S420BG	3150 ~ 4200	57 ~ 152	94.0%		
	EUM-480S560BG	4350 ~ 5600	43 ~ 110	94.0%		
	EUM-480S10ABG	8600 ~ 10000	24 ~ 56	94.0%		
680	EUM-680S170BG	1250 ~ 1700	200 ~ 544	95.5%	107,000 Tc=70°C	275(250) × 135 × 46
	EUM-680S240BG	1800 ~ 2400	141.5 ~ 378	94.5%		
	EUM-680S350BG	2600 ~ 3500	97.1 ~ 262	95.0%		
	EUM-680S560BG	4200 ~ 5600	60.7 ~ 163	94.5%		
	EUM-680S840BG	6300 ~ 8400	40.4 ~ 108	95.0%		
	EUM-680S15ABG	12600 ~ 15000	22.6 ~ 54	95.5%		

★ : Class 2 Model

① : x=G are UL Recognized, ENEC and CCC, etc. models; x=T are UL Class P models; x=B are BIS models.

ESM-Bx

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 480Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
100	ESM-100S105Bx①	700 ~ 1050	48 ~ 143	92.0%	100,000 Tc=70°C	148(131) × 76.5 × 38.5
	ESM-100S150Bx	1050 ~ 1500	34 ~ 95	91.5%		
	ESM-100S280Bx	1750 ~ 2800	17 ~ 54	90.5%		
150	ESM-150S105Bx	700 ~ 1050	72 ~ 214	93.0%	100,000 Tc=70°C	178(161) × 76.5 × 38.5
	ESM-150S150Bx	1050 ~ 1500	50 ~ 143	93.0%		
	ESM-150S210Bx	1400 ~ 2100	36 ~ 107	92.5%		
	ESM-150S420Bx	2800 ~ 4200	18 ~ 54	92.0%		
240	ESM-240S105Bx	700 ~ 1050	115 ~ 343	94.0%	106,000 Tc=70°C	218(201) × 76.5 × 38.5
	ESM-240S150Bx	1050 ~ 1500	80 ~ 229	93.5%		
	ESM-240S350Bx	2150 ~ 3500	35 ~ 111	93.0%		
	ESM-240S670Bx	4200 ~ 6700	18 ~ 57	92.5%		
320	ESM-320S105Bx	700 ~ 1050	153 ~ 457	95.0%	105,000 Tc=70°C	243(224) × 85 × 44.5
	ESM-320S150Bx	1050 ~ 1500	107 ~ 305	94.5%		
	ESM-320S250Bx	1750 ~ 2500	64 ~ 183	94.5%		
	ESM-320S500Bx	2850 ~ 5000	32 ~ 112	94.0%		
	ESM-320S760Bx	5350 ~ 7600	21 ~ 60	94.0%		
480	ESM-480S140BG	1050 ~ 1400	171 ~ 457	95.0%	100,000 Tc=70°C	262(243) × 90 × 43.5
	ESM-480S280BG	2100 ~ 2800	86 ~ 228	94.0%		
	ESM-480S420BG	3150 ~ 4200	57 ~ 152	95.0%		
	ESM-480S560BG	4350 ~ 5600	43 ~ 110	94.5%		
	ESM-480S10ABG	8600 ~ 10000	24 ~ 56	94.5%		
680	ESM-680S170BG	1250 ~ 1700	200 ~ 544	96.0%	102,000 Tc=70°C	275(250) × 135× 46
	ESM-680S240BG	1800 ~ 2400	141.5 ~ 378	95.5%		
	ESM-680S350BG	2600 ~ 3500	97.1 ~ 262	95.5%		
	ESM-680S560BG	4200 ~ 5600	60.7 ~ 163	95.5%		
	ESM-680S840BG	6300 ~ 8400	40.4 ~ 108	95.5%		
	ESM-680S15ABG	12600 ~ 15000	22.6 ~ 54	94.5%		

① : x=G are UL Recognized, ENEC and CCC, etc. models; x=T are UL Class P models; x=B are BIS models.



Advantages

- Input Voltage Range: 180 ~ 528Vac (NFS-BC), 249-528Vac (NSS-BC)
- Non-Isolated Class I Driver
- No Afterglow
- Dim-to-Off with Standby Power ≤ 0.5W @ 230Vac(NFS)
- Dimming Range: 0.1%-100%
- Adjustable Output Current (AOC) with NFC
- Anode Output Connection (NFS-1K2D210BC)
2*600W Independent Programmable Channels & Support Common
- Anode Output Connection (NFS-1K8T210BC)
3*600W Independent Programmable Channels & Support Common
- Max Remote Distance Up to 300 Meter
- Ultra High Efficiency (Up to 97.5%)
- Full Power at Wide Output Current Range (Constant Power)
- Single-Channel (1*DT6 or 1*DMX) Operating Mode (NFS-600S210BC)
- Multi-Channel (2*DT6 or 2*DMX) Operating Mode (NFS-1K2D210BC)
- Multi-Channel (up to 3*DT6 or 3*DMX) Operating Mode (NFS-1K8T210BC)
- DALI-2/DMX-RDM Controls Up to 44 fps
- Integrated Power Metering with High Accuracy up to ±1%
- Thermal Sensing and Protection for LED Module
- Low Inrush Current
- Output Lumen Compensation
- End-of-Life Indicator
- Input Surge Protection: DM 10kV, CM 10kV
- All-Around Protection: IOVP, IUVP, OVP, SCP, OTP, OPP
- IP66
- IK08 Enclosure
- 5-Year Warranty

About NFS-BC & NSS-BC

The NFS family features a non-isolated design, enhancing its ultrahigh efficiency performance. It incorporates a remarkably wide input range spanning from 180-528Vac and supports various dimming methods like DALI-2/D4i, DMX/RDM, etc. Additionally, the NFS family offers a junction box to streamline the luminaire design and provides 1-CH, 2-CH, and 3-CH output designs.Available also for Input Voltage 249-528Vac(NSS-BC)

Dimming Functions

DALI-2 and D4i Certified & DMX-RDM & 3-Timer-Modes Dimmable

Safety Certifications




NFS-BC

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@480Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
600	NFS-600S210BC	1200 ~ 2100	176 ~ 500	97.0%	100,000 Tc=70°C	310 × 145 × 70
900	NFS-900S360BC	1800 ~ 3600	150 ~ 500	97.5%	100,000 Tc=70°C	310 × 145 × 70
1200	NFS-1K2D210BC	1200 ~ 2100	176 ~ 500	97.0%	100,000 Tc=70°C	500 × 152 × 80
1800	NFS-1K8T210BC	1200 ~ 2100	176 ~ 500	97.5%	115,000 Tc=70°C	500 × 152 × 80

NSS-BC

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@480Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
700	NSS-700S210BC	1400 ~ 2100	176 ~ 500	97.0%	100,000 Tc=70°C	310 × 145 × 70
1200	NSS-1K2S360BC	2400 ~ 3600	176 ~ 500	97.5%	102,000 Tc=70°C	310 × 145 × 70
1500	NSS-1K5D210BC	1500 ~ 2100	176 ~ 500	97.0%	100,000 Tc=70°C	500 × 152 × 80
2100	NSS-2K1T210BC	1400 ~ 2100	176 ~ 500	97.5%	110,000 Tc=70°C	500 × 152 × 80

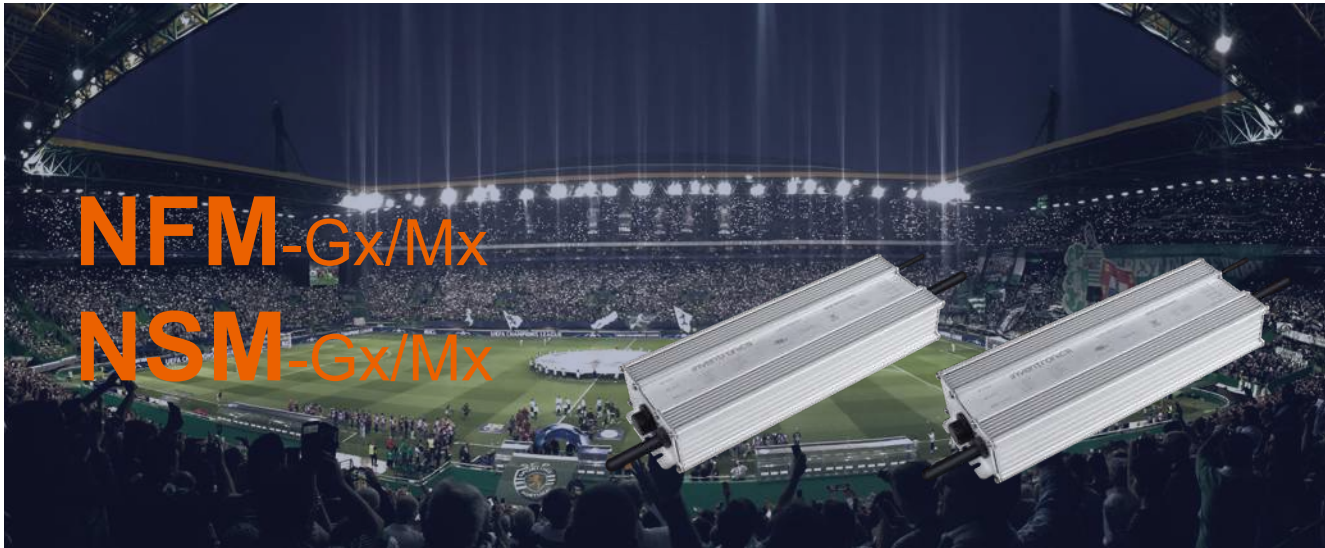

Advantages

- Input Voltage Range: 180 ~ 528Vac (NFM-Gx/Mx), 249 ~ 528Vac (NSM-Gx/Mx)
- Non-Isolated Class I Driver
- No Afterglow
- Ultra High Efficiency (Up to 97.5%)
- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with NFC
- Adjustable Dimming Curve
- Hold Time Adjustable
- Fade Time Adjustable
- Always-on Auxiliary Power: 12Vdc, 250mA (Except DMX-RDM Mode)
- Minimum Dimming Level Supports 0.1% for DALI-2 and DMX-RDM (Gx Models)
- Minimum Dimming Level Supports 1% for 0-10V, PWM, Resistor, and Digital Dimming
- Controls Up to 44 fps
- Integrated Power Metering with High Accuracy Up to ±1%
- Low Inrush Current
- Output Lumen Compensation
- End-of-Life Indicator
- Input Surge Protection: DM 10kV, CM 10kV
- All-Around Protection: OPP, IOVP, IUVP, OVP, SCP, OTP
- IP66 / IP67 and UL Dry / Damp / Wet Location
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- 5-Year Warranty

About NFM-Gx/Mx & NSM-Gx/Mx

The NFM family features a non-isolated design that delivers highly efficient performance. It incorporates an exceptionally wide input range from 180-528Vac and supports multiple dimming methods including DALI-2/D4i, DMX/RDM, 0-10V, and more. Available also for Input Voltage 249-528Vac (NSM-Gx/Mx).

Dimming Functions

- DALI-2 and D4i Certified (Gx Model)
- DALI-2 & DMX-RDM Dimmable & 0-10V & PWM & 3-Timer-Modes Dimmable & Resistor (Gx Model)
- Adjustable 0-10V & PWM & 3-Timer-Modes Dimmable & Resistor (Mx Model)
- INV Digital Dimming, UART Based Communication Protocol

Safety Certifications



NFM-Gx/Mx

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 480Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
500	NFM-500S200Gx/Mx①	1000 ~ 2000	150 ~ 500	96.0%	120,000 Tc=70°C	262(245) × 76.5 × 38.5
680	NFM-680S270Gx/Mx	1360 ~ 2700	150 ~ 500	97.0%	120,000 Tc=70°C	275(256) × 90 × 43.5
880	NFM-880S350Gx/Mx	1760 ~ 3500	150 ~ 500	97.0%	120,000 Tc=70°C	275(253) × 108 × 44.5
1200	NFM-1K2S480Gx/Mx	2400 ~ 4800	150 ~ 500	97.5%	108,000 Tc=70°C	310(288) × 108 × 48.5

NSM-Gx/Mx

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 480Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
680	NSM-680S200Gx/Mx	1360 ~ 2000	150 ~ 500	97.0%	120,000 Tc=70°C	262(245) × 76.5 × 38.5
880	NSM-880S270Gx/Mx	1760 ~ 2700	150 ~ 500	97.5%	120,000 Tc=70°C	275(256) × 90 × 43.5
1200	NSM-1K2S350Gx/Mx	2400 ~ 3500	150 ~ 500	Gx: 97.0% Mx: 97.5%	120,000 Tc=70°C	275(253) × 108 × 44.5
1500	NSM-1K5S480Gx/Mx	3000 ~ 4800	150 ~ 500	97.5%	120,000 Tc=70°C	310(288) × 108 × 48.5

① : x = G are UL Recognized, ENEC and CCC, etc. models; x = T are UL Class P models



Advantages

- Ultra High Efficiency (Up to 95%)
- Input Voltage Range: 180 ~ 528Vac
- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with NFC
- DALI-2 and D4i Certified
- DALI-2&DMX-RDM Dimmable
- Multi-channel (up to 4*DT6 or 4*DMX) Operating Mode
- Controls Up to 44 fps
- Dim-to-Off
- Dimming Range: 0.1%-100%
- Always-on Auxiliary Power: 24Vdc, 125mA (Except DMX-RDM mode)
- Low Inrush Current
- Output Lumen Compensation
- End-of-Life Indicator
- Input Surge Protection: DM 6kV, CM 10kV
- All-Around Protection: IUVP, IOVP, OVP, SCP, OTP
- IP66 / IP67 and UL Dry / Damp / Wet Location
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- 5 Years Warranty

Dimming Functions

- DALI-2 & D4i & DMX-RDM
- DIM-to-off


Safety Certifications



About EFM-800Q/T

The EFM series is 800W, 3 or 4 channels, constant-current, programmable LED driver that operates from 180-528Vac input with excellent power factor.The dimming control supports DALI-2 & D4i & DMX-RDM with multiple channel output to enable dynamic color control in sports or outdoor lighting. It provides an auxiliary 24V output and dim-to-off functionality for powering low voltage, wireless controls.

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@480Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
200	EFM-800Q105BT	700 ~ 1050	150 ~ 286	95.0%	52,000 Tc=80°C	310(285) × 141 × 48.5
200		700 ~ 1050	150 ~ 286			
200		700 ~ 1050	150 ~ 286			
200		700 ~ 1050	150 ~ 286			
267	EFM-800T140BT	950 ~ 1400	150 ~ 286	95.0%	52,000 Tc=80°C	310(285) × 141 × 48.5
267		950 ~ 1400	150 ~ 286			
267		950 ~ 1400	150 ~ 286			

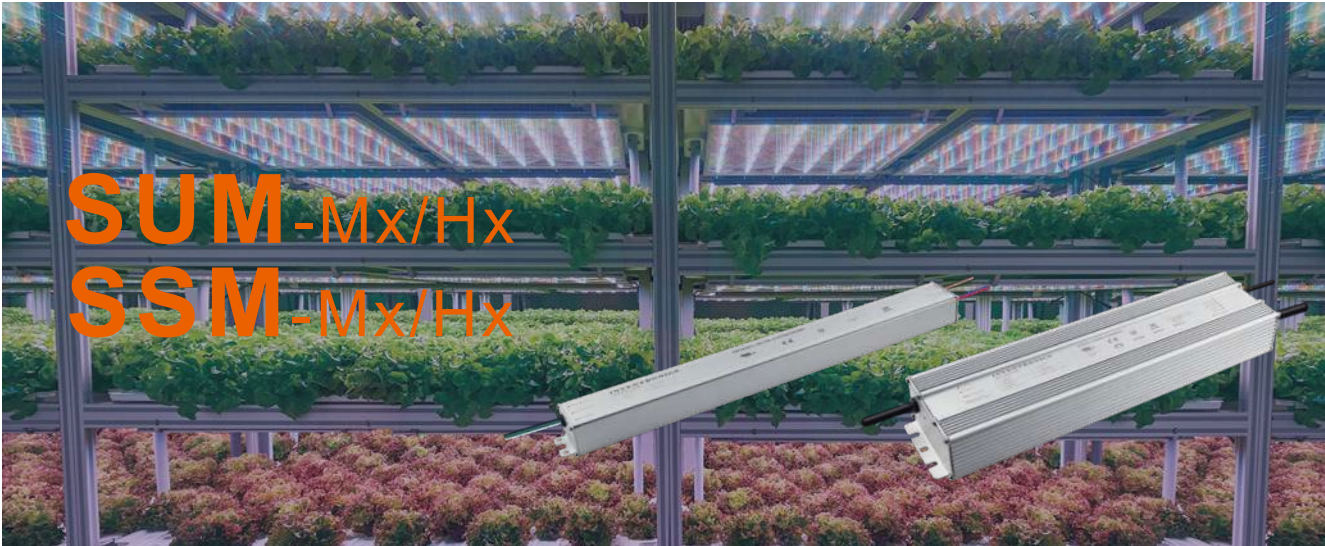

Advantages

- High Efficiency (Up to 96.0%)
- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with Programmability
- Input Voltage Range: 90 ~ 305Vac(SUM-Mx/Hx), 249 ~ 528Vac(SSM-Mx/Hx)
- Fade Time Adjustable
- Output Lumen Compensation
- End-of-Life Indicator
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- Input Surge Protection Up to: DM 6kV, CM 10kV
- 5-Year Warranty

Safety Certifications



110W, 220W, 330W, 440W Features

- 43.5mm Width
- Maximum Dimming Level with 9V or 10V Selectable
- Dim-to-Off with Standby Power ≤ 0.5 W (MF Models)
- Dim-to-Low-Voltage(DTLV) with Standby Power ≤0.5W (HF Models)
- Isolated 0-10V / 10V PWM / Resistor / 3-Timer-Modes
- Always-on Auxiliary Power: 12Vdc, 250mA (MF Models)
- Low Inrush Current (Above 220W)
- IP65 and UL Dry / Damp Location
- All-Around Protection: OVP, SCP, OTP

760W, 1000W, 1500W Features

- 90mm Width
- Maximum Dimming Level with 9V or 10V Selectable
- Minimum Dimming Level with 5% or 10% Selectable
- INV Digital Dimming, UART Based Communication Protocol
- Isolated 0-10V / PWM / Resistor / 3-Timer-Modes
- Always-on Auxiliary Power: 12Vdc, 250mA
- Dim-to-Off with Standby Power ≤ 0.5 W
- Hot-Plugging Protection
- Parallel LED Protection
- IP66 / IP67 and UL Dry / Damp / Wet Location
- All-Around Protection: IOVP, IUVP, OVP, SCP, OTP

About SUM-Mx/Hx

The SUM family encompasses slim products tailored for the horticulture industry and other applications that require a linear form factor and can operate within an input voltage range of 90-305Vac. They provide high efficiency to reduce electricity consumption.

About SSM-Mx/Hx

The SSM family are slim products for the horticulture industry and other applications requiring a linear form factor with an input voltage range of 249-528Vac. They provide high efficiency to reduce electricity consumption.

SUM-Mx/Hx

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 220Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
110	SUM-110S105Mx①HF	700 ~ 1050	80 ~ 157	Mx:91.5% HF:91.0%	120,000 Tc=70°C	MF/HF: 210(186) × 43.5 × 31.5 MG/MT: 220(196) × 43.5 × 31.5
	SUM-110S260Mx/HF	1950 ~ 2600	30 ~ 56	Mx:91.0% HF:90.5%	120,000 Tc=70°C	
220	SUM-220S530Mx/HF	4100 ~ 5300	30 ~ 54	94.0%	120,000 TC=70°C	MF/HF: 296(272) × 43.5 × 31.5 MG/MT: 306(282) × 43.5 × 31.5
330	SUM-330S690Mx/HF	6100 ~ 6900	34 ~ 54	Mx:95.5% HF:95.0%	103,000 TC=70°C	MF/HF: 396(372) × 43.5 × 31.5 MG/MT: 406(382) × 43.5 × 31.5
440	SUM-440S920Mx/HF	8200 ~ 9200	34 ~ 54	94.0%	117,000 TC=70°C	MF/HF: 426(402) × 43.5 × 31.5 MG/MT: 436(412) × 43.5 × 31.5
760	SUM-760S15AMx	14000 ~ 15800	34 ~ 54	95.5%	102,000 Tc=70°C	379(354) × 90 × 48.5
1000	SUM-1K0S400Mx	3200 ~ 4000	175 ~ 312	95.0%	110,000 Tc=70°C	414(389) × 90 × 48.5
	SUM-1K0S840Mx	6720 ~ 8400	84 ~ 149	95.0%	110,000 Tc=70°C	414(389) × 90 × 48.5
	SUM-1K0S21AMx	18500 ~ 21000	34 ~ 54	95.5%	110,000 Tc=70°C	414(389) × 90 × 48.5
1500	SUM-1K5S600Mx	4000 ~ 6000	175 ~ 375	96.0%	104,000 Tc=70°C	489(464) × 90 × 48.5
	SUM-1K5S12AMx	10000 ~ 12500	84 ~ 150	96.0%	104,000 Tc=70°C	489(464) × 90 × 48.5
	SUM-1K5S31AMx	28000 ~ 31500	34 ~ 54	96.0%	104,000 Tc=70°C	489(464) × 90 × 48.5

SSM-Mx/Hx

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 480Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
220	SSM-220S530Mx①/HF	4100 ~ 5300	34 ~ 54	94.5%	116,000 TC=70°C	MF/HF: 336(312) × 43.5 × 31.5 MG/MT: 346(322) × 43.5 × 31.5
330	SSM-330S690Mx/HF	6100 ~ 6900	34 ~ 54	Mx: 95.0% HF: 94.5%	108,000 TC=70°C	MF/HF: 416(392) × 43.5 × 31.5 MG/MT: 426(402) × 43.5 × 31.5
440	SSM-440S920Mx/HF	8200 ~ 9200	34 ~ 54	95.0%	108,000 TC=70°C	MF/HF: 426(402) × 43.5 × 31.5 MG/MT: 436(412) × 43.5 × 31.5
760	SSM-760S15AMx	14000 ~ 15800	34 ~ 54	95.0%	111,000 Tc=70°C	379(354) × 90 × 48.5
1000	SSM-1K0S400Mx	3200 ~ 4000	175 ~ 312	96.0%	100,000 Tc=70°C	414(389) × 90 × 48.5
	SSM-1K0S840Mx	6720 ~ 8400	84 ~ 149	95.5%	100,000 Tc=70°C	414(389) × 90 × 48.5
	SSM-1K0S21AMx	18500 ~ 21000	34 ~ 54	96.0%	100,000 Tc=70°C	414(389) × 90 × 48.5
1500	SSM-1K5S600Mx	4000 ~ 6000	175 ~ 375	96.0%	100,000 Tc=70°C	489(464) × 90 × 48.5
	SSM-1K5S12AMx	10000 ~ 12500	84 ~ 180	95.5%	100,000 Tc=70°C	489(464) × 90 × 48.5
	SSM-1K5S31AMx	28000 ~ 31500	34 ~ 54	96.0%	100,000 Tc=70°C	489(464) × 90 × 48.5

① : x = G are UL Recognized, CE, etc. models; x = T are UL Recognized, CE(built-in-use), etc. models; x = F are UL Recognized, CE(built-in-use) etc. models with flying leads.



Advantages

- High efficiency up to 96%
- Input Voltage Range: 108 ~ 305Vac
- Fix output of 700mA
- Long life time
- Input Surge Protection: DM 6kV, CM 6kV
- Suitable for Luminaires with Protection Class I
- IP67

Dimming Functions

N/A

Safety Certifications



About EM P7 G2

The EM P7 G2 series is constant-current LED driver that operates from 108-305Vac and providing a stable, efficient solution for outdoor area lighting.

Output Power (W)	Product Name	Adjustable Current Range(mA)	Output Voltage Range (Vdc)	Eff. @ 220Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
100W	EM 100/120-277/700 P7 G2	700	100 ~ 143	93.5%	50,000 Tc=75°C	143.5 x 56 x 33
150W	EM 150/120-277/700 P7 G2	700	150 ~ 215	94.5%	50,000 Tc=75°C	143.5 x 56 x 33
200W	EM 200/120-277/700 P7 G2	700	200 ~ 285	95.5%	50,000 Tc=75°C	150.5 x 56 x 33
240W	EM 250/120-277/700 P7 G2	700	240 ~ 343	96.0%	50,000 Tc=75°C	150.5 x 56 x 33

PU-10Kx05KBxA



■ Features

- 90-305Vac Working Input Voltage
- Uoc=10kV & In=5kA
- Certified for both EN 61643-11 - T2 & T3
- Protection Mode for TN, TT and IT-Systems
- Available for Series & Parallel Installation
- Available for Class I & Class II luminaires
- Double Thermally Protected
- End-of-life LED Indicator
- High Temperature, 85°C Maximum Surface Temp
- Input Over Voltage Protection at 440Vac with 48 Hours
- IP66 / IP67

PU-20Kx10KTxx



■ Features

- Compatible with Inventronics LED Drivers
- 90-305Vac Working Input Voltage
- 15 kA Maximum, 10 kA Nominal (15 strikes) Surge Current Rating Using Industry Standard 8/20µs Wave
- UL1449 Type 4, EN 61643-11 – Surge Protective Devices T2 & T3
- IEEE C62.41.2 Location Category C High
- High Temperature, 85°C Maximum Ambient
- Flameproof Plastic Enclosure
- IP66

PU-20KS10KHT



■ Features

- Compatible with Inventronics LED Drivers
- 90-305Vac Working Input Voltage
- DM, CM Surge Protection Mode
- Maximum Discharge Current (Imax) 20kA, 8/20µs
- Nominal Discharge Current (In) 10kA, 8/20µs
- UL1449 Type 5 Recognized Component
- IEEE C62.41.2 Location Category C High Exposure
- High Temperature, 85°C Maximum Surface Temp Rating

PS-20KS10KHT



■ Features

- Compatible with Inventronics LED Drivers
- 249-528Vac Working Input Voltage
- DM, CM Surge Protection Mode
- Maximum Discharge Current (Imax) 20kA, 8/20µs
- Nominal Discharge Current (In) 10kA, 8/20µs
- UL1449 Type 5 Recognized Component
- IEEE C62.41.2 Location Category C High Exposure
- High Temperature, 85°C Maximum Surface Temp Rating


SPD G3



■ Features

- Mains Voltage to 320Vac
- Suitable for Luminaires of Protection Class I/II
- Fully LED Driver Protection by Up <2kV
- High Surge Protection of Up to 20 kV / 10 kA (L-N); Comply with IEC 61643-11 - T3
- Maximum Surge Protection of Up to 20 kA; Comply with IEC 61643-11 - T2
- TÜV Approved Acc. to IEC 61643-11 – T2 & T3
- IP20(SPD G3)
- IP65(SPD P5 G3)

ACC-LID-NFS



■ Features

- Lid with Standard Mounting Hole for ZHAGA BOOK18 Socket
- Easy assembly And Spare Accessories are Included
- Suitable for Inventronics NFS & NSS Series Drivers



Light for sustainable growth!

We craft 'Spectrum Chefs' (dynamic 380-800nm tuning) with multi-channel drivers, 'Energy Savers' (97.5% efficiency), and 'Environment Guardians' (IP67 waterproofing) – so every plant savors a tailored light recipe, turning growers' harvests from weather-dependent to light-driven.

Expertise

At the core of every bountiful harvest lies precision lighting. As the global leader in agricultural LED drivers, Inventronics delivers durable, fully customizable systems that adapt to your crops' lifecycle needs: Our advanced Horticulture lighting systems deliver:



Evergreen reliability



Dynamic spectrum control
to boost yields



Energy efficiency for
cutting utility costs

System Value

- Multi-channel drivers with Power Transfer enabling dynamic 380-800nm wavelength adjustments to optimize photosynthesis boost yields.
- 97%+ driver efficiency with high luminous efficacy cuts energy costs.
- Multi-protocol support (0-10V/Digital dimming/ D4i) enable adaptive lighting strategies and fully controlled environment for harvest guarantee.
- IP67-rated waterproof drivers ensure reliable operation in humid greenhouses and extreme-temperature environments, minimizing downtime.
- Flexible lighting scheme setting with a precise control system.

Sub-applications



Greenhouse



In farming




Animal Farming



Aqua Culture

Lighting System Solutions

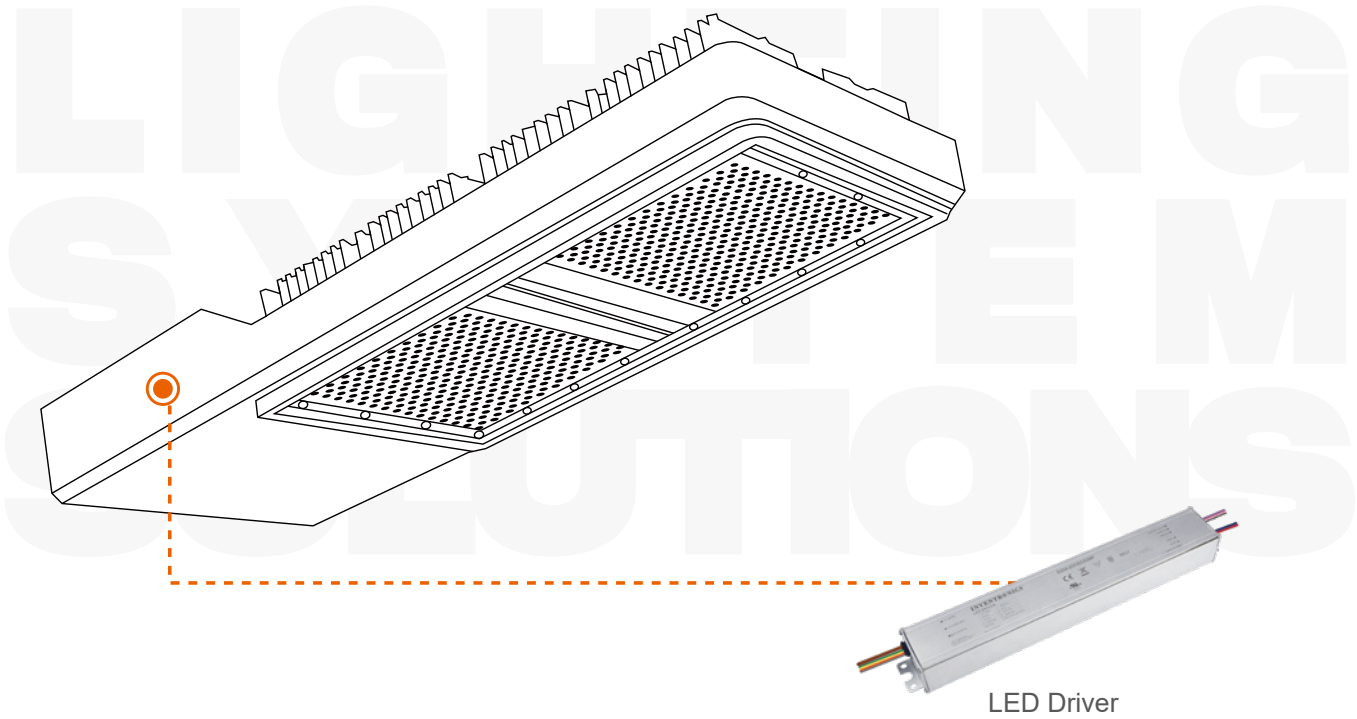

▶ A green lab nurturing natural wonders with artificial light.
Green house, the Netherlands



Inventronics Cases



◀ Every tomato is nurtured by the gentle embrace of lighting, each bite a burst of sweetness.
Tomato Green house, Belgium



01 Controls, Sensors, Programming Tools & Accessories

1.1 Software	Tuner4TRONIC	77
	DALI Wizard	77
1.2 Programming Tools	PRG-MUL2	77
	PRG-NFC-H	77
	PRG-NFC-D2	78
	DALI magic	78
1.3 Converters	CNV-DALI2	78

02 LED Driver & Accessories

2.1 Connected - Constant Current	EUM-Mx, ESM-Mx	79
	NSM-1K2Q	82
	NFM-Gx/Mx, NSM-Gx/Mx	83
	ESM-1K0D/1K2T	85
2.2 Simple DIM - Constant Current	NFL-Mx	87
	NEL	88
	SUM-Mx/Hx, SSM-Mx/Hx	89
	SUM-MGS/MGR, SSM-MGS/MGR	91
2.4 Accessories	PU-10Kx05KBxA	93
	PU- 20Kx10KTxx	93
	PU- 20KS10KHT	93
	PS-20KS10KHT	93
	SPD G3	94

03 Light Modules & Accessories

3.1 Rigid	Planta Seed Brick	95
	Planta Seed Linear	96

SOFTWARE

Software

Overview

Inventronics offers a comprehensive range of professional software solutions to support and configure its components.



T4T



Apps



Tuner4TRONIC

A software suite for OEMs that enables the configuration of all programmable OPTOTRONIC, ICUTRONIC, QUICKTRO NIC, and POWERTRONIC LED drivers during the luminaire manufacturing process.



DALI Wizard

A GUI tool for setting up, analyzing, and diagnosing DALI ECG installations, used in combination with the DALI Wizard control device.

PROGRAMMING TOOLS

Programming Tools

PRG-MUL2



FC CE

Features

- Programmer for All Inventronics DALI and 0-10V Programmable Drivers
- Offline Programming Capability
- Automatic Programming Mode

PRG-NFC-H



Features

- For Use with Inventronics NFC Enabled Drivers
- Zhaga Book 24 Compliant
- USB Powered
- IP30
- Connects to Inventronics Multi-Programmer

PRG-NFC-D2



Features

- For Use with Inventronics NFC Enabled Drivers
- Zhaga Book 24 Compliant
- USB Powered
- IP42
- Connects to Inventronics Multi-Programmer Software

DALI magic



Features

- USB DALI converter for Tuner4TRONIC and DALI wizard software for Windows PC
- Pushbutton to test DALI dimming without need of connection to computer
- Powered by USB or by included universal power supply
- Integrated automatic DALI supply of up to 64 devices (up to 4 if powered by USB)

CONVERTERS

Converters

DALI-2 CNV-DALI2 DALI-2 Stadium/Stage Lighting Management Solutions



UL US FC CB CE

Features

- Convert DALI-2 Signal to 0/1-10V Dimming Signal
- Comply with DALI-2 Protocol
- Powered By Auxiliary Power with 3-Wire Connection to Driver



Advantages

- High Efficiency (Up to 96.5%)
- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with Programmability
- Input Voltage Range: 90 ~ 305Vac(EUM-Mx) 249-528Vac(ESM-Mx)
- Always-on Auxiliary Power: 12Vdc, 250mA, 3W (Transient Peak Power up to 10W)
- Output Lumen Compensation
- End-of-Life Indicator
- Input Surge Protection: DM 6kV, CM 10kV
- All-Around Protection: IUVP, IOVP, OVP, SCP, OTP
- IP66 / IP67 and UL Dry / Damp / Wet Location
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- 5-Year Warranty

Dimming Functions

- Isolated 0-10V / PWM / 3-Timer-Modes Dimmable
- INV Digital Dimming, UART Based Communication Protocol
- Dim-to-Off with Standby Power

Safety Certifications



About EUM-Mx

The EUM-Mx series offers full power at a wide output current range and supply Controls-Ready features such as Dim-to-Off and an Always-On Auxiliary Power of 12Vdc, 250mA with a transient peak up to 10W to better power occupancy and day-light sensors. This provides a cost-optimized solution by removing the need for additional power packs and AC Relays. They offer a reliable performance with a high level of built-in surge protection and added Input Over Voltage (IOV) and Input Under Voltage (IUV) protection to help against poor power quality supplies to the LED driver. The MG series provides a global cable to reduce inventory SKUs, the MT Series are UL Class P recognized and the MB series are BIS certified to offer a solution for a wide range of applications and regions.

About ESM-Mx

The ESM-Mx family are high input voltage Controls-Ready drivers offering OEMs a cost-optimized solution. They provide design flexibility with full power at a wide output current range. Their Controls-Ready features such as Dim-to-Off and an Always-On Auxiliary Power of 12Vdc, 250mA with a transient peak up to 10W to better power occupancy and daylight sensors. The ESM-Mx operates on a vast array of lighting control networks via a 0-10V dimming input. These IP66/IP67 drivers have industry-leading built-in surge protection and longer lifetimes for harsh environmental applications. They provide the added convenience of UL Class P (MT series) and models with a global cable to reduce inventory SKUs (MG series).

EUM-Mx

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 220Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
75	EUM-075S105Mx①	700 ~ 1050	36 ~ 107	90.5%	101,000 Tc= 70°C	142(125) × 67.5 × 36.5
	EUM-075S150Mx	1050 ~ 1500	25 ~ 72	89.5%		
	EUM-075S210Mx ★	1400 ~ 2100	18 ~ 54	89.0%		
100	EUM-100S105Mx	700 ~ 1050	48 ~ 143	92.5%	112,000 Tc= 70°C	148(131) × 67.5 × 36.5
	EUM-100S150Mx	1050 ~ 1500	34 ~ 95	92.5%		
	EUM-100S280Mx ★	1750 ~ 2800	17 ~ 54	91.0%		
150	EUM-150S105Mx	700 ~ 1050	72 ~ 214	93.5%	104,000 Tc= 70°C	178(161) × 67.5 × 36.5
	EUM-150S150Mx	1050 ~ 1500	50 ~ 143	93.0%		
	EUM-150S210Mx	1400 ~ 2100	36 ~ 107	92.5%		
	EUM-150S420Mx	2800 ~ 4200	18 ~ 54	91.5%		
200	EUM-200S105Mx	700 ~ 1050	95 ~ 286	93.5%	102,000 Tc= 70°C	188(171) × 67.5 × 36.5
	EUM-200S150Mx	1050 ~ 1500	67 ~ 190	93.5%		
	EUM-200S280Mx	1800 ~ 2800	36 ~ 111	93.0%		
	EUM-200S560Mx	3500 ~ 5600	18 ~ 57	92.0%		
240	EUM-240S105Mx	700 ~1050	115 ~ 343	94.0%	101,000 Tc= 70°C	218(201) × 67.5 × 38.5
	EUM-240S150Mx	1050 ~ 1500	80 ~ 229	93.5%		
	EUM-240S350Mx	2150 ~ 3500	35 ~ 111	93.0%		
	EUM-240S670Mx	4200 ~ 6700	18 ~ 57	92.5%		
320	EUM-320S105Mx	700 ~1050	153 ~ 457	94.5%	112,000 Tc= 70°C	243(224) × 80 × 44.5
	EUM-320S150Mx	1050 ~ 1500	107 ~ 305	94.0%		
	EUM-320S250Mx	1750 ~ 2500	64 ~183	94.0%		
	EUM-320S500Mx	2850 ~ 5000	32 ~ 112	93.5%		
400	EUM-320S760Mx	5350 ~ 7600	21 ~ 60	92.5%	113,000 Tc=70°C	262(243) × 90 × 43.5
	EUM-400S150Mx	1050 ~ 1500	133 ~ 381	94.5%		
	EUM-400S910Mx	7150 ~ 9100	24 ~ 56	94.0%		
480	EUM-480S140Mx	1050 ~ 1400	171 ~ 457	94.5%	102,000 Tc=70°C	262(243) × 90 × 43.5
	EUM-480S280Mx	2100 ~ 2800	86 ~ 228	94.0%		
	EUM-480S420Mx	3150 ~ 4200	57 ~ 152	94.0%		
	EUM-480S560Mx	4350 ~ 5600	43 ~ 110	94.0%		
	EUM-480S10AMx	8600 ~ 10000	24 ~ 56	94.0%		
680	EUM-680S170Mx	1250 ~ 1700	200 ~ 544	95.5%	107,000 Tc=70°C	275(250)×135 x 46
	EUM-680S240Mx	1800 ~ 2400	141.5 ~ 378	94.5%		
	EUM-680S350Mx	2600 ~ 3500	97.1 ~ 262	95.0%		
	EUM-680S560Mx	4200 ~ 5600	60.7 ~ 163	94.5%		
	EUM-680S840Mx	6300 ~ 8400	40.4 ~ 108	95.0%		
880	EUM-680S15AMx	12600 ~ 15000	22.6 ~ 54	95.5%	105,000 Tc= 70°C	275(250)×144 x 48.5
	EUM-880S280Mx	1950 ~ 2800	157 ~ 452	95.0%		
	EUM-880S420Mx	3000 ~ 4200	104 ~ 294	95.5%		
	EUM-880S700Mx	4900 ~ 7000	63 ~ 180	96.0%		
	EUM-880S11AMx	8000 ~ 11500	38 ~ 110	95.5%		
	EUM-880S20AMx	16300 ~ 20000	22 ~ 54	95.5%		

★ : Class 2 Model

① : x=G are UL Recognized, ENEC and CCC, etc. models; x=T are UL Class P models.

ESM-Mx

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff. @ 480Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
150	ESM-150S105Mx ^①	700 ~ 1050	72 ~ 214	93.5%	100,000 Tc=70°C	178(161)× 76.5× 38.5
	ESM-150S150Mx	1050 ~ 1500	50 ~ 143	93.0%		
	ESM-150S210Mx	1400 ~ 2100	36 ~ 107	92.5%		
	ESM-150S420Mx	2800 ~ 4200	18 ~ 54	92.0%		
240	ESM-240S105Mx	700 ~ 1050	115 ~ 343	94.0%	106,000 Tc= 70°C	218(201) × 76.5 × 38.5
	ESM-240S150Mx	1050 ~ 1500	80 ~ 229	93.5%		
	ESM-240S350Mx	2150 ~ 3500	35 ~ 111	93.0%		
	ESM-240S670Mx	4200 ~ 6700	18 ~ 57	92.5%		
320	ESM-320S105Mx	700 ~ 1050	153 ~ 457	95.0%	105,000 Tc= 70°C	243(224) × 85 × 44.5
	ESM-320S150Mx	1050 ~ 1500	107 ~ 305	94.5%		
	ESM-320S250Mx	1750 ~ 2500	64 ~ 183	94.5%		
	ESM-320S500Mx	2850 ~ 5000	32 ~ 112	94.0%		
	ESM-320S760Mx	5350 ~ 7600	21 ~ 60	94.0%		
480	ESM-480S140Mx	1050 ~ 1400	171 ~ 457	95.5%	100,000 Tc=70°C	262(243) × 90 × 43.5
	ESM-480S280Mx	2100 ~ 2800	86 ~ 228	95.5%		
	ESM-480S420Mx	3150 ~ 4200	57 ~ 152	95.0%		
	ESM-480S560Mx	4350 ~ 5600	43 ~ 110	95.0%		
	ESM-480S10AMx	8600 ~ 10000	24 ~ 56	95.0%		
680	ESM-680S170Mx/MGS	1250 ~ 1700	200 ~ 544	96.0%	102,000 Tc= 70°C	Mx: 275(250) ×135 x 46 MGS: 300(275) x 151 x 46
	ESM-680S240Mx/MGS	1800 ~ 2400	141.5 ~ 378	95.5%		
	ESM-680S350Mx/MGS	2600 ~ 3500	97.1 ~ 262	95.5%		
	ESM-680S560Mx/MGS	4200 ~ 5600	60.7 ~ 163	95.5%		
	ESM-680S840Mx/MGS	6300 ~ 8400	40.4 ~ 108	95.5%		
	ESM-680S15AMx/MGS	12600 ~ 15000	22.6 ~ 54	94.5%		
880	ESM-880S280Mx/MGS	1950 ~ 2800	157 ~ 452	96.0%	100,000 Tc= 70°C	Mx: 275(250)×144 x 48.5 MGS: 300(275) x 160 x 48.5
	ESM-880S420Mx/MGS	3000 ~ 4200	104 ~ 294	95.5%		
	ESM-880S700Mx/MGS	4900 ~ 7000	63 ~ 180	96.0%		
	ESM-880S11AMx/MGS	8000 ~ 11500	38 ~ 110	95.0%		
	ESM-880S20AMx/MGS	16300 ~ 20000	22 ~ 54	95.5%		
1200	ESM-1K2S350Mx/MGS	2600 ~ 3500	171 ~ 462	96.5%	101,000 Tc= 70°C	Mx: 310(285) × 141 × 48.5 MGS: 330(305) x 166.5 x 49.5
	ESM-1K2S525Mx/MGS	3950 ~ 5250	114 ~ 304	96.0%		
	ESM-1K2S740Mx/MGS	5550 ~ 7400	81 ~ 217	96.5%		



Advantages

- Non-Isolated Design with Low Residual Output Voltage
- Independent Four Output Channels
- Dynamic Power Transfer and Traditional Power Transfer Selectable
- Full Power at Wide Output Current Range (Constant Power)
- Input Voltage Range: 249 ~ 528Vac
- Adjustable Output Current (AOC)with Programmability
- Integrated Power Metering with High Accuracy up to ±1%
- Hold Time Adjustable
- Fade Time Adjustable
- Always-on Auxiliary Power: 12Vdc, 500mA
- Low Inrush Current
- Output Lumen Compensation
- End-of-Life Indicator
- Input Surge Protection: DM 6kV, CM 10kV
- All-Around Protection: IUVP, IOVP, OVP, SCP, OTP, OPP
- 5 Years Warranty


Dimming Functions

- INV Digital Dimming, UART Based Communication Protocol
- Dim-to-Off

Safety Certifications

CE CB

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@480Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
660	NSM-1K2Q200MG	1300 ~ 2000	200 ~ 500	95.5%	54,000 Tc=80°C	499(474) × 90 × 48.5
180		1400 ~ 2200	40 ~ 129			
180		1400 ~ 2200	40 ~ 129			
180		1400 ~ 2200	40 ~ 129			

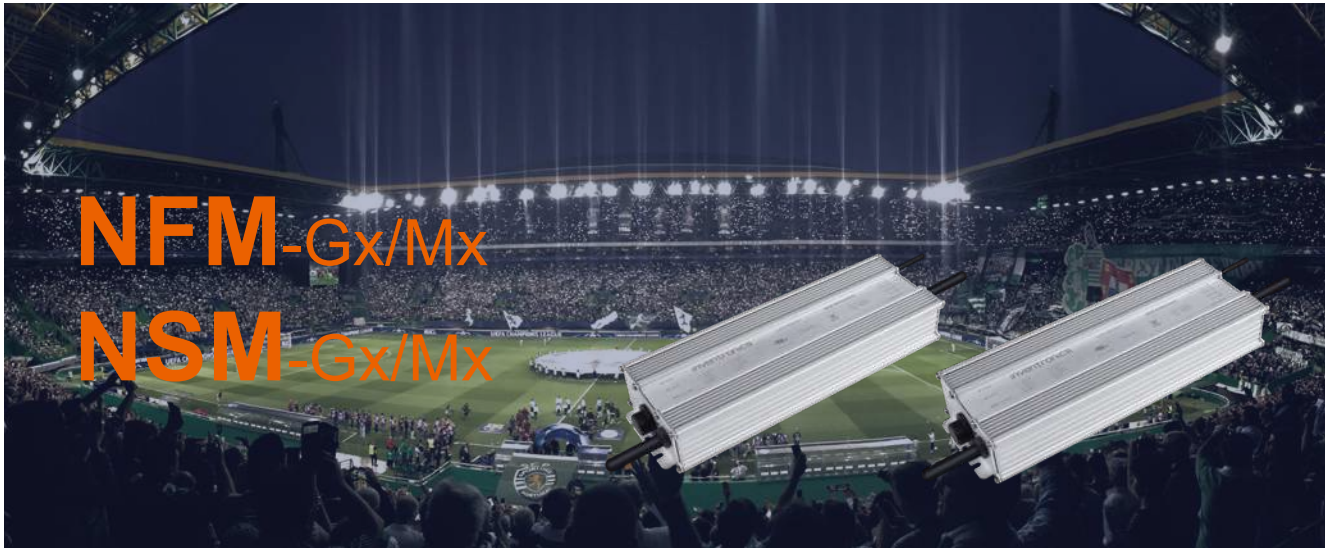

Advantages

- Input Voltage Range: 180 ~ 528Vac (NFM-Gx/Mx), 249 ~ 528Vac (NSM-Gx/Mx)
- Non-Isolated Class I Driver
- No Afterglow
- Ultra High Efficiency (Up to 97.5%)
- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with NFC
- Adjustable Dimming Curve
- Hold Time Adjustable
- Fade Time Adjustable
- Always-on Auxiliary Power: 12Vdc, 250mA (Except DMX-RDM Mode)
- Minimum Dimming Level Supports 0.1% for DALI-2 and DMX-RDM (Gx Models)
- Minimum Dimming Level Supports 1% for 0-10V, PWM, Resistor, and Digital Dimming
- Controls Up to 44 fps
- Integrated Power Metering with High Accuracy Up to ±1%
- Low Inrush Current
- Output Lumen Compensation
- End-of-Life Indicator
- Input Surge Protection: DM 10kV, CM 10kV
- All-Around Protection: OPP, IOVP, IUVP, OVP, SCP, OTP
- IP66 / IP67 and UL Dry / Damp / Wet Location
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- 5-Year Warranty

About NFM-Gx/Mx & NSM-Gx/Mx

The NFM family features a non-isolated design that delivers highly efficient performance. It incorporates an exceptionally wide input range from 180-528Vac and supports multiple dimming methods including DALI-2/D4i, DMX/RDM, 0-10V, and more. Available also for Input Voltage 249-528Vac (NSM-Gx/Mx).

Dimming Functions

- DALI-2 and D4i Certified (Gx Model)
- DALI-2 & DMX-RDM Dimmable & 0-10V & PWM & 3-Timer-Modes Dimmable & Resistor (Gx Model)
- Adjustable 0-10V & PWM & 3-Timer-Modes Dimmable & Resistor (Mx Model)
- INV Digital Dimming, UART Based Communication Protocol

Safety Certifications



NFM-Gx/Mx

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 480Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
500	NFM-500S200Gx/Mx①	1000 ~ 2000	150 ~ 500	96.0%	120,000 Tc=70°C	262(245) × 76.5 × 38.5
680	NFM-680S270Gx/Mx	1360 ~ 2700	150 ~ 500	97.0%	120,000 Tc=70°C	275(256) × 90 × 43.5
880	NFM-880S350Gx/Mx	1760 ~ 3500	150 ~ 500	97.0%	120,000 Tc=70°C	275(253) × 108 × 44.5
1200	NFM-1K2S480Gx/Mx	2400 ~ 4800	150 ~ 500	97.5%	108,000 Tc=70°C	310(288) × 108 × 48.5

NSM-Gx/Mx

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 480Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
680	NSM-680S200Gx/Mx	1360 ~ 2000	150 ~ 500	97.0%	120,000 Tc=70°C	262(245) × 76.5 × 38.5
880	NSM-880S270Gx/Mx	1760 ~ 2700	150 ~ 500	97.5%	120,000 Tc=70°C	275(256) × 90 × 43.5
1200	NSM-1K2S350Gx/Mx	2400 ~ 3500	150 ~ 500	Gx: 97.0% Mx: 97.5%	120,000 Tc=70°C	275(253) × 108 × 44.5
1500	NSM-1K5S480Gx/Mx	3000 ~ 4800	150 ~ 500	97.5%	120,000 Tc=70°C	310(288) × 108 × 48.5

① : x = G are UL Recognized, ENEC and CCC, etc. models; x = T are UL Class P models



Advantages

- Three Independent Output Channels and Independent Dimming
- Independent Dimming and Dim-to-Off
- Power Transfer Settable When 100W Channel is Off Status (1K0D)
- 135W Channel Power Transfer (Optional) (1K2T Model)
- Ultra High Efficiency (Up to 95.0%)
- Input Voltage Range: 249 ~ 528Vac
- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with Programmability
- Maximum Dimming Level with 9V or 10V Selectable
- Fade Time Adjustable
- Always-on Auxiliary Power: 12Vdc, 250mA
- Low Inrush Current
- Output Lumen Compensation
- End-of-Life Indicator
- Input Surge Protection: DM 6kV, CM 10kV
- All-Around Protection: IOVP, IUVP, OVP, SCP, OTP
- Hot-Plugging Protection
- Parallel LED Protection
- IP66 / IP67 and UL Dry / Damp / Wet Location
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- 5-Year Warranty

About ESM-1K0D/1K2T

Inventronics 1000W/1200W products with multiple channels support 2/3-channel luminaires, allowing separate adjustment of current for each channel. These products also offer auxiliary voltage and Dim-to-Off functionality for powering low-voltage wireless controls. Additionally, they feature a power transfer function when a 100W channel is dimmed to off.

Dimming Functions

- Isolated 0-10V/PWM/3-Timer-Modes Dimmable
- INV Digital Dimming, UART Based Communication Protocol
- Dim-to-Off with Standby Power

Safety Certifications



Product Name	Channel	Output Power (W)	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 220Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
ESM-1K0D610Mx ①	1	900	4600 ~ 6100	110 ~ 195	94.5%	119,000 Tc=70°C	349(324) × 144 × 48.5
	2	100	1850 ~ 2100	34 ~ 54			

Product Name	Channel	Output Power (W)	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 480Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
ESM-1K2T570Mx	1	930	4600 ~ 5700	81 ~ 202	95.0%	120,000 Tc=70°C	379(354) × 144 × 48.5
ESM-1K2T570Mx	2	135	1850 ~ 2100	45 ~ 73	95.0%		
ESM-1K2T570Mx	3	135	1850 ~ 2100	45 ~ 73	95.0%		

①： x = G are UL recognized, ENEC, etc. models; x = T are UL recognized, etc. models.



Advantages

- No Afterglow
- Hot-plugging Protection
- Parallel LED Protection
- Ultra High Efficiency (Up to 98.0%)
- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with Programmability
- Isolated 0-10V/PWM/Resistor/3-Timer-Modes Dimmable
- INV Digital Dimming, UART Based Communication Protocol
- Adjustable Dimming Curve
- Dim-to-Off with Standby Power ≤ 0.5W
- Minimum Dimming Level with 5% or 10% Selectable
- Hold Time Adjustable
- Fade Time Adjustable
- Always-on Auxiliary Power: 12Vdc, 250mA
- Low Inrush Current
- Output Lumen Compensation
- End-of-Life Indicator
- Input Surge Protection: DM 6kV, CM 10kV
- All-Around Protection: IOVP, IUVP, OVP, SCP, OTP
- IP66/IP67 and UL Dry/Damp/Wet Location
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- 5 Years Warranty

Dimming Functions

- Isolated 0-10V/PWM/Resistor/3-Timer-Modes Dimmable
- INV Digital Dimming, UART Based Communication Protocol

About NFL-Mx

The NFL-1K0SxxxMx series is a 1000W, constant-current, programmable and IP66/IP67 rated LED driver that operates from 180-528Vac input with excellent power factor. Created for many lighting applications including high mast, sports, UV-LED, aquaculture and horticulture, etc. It provides an auxiliary voltage and dim-to-off functionality for powering low voltage, wireless controls. The dimming control supports 0-10V dimming as well as two-way communication via Digital Dimming, a UART based communication protocol. The high efficiency of these drivers and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against input surge, input under voltage, input over voltage, output over voltage, short circuit, and over temperature.

Safety Certifications



Output Power (W)	Product Name	Adjustable Current Range (mA)	Output Voltage Range (Vdc)	Eff.@ 480Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
1000	NFL-1K0S400Mx	200 ~ 4000	150 ~ 500	98.0%	120,000 Tc = 70°C	328 x 90 x 43.5



Advantages

- Ultra High Efficiency (Up to 97%)
- Non-Isolated Design with Low Residual Output Voltage
- No Afterglow
- Adjustable Output Current (AOC) with Programmability
- Input Voltage Range: 180 ~ 457 Vac
- Always-on Auxiliary Power: 12Vdc, 250mA
- Dim-to-Off with Standby Power ≤0.5W
- Low Inrush Current
- Fade-Time Adjustable
- End-of-Life Indicator
- 5-Year Warranty

1000W Features

- 90mm Width
- Maximum Dimming Level with 9V or 10V Selectable
- Minimum Dimming Level with 5% or 10% Selectable
- INV Digital Dimming, UART Based Communication Protocol
- Isolated 0-10V / PWM / Resistor / 3-Timer-Modes Dimmable
- IP66 / IP67 and UL Dry/Damp/Wet Location
- All-Around Protection: IOVP, IUVP, OVP, SCP, OTP
- Input Surge Protection: DM 6kV, CM 10kV

About NEL

The NEL family is a non-isolated, slim product designed for the horticulture industry and other applications requiring a linear form factor with a wide input voltage range of 180-457Vac. They provide high efficiency to reduce electricity consumption.

400W / 600W Features


- 43mm Width (Mx Model) / 40.5mm Width (MP Model)
- Maximum Dimming Level with 9V or 10V Selectable
- Isolated 0-10V / 10V PWM/Resistor / 3-Timer-Modes Dimmable
- IP65 and UL Dry/Damp Location (MF Model)
- IP66 / IP67 and UL Dry / Damp / Wet Location (MG/MT Models)
- IP20 (MP Model)
- Suitable for Luminaires with Protection Class I
- Input Surge Protection: DM 4 kV, CM 6 kV

Safety Certifications



Output Power (W)	Product Name	Output Current (mA)	Output Voltage Range (Vdc)	Eff.@ 400Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
400	NEL-400S140MP	730 ~ 1400	150 ~ 550	97.0%	102,000 Tc= 70°C	452 × 40.5 × 40
	NEL-400S140Mx ①	730 ~ 1400	150 ~ 550	97.0%	120,000 Tc=70°C	MF: 452(431) × 43 × 38 MG/MT: 462(441) × 43 × 38
600	NEL-600S220Mx	1100 ~ 2200	150 ~ 550	96.5%	103,000 Tc= 70°C	MF: 452(431) × 43 × 38 MG/MT: 462(441) × 43 × 38
1000	NEL-1K0S400Mx	2000 ~ 4000	150 ~ 500	97.5%	114,000 Tc= 70°C	310(291) × 90 × 43.5

① : P = Push Terminals ; x = F are UL Class P, ENEC, CE, etc. models with flying leads; x = G are UL Recognized, ENEC, CE, etc. models; x = T are UL Class P models

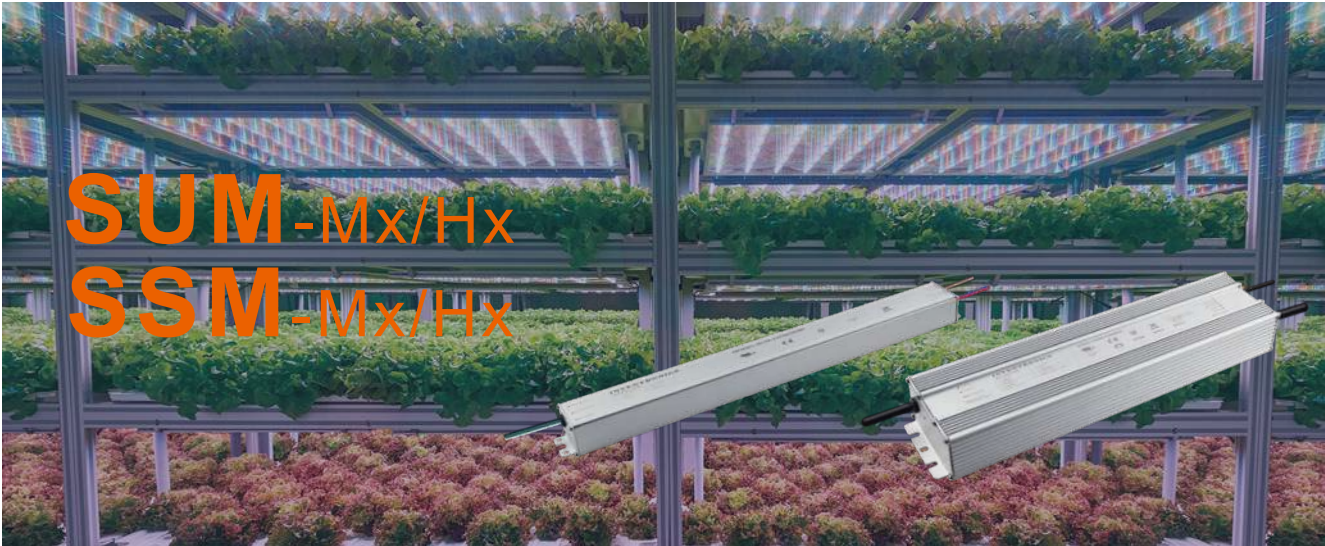

Advantages

- High Efficiency (Up to 96.0%)
- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with Programmability
- Input Voltage Range: 90 ~ 305Vac(SUM-Mx/Hx), 249 ~ 528Vac(SSM-Mx/Hx)
- Fade Time Adjustable
- Output Lumen Compensation
- End-of-Life Indicator
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- Input Surge Protection Up to: DM 6kV, CM 10kV
- 5-Year Warranty

Safety Certifications



110W, 220W, 330W, 440W Features

- 43.5mm Width
- Maximum Dimming Level with 9V or 10V Selectable
- Dim-to-Off with Standby Power ≤ 0.5 W (MF Models)
- Dim-to-Low-Voltage(DTLV) with Standby Power ≤0.5W (HF Models)
- Isolated 0-10V / 10V PWM / Resistor / 3-Timer-Modes
- Always-on Auxiliary Power: 12Vdc, 250mA (MF Models)
- Low Inrush Current (Above 220W)
- IP65 and UL Dry / Damp Location
- All-Around Protection: OVP, SCP, OTP

760W, 1000W, 1500W Features

- 90mm Width
- Maximum Dimming Level with 9V or 10V Selectable
- Minimum Dimming Level with 5% or 10% Selectable
- INV Digital Dimming, UART Based Communication Protocol
- Isolated 0-10V / PWM / Resistor / 3-Timer-Modes
- Always-on Auxiliary Power: 12Vdc, 250mA
- Dim-to-Off with Standby Power ≤ 0.5 W
- Hot-Plugging Protection
- Parallel LED Protection
- IP66 / IP67 and UL Dry / Damp / Wet Location
- All-Around Protection: IOVP, IUVP, OVP, SCP, OTP

About SUM-Mx/Hx

The SUM family encompasses slim products tailored for the horticulture industry and other applications that require a linear form factor and can operate within an input voltage range of 90-305Vac. They provide high efficiency to reduce electricity consumption.

About SSM-Mx/Hx

The SSM family are slim products for the horticulture industry and other applications requiring a linear form factor with an input voltage range of 249-528Vac. They provide high efficiency to reduce electricity consumption.

SUM-Mx/Hx

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 220Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
110	SUM-110S105Mx①HF	700 ~ 1050	80 ~ 157	Mx:91.5% HF:91.0%	120,000 Tc=70°C	MF/HF: 210(186) × 43.5 × 31.5 MG/MT: 220(196) × 43.5 × 31.5
	SUM-110S260Mx/HF	1950 ~ 2600	30 ~ 56	Mx:91.0% HF:90.5%	120,000 Tc=70°C	
220	SUM-220S530Mx/HF	4100 ~ 5300	30 ~ 54	94.0%	120,000 TC=70°C	MF/HF: 296(272) × 43.5 × 31.5 MG/MT: 306(282) × 43.5 × 31.5
330	SUM-330S690Mx/HF	6100 ~ 6900	34 ~ 54	Mx:95.5% HF:95.0%	103,000 TC=70°C	MF/HF: 396(372) × 43.5 × 31.5 MG/MT: 406(382) × 43.5 × 31.5
440	SUM-440S920Mx/HF	8200 ~ 9200	34 ~ 54	94.0%	117,000 TC=70°C	MF/HF: 426(402) × 43.5 × 31.5 MG/MT: 436(412) × 43.5 × 31.5
760	SUM-760S15AMx	14000 ~ 15800	34 ~ 54	95.5%	102,000 Tc=70°C	379(354) × 90 × 48.5
1000	SUM-1K0S400Mx	3200 ~ 4000	175 ~ 312	95.0%	110,000 Tc=70°C	414(389) × 90 × 48.5
	SUM-1K0S840Mx	6720 ~ 8400	84 ~ 149	95.0%	110,000 Tc=70°C	414(389) × 90 × 48.5
	SUM-1K0S21AMx	18500 ~ 21000	34 ~ 54	95.5%	110,000 Tc=70°C	414(389) × 90 × 48.5
1500	SUM-1K5S600Mx	4000 ~ 6000	175 ~ 375	96.0%	104,000 Tc=70°C	489(464) × 90 × 48.5
	SUM-1K5S12AMx	10000 ~ 12500	84 ~ 150	96.0%	104,000 Tc=70°C	489(464) × 90 × 48.5
	SUM-1K5S31AMx	28000 ~ 31500	34 ~ 54	96.0%	104,000 Tc=70°C	489(464) × 90 × 48.5

SSM-Mx/Hx

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 480Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
220	SSM-220S530Mx①/HF	4100 ~ 5300	34 ~ 54	94.5%	116,000 TC=70°C	MF/HF: 336(312) × 43.5 × 31.5 MG/MT: 346(322) × 43.5 × 31.5
330	SSM-330S690Mx/HF	6100 ~ 6900	34 ~ 54	Mx: 95.0% HF: 94.5%	108,000 TC=70°C	MF/HF: 416(392) × 43.5 × 31.5 MG/MT: 426(402) × 43.5 × 31.5
440	SSM-440S920Mx/HF	8200 ~ 9200	34 ~ 54	95.0%	108,000 TC=70°C	MF/HF: 426(402) × 43.5 × 31.5 MG/MT: 436(412) × 43.5 × 31.5
760	SSM-760S15AMx	14000 ~ 15800	34 ~ 54	95.0%	111,000 Tc=70°C	379(354) × 90 × 48.5
1000	SSM-1K0S400Mx	3200 ~ 4000	175 ~ 312	96.0%	100,000 Tc=70°C	414(389) × 90 × 48.5
	SSM-1K0S840Mx	6720 ~ 8400	84 ~ 149	95.5%	100,000 Tc=70°C	414(389) × 90 × 48.5
	SSM-1K0S21AMx	18500 ~ 21000	34 ~ 54	96.0%	100,000 Tc=70°C	414(389) × 90 × 48.5
1500	SSM-1K5S600Mx	4000 ~ 6000	175 ~ 375	96.0%	100,000 Tc=70°C	489(464) × 90 × 48.5
	SSM-1K5S12AMx	10000 ~ 12500	84 ~ 180	95.5%	100,000 Tc=70°C	489(464) × 90 × 48.5
	SSM-1K5S31AMx	28000 ~ 31500	34 ~ 54	96.0%	100,000 Tc=70°C	489(464) × 90 × 48.5

① : x = G are UL Recognized, CE, etc. models; x = T are UL Recognized, CE(built-in-use), etc. models; x = F are UL Recognized, CE(built-in-use) etc. models with flying leads.



Advantages

- Ultra High Efficiency (Up to 96%)
- Full Power at Wide Output Current Range (Constant Power)
- Input Voltage Range: 90 ~ 305Vac(SUM-MGS/MGR), 249 ~ 528Vac(SSM-MGS/MGR)
- Adjustable Output Current (AOC) with Programmability
- INV Digital Dimming, UART Based Communication Protocol
- Minimum Dimming Level with 5% or 10% Selectable
- Maximum Dimming Level with 9V or 10V Selectable
- Fade Time Adjustable
- Always-on Auxiliary Power: 12Vdc, 250mA
- Hot-plugging Protection
- Parallel LED Protection
- Low Inrush Current
- Output Lumen Compensation
- End-of-Life Indicator
- Input Surge Protection: DM 6kV, CM 10kV
- All-Around Protection: IOVP, IUVP, OVP, SCP, OTP
- 5-Year Warranty

SUM-MGS/SSM-MGS Version Features

- Panel Mount Connectors Facilitate Installation
- IP66/IP67 and UL Dry/Damp/Wet Location
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location

SUM-MGR/SSM-MGR Version Features

- Mount Connectors Facilitates Installation
- Rotary Switch+RJ12 Connector
- IP66 and UL Dry/Damp/Wet Location

About SUM-MGS/MGR & SSM-MGS/MGR

The SUM-MGS/MGR series is a constant-current, program-mable LED driver that operates from 90-305Vac input designed for many lighting applications, including high mast, sports, UV-LED, aquaculture, horticulture, etc. It provides panel mount connectors to facilitate installation. It offers a rotary switch, RJ12 connector, and dim-to-off functionality. The dimming control supports 0-10V dimming and two-way communication via Digital Dimming, a UART-based communication protocol. The high efficiency of these drivers and compact metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure a trouble-free operation, protection is provided against input surge, input under-voltage, input over-voltage, output over-voltage, short circuit, and over-temperature. Available also for Input Voltage 249-528Vac (SSM-MGR/MGS).

Dimming Functions

- Isolated 0-10V/PWM/Resistor/3-Timer-Modes Dimmable
- Dim-to-Off with Standby Power ≤ 0.5W

Safety Certifications



SUM-MGS/MGR

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 220Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
760	SUM-760S15AMGS	14000 ~ 15800	34 ~ 54	95.5%	102,000 Tc=70°C	415(390) × 108 × 48.5
	SUM-760S15AMGR	14000 ~ 15800	34 ~ 54	95.5%	102,000 Tc=70°C	415(390) × 108 × 48.5
1000	SUM-1K0S400MGS	3200 ~ 4000	175 ~ 312	95.0%	110,000 Tc=70°C	450(425) × 108 × 48.5
	SUM-1K0S840MGS	6720 ~ 8400	84 ~ 149	95.0%		
	SUM-1K0S20AMGS	18500 ~ 20000	34 ~ 54	95.5%		
	SUM-1K0S400MGR	3200 ~ 4000	175 ~ 312	95.0%	110,000 Tc=70°C	450(425) × 108 × 48.5
	SUM-1K0S840MGR	6720 ~ 8400	84 ~ 149	95.0%		
	SUM-1K0S20AMGR	18500 ~ 20000	34 ~ 54	95.5%		

SSM-MGS/MGR

Output Power (W)	Product Name	Full-power Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 480Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
760	SSM-760S15AMGS	14000 ~ 15800	34 ~ 54	95.0%	111,000 Tc=70°C	415(390) × 108 × 48.5
	SSM-760S15AMGR	14000 ~ 15800	34 ~ 54	95.0%	111,000 Tc=70°C	415(390) × 108 × 48.5
1000	SSM-1K0S400MGS	3200 ~ 4000	175 ~ 312	96.0%	100,000 Tc=70°C	450(425) × 108 × 48.5
	SSM-1K0S840MGS	6720 ~ 8400	84 ~ 149	95.5%		
	SSM-1K0S20AMGS	18500 ~ 20000	34 ~ 54	96.0%		
	SSM-1K0S400MGR	3200 ~ 4000	175 ~ 312	96.0%	100,000 Tc=70°C	450(425) × 108 × 48.5
	SSM-1K0S840MGR	6720 ~ 8400	84 ~ 149	95.5%		
	SSM-1K0S20AMGR	18500 ~ 20000	34 ~ 54	96.0%		

PU-10Kx05KBxA



■ Features

- 90-305Vac Working Input Voltage
- Uoc=10kV & In=5kA
- Certified for both EN 61643-11 - T2 & T3
- Protection Mode for TN, TT and IT-Systems
- Available for Series & Parallel Installation
- Available for Class I & Class II luminaires
- Double Thermally Protected
- End-of-life LED Indicator
- High Temperature, 85°C Maximum Surface Temp
- Input Over Voltage Protection at 440Vac with 48 Hours
- IP66 / IP67

PU-20Kx10KTxx



■ Features

- Compatible with Inventronics LED Drivers
- 90-305Vac Working Input Voltage
- 15 kA Maximum, 10 kA Nominal (15 strikes) Surge Current Rating Using Industry Standard 8/20µs Wave
- UL1449 Type 4, EN 61643-11 – Surge Protective Devices T2 & T3
- IEEE C62.41.2 Location Category C High
- High Temperature, 85 °C Maximum Ambient
- Flameproof Plastic Enclosure
- IP66

PU-20KS10KHT



■ Features

- Compatible with Inventronics LED Drivers
- 90-305Vac Working Input Voltage
- DM, CM Surge Protection Mode
- Maximum Discharge Current (Imax) 20kA, 8/20µs
- Nominal Discharge Current (In) 10kA, 8/20µs
- UL1449 Type 5 Recognized Component
- IEEE C62.41.2 Location Category C High Exposure
- High Temperature, 85°C Maximum Surface Temp Rating

PS-20KS10KHT



■ Features

- Compatible with Inventronics LED Drivers
- 249-528Vac Working Input Voltage
- DM, CM Surge Protection Mode
- Maximum Discharge Current (Imax) 20kA, 8/20µs
- Nominal Discharge Current (In) 10kA, 8/20µs
- UL1449 Type 5 Recognized Component
- IEEE C62.41.2 Location Category C High Exposure
- High Temperature, 85°C Maximum Surface Temp Rating

SPD G3



■ Features

- Mains Voltage to 320Vac
- Suitable for Luminaries of Protection Class I/II
- Fully LED Driver Protection by Up <2kV
- High Surge Protection of Up to 20 kV / 10 kA (L-N); Comply with IEC 61643-11 - T3
- Maximum Surge Protection of Up to 20 kA; Comply with IEC 61643-11 - T2
- TÜV Approved Acc. to IEC 61643-11 – T2 & T3
- IP20 (SPD G3)
- IP65 (SPD P5 G3)



Advantages

- 2 standard color mixes recipes for different applications
- Module efficacy: up to 3.6 μmol/J (@rated conditions)
- PF up to 85 μmol/s (@rated conditions)
- Average lifetime (L90B10): up to 70,000 (up to temperature at Tp = 60 °C)
- Thermal protection by NTC on the LED Module
- Maximum working voltage 550 V for the system
- Geometry according to Zhaga Book 15
- Customized solutions (color-mix & form factor) possible
- Perfect fit to OPTOTRONIC HC and Industry Drivers
- Compatible to standard outdoor and industry optics, e.g. Ledil Strada series

Safety Certifications



Product Name	EAN
PlantaSeed R90B10	4062172242394
PlantaSeed R30W70	4062172242417

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- 5-year system warranty when paired with OPTOTRONIC constant current LED power supplies
- 120° viewing angle per module
- Available module length: 1 ft/280 mm or 2 ft/560mm
- Dimensions: 280 mm or 560 mm x 20 mm x 6 mm
- Dimmable by OPTOTRONIC LED driver
- For operation with suitable OPTOTRONIC control gears
- Geometry according to Zhaga Book 7 L28W2 and L56W2
- Lifetime (L85 B10): up to 60,000 h (temperature at tc = 80 °C)
- Max. working voltage: 250 V
- Max. working voltage: 60 V (to be operated only on SELV LED control gear)
- PF up to 80 μmol/s (@rated conditions)
- Adjustable luminous flux, efficacy and lifetime
- Future-proof thanks to Zhaga conformity
- High homogeneity thanks to small LED pitch
- Optimized LED layout to deliver uniform light output
- Perfect fit to OPTOTRONIC HC and Industry Drivers
- SELV or non-isolated modules for easy luminaire design
- System guarantee in combination with OPTOTRONIC control gear and match with other driver portfolio
- Type of protection: IP00

Safety Certifications



Product Name	EAN
Planta Seed PL-LIN-RW 280x20 LV/HV	4062172356855
Planta Seed PL-LIN-RWFR 280x20 LV/HV	4062172356879
Planta Seed PL-LIN-RW 560x20 LV	4062172356893
Planta Seed PL-LIN-RW 560x20 HV	4062172356916
Planta Seed PL-LIN-RWFR 560x20 LV	4062172356930
Planta Seed PL-LIN-RWFR 560x20 HV	4062172356954

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Light is robust!

Ensure your warehouses, manufacturing plants, and logistics hubs can operate with adaptable illumination for precision and safety working conditions while minimizing maintenance and energy costs. Benefit from robust, efficient and lasting lighting solutions from Inventronics for your industrial application!

Expertise

Select our globally available and complete set of rugged LED modules, smart drivers, controls and sensors for your lighting solutions, designed for:



Visual comfort, energy efficiency & control



Harsh conditions & durability




Easy / reduction of maintenance

System Value

- Extended reliability with system approach, built on fully tested, highly reliable components.
- System designed for higher efficiency & durability.
- Tested component interoperability, including LED modules, smart drivers, sensors, and controls.
- Outstanding lighting control, from comfortable switching and dimming, group and scenes control, until daylight harvesting.
- Enhanced monitoring options for energy consumption, voltage peaks or residual lifetime, remotely accessible via cloud.
- Fastest pre-installation programming & user-friendly on-site commissioning.

Lighting System Solutions

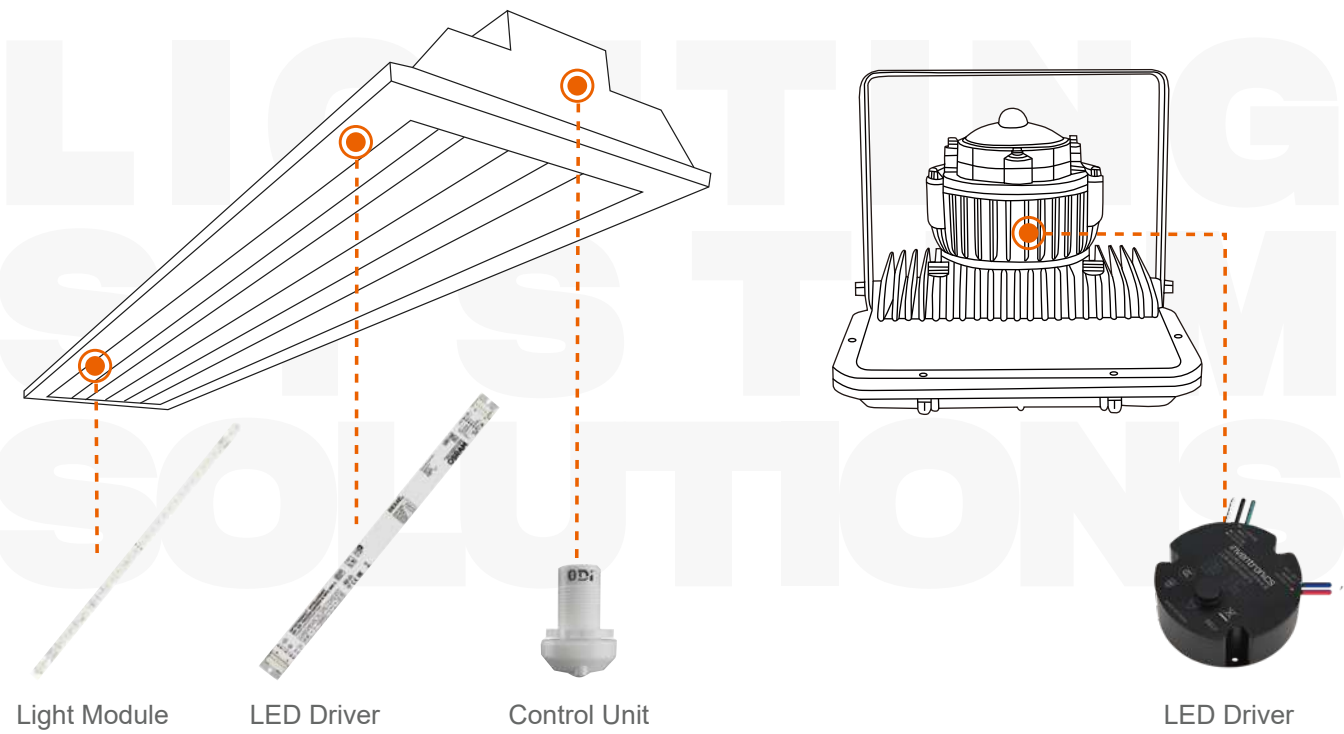

Sub-applications



Production Factories

Logistics and Warehouses


Indoor Transportation

Refineries

Steel Production

Mining

Inventronics Cases

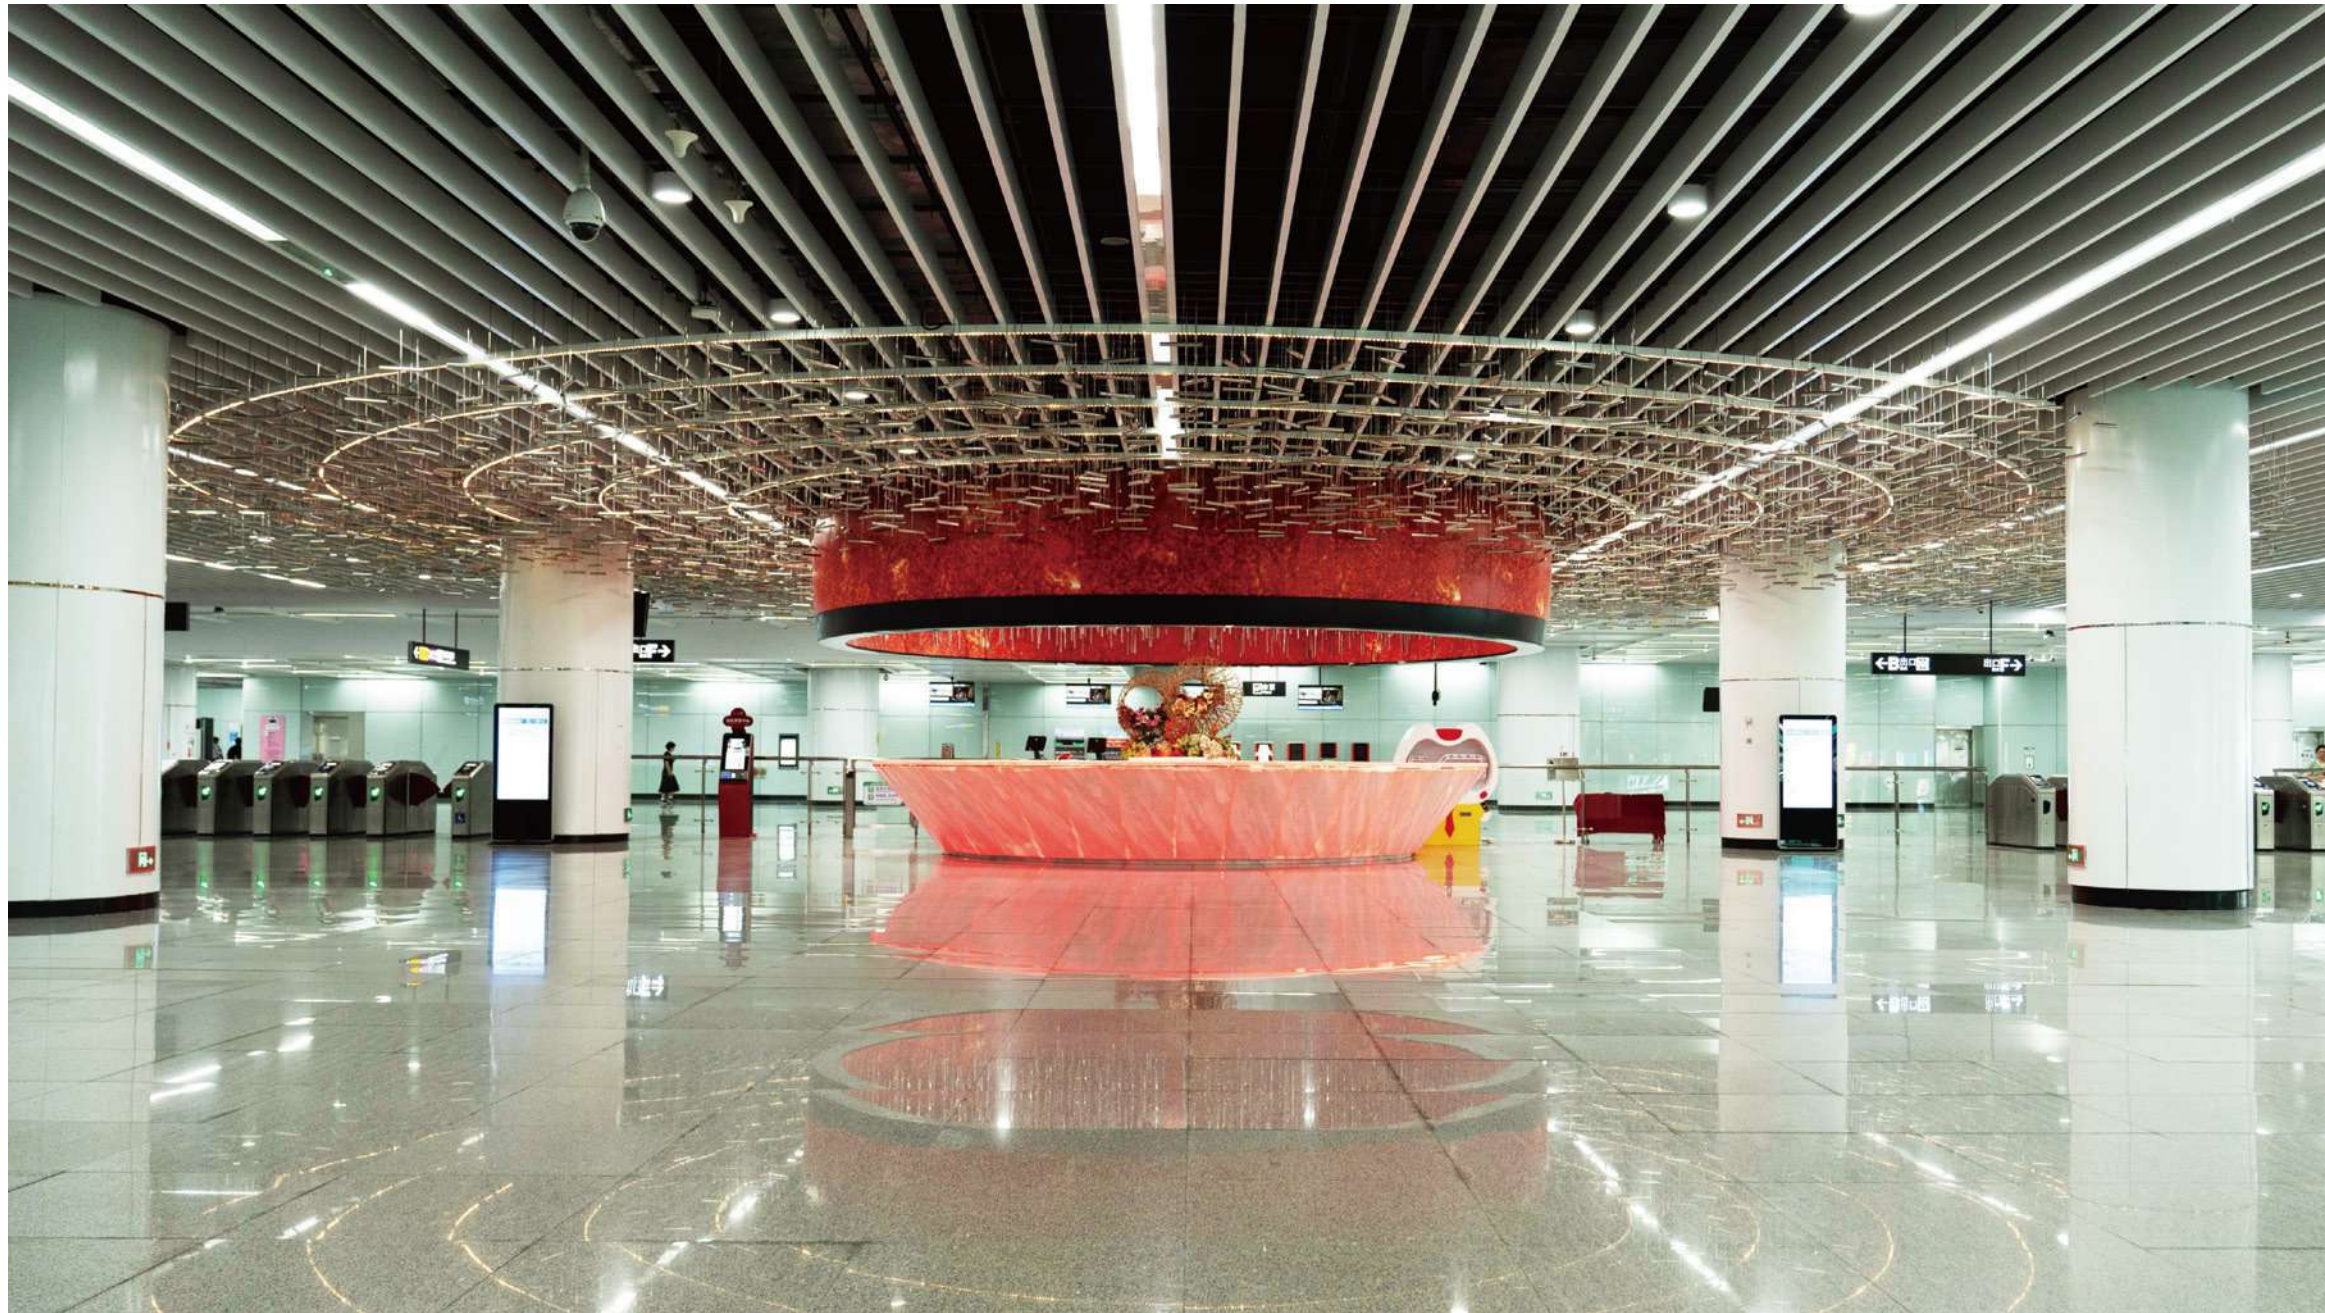

The longest metro loop
in South China.
**Guangzhou Metro
Line 11, China**



01 Controls, Sensors, Programming Tools & Accessories

1.1 DALI	Controllers	DALI PRO 2 IoT	107
		DALI ECO BT RTC	108
	Sensors	DALI-2 SENSOR LS/PD HB LI	109
	Converters / Actuators	DALI-2 REP LI	110
1.2 Bluetooth NLC	Converters / Sensors	Bluetooth NLC D4i Module Indoor	111
		Bluetooth NLC 0-10 Module Indoor	112
		Bluetooth NLC 220-240 LS/PD CI	113
1.3 Software		Tuner4TRONIC	114
		DALI PRO PC Tool	114
		DALI Wizard	114
		BT Config	114
		DALI PRO CONTROL	114
		BT CONTROL	114
		HubSense Commissioning	114
1.4 Programming Tools		PRG-MUL2	115
		PRG-NFC-H	115
		PRG-NFC-D2	115
		DALI magic	115
1.5 Converters		CNV-DALI2	115

02 LED Driver & Accessories

2.1 Connected - Constant Current	OT WI D NFC BL L	116
	OTi DALI N BFC L HE	117
	OTi DX D NFC IND L	118
	OTi DALI D NFC IND L	119
2.2 Simple DIM - Constant Current	IT DIM HF LS/PD KIT	120
	IT DIM CS L	121
	LUM-MTx	122
	EUM-DF	123
2.3 Non Dimmable - Constant Current	EM P7 G2	124
	OT FIT N NFC L HE	125
	EM FIT (N) CS L	126
	EM FIT N CS L CCT	127
	OT FIT D NFC IND L	128

2.4 Accessories	PU-10Kx05KBxA	129
	PU- 20Kx10KTxx	129
	PU- 20KS10KHT	129
	PS-20KS10KHT	129
	SPD G3	130
	PU-20Kx10KWPA	130

03 Light Modules & Accessories

3.1 Rigid - Linear & Area	PrevaLED Linear IND G1	131
	PrevaLED Linear G6	132
	PrevaLED Brick	133





Advantages

- DALI-2 certified
- IoT ready with built-in gateway for remote data access
- Easy browser-based commissioning UI and Professional Software available
- Small form factor: only 6 TE (DIN rail)
- Commissioning via Ethernet/WLAN
- DALI-2 certified for improved multi-vendor interoperability
- Template based onsite commissioning via Smart device
- Building Management System integration via optional KNX interface
- Remote access for changes in the configuration from every location
- LAN Interconnect to connect up-to 8 Controllers into one network
- Rest API for connection of a 3rd party Cloud with the DALI Pro2 IoT Controller
- Automated testing and reporting of emergency lighting installations
- Daylight Simulation via scene recall and/or light sensor regulation

Safety Certifications



Product Name	EAN
DALI PRO 2 IOT	6977078993692

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Compact light control with DALI interface
- Smart phone connection via Bluetooth® to control and configure
- Integrated clock for time based control of brightness and color temperature (HCL)
- Adaptable HCL curve with up to 24 points
- One DALI output channel (Broadcast or Groupcast)
- Up to 32 DALI luminaires connectable
- Supports up to 4 DALI sensors and pushbutton couplers
- Daylight-dependent regulation and presence-dependent control of light
- Pushbutton interface to separately control brightness and color temperature
- Daytime depending change of brightness and color temperature (HCL)
- Suitable for Human Centric Lighting Applications (HCL) Control the light via Smartphone
- Adjustment of all settings via smartphone
- Up to 4 timers with ON-/OFF-Time and weekday configurable
- Simplified startup thanks to predefined operation modes
- Intuitive manual dimming, switching and changing of colour temperature
- Up to 4 groups separatly controllable
- Adjustable Offset for different groups
- Easy Scene creation via App
- Firmware update over-the-air via Bluetooth possible
- Integrated DALI supply
- Control of standard white or Tunable White light acc.
- DALI device type 8 (DT8)
- Selected DALI parameters changeable via APP

Safety Certifications



Product Name	EAN
DALIECO BT RTC CONTROL	6977078993753

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Light and motion sensor for luminaire installation
 - Motion detection via passive IR element
 - Light sensor operating range: 5 ~ 2000 lx (measured at sensor)
 - Detection height up to 17 m
 - Function indicator LED
 - Intended for installation into a standard ½" knockout
- Design freedom due to compact size
 - Protection Class IP65 (In installed condition)
 - Easy to integrate in luminaire
 - DALI-2 certified
 - DALI Bus powered (No mains connection necessary)
 - Multiple sensors connectable to the same DALI line
 - Shutter included to optimize sensor detection
 - Integreatable in light- and building management systems supporting DALI-2 sensors

Product Name	EAN
DALI-2 SENSOR LS/PD HB LI	6977078993791

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Expansion of DALI systems by 64 DALI control gears each time
- Extends the DALI line by 300 m
- Maximum power consumption in stand-by mode: 1 W
- Four versatile operating modes: Basic, Group, Extend, Touch DIM
- Basic mode: DALI-2 certified DALI converter for grouping up to 64 standard DALI driver
- Group mode: Groups up to 64 DALI drivers and up to 5 Inventronics DALI-2 sensors
- Group mode: Supports standard DALI drivers and DALI-DT8 drivers (TW / RGB (W))
- Touch DIM mode: Simple switching and dimming of up to 64 drivers.
- Powerful power supply: 130 mA DALI bus power supply
- Can be addressed via DALI

Safety Certifications



Product Name	EAN
DALI-2 REP LI	6937186116437

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Bluetooth NLC D4i Module Indoor

Advantages

- With/without Daylight and Occupancy Sensor D4i Module
- Bluetooth NLC enabled by Silvair
- Control of D4i drivers or DALI drivers with additional DALI bus power supply
- Intended for installation into a standard ½" knockout
- Works with Hubsense®
- Standard communication protocol released by Bluetooth SIG
- Design freedom due to compact size
- Easy to integrate in luminaire
- Minimize internal wiring in combination with D4i drivers
- Secured product communication granted by ioXT and PSA Certificates

Safety Certifications



Product Name	EAN
B NLC D HB LI	6977078990363
B NLC D LI R	6977078990387
B NLC D MB LI	6977078990448
B NLC D LB LI	6977078990462
B NLC D OF LI BK	6977078993425
B NLC D OF LI S	6977078997041
B NLC D OF LI	6977078997553

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Bluetooth NLC 0-10 Module Indoor

Advantages

- Design freedom due to compact size
- Easy to integrate in luminaire
- Minimize internal wiring in combination with 0-10V LED drivers
- With/without Daylight and Occupancy Sensor
- Bluetooth NLC
- Control of 0-10V LED drivers
- Works with Inventronics Hubsense

Safety Certifications



Product Name	EAN
B NLC A OF LI	6937186115959
B NLC A HB LI	6937186115973
B NLC A LI R	6937186115997

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Presence detection via passive IR element
- Detection height up to 4 meter
- Bluetooth NLC enabled by Silvair
- Suitable for up to 16 DALI-2 LED drivers (Part - 207) in broadcast mode
- Ambient light dependent control and presence detection
- Shutter included to optimize sensor detection
- Simplified mounting for flush device boxes
- Large motion detection range

Safety Certifications



Product Name	EAN
B NLC 220-240 LS/PD CI	6977078990400

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



SOFTWARE

Software

Overview

Inventronics offers a comprehensive range of professional software solutions to support and configure its components.



T4T



Apps



Tuner4TRONIC

A software suite for OEMs that enables the configuration of all programmable OPTOTRONIC, ICUTRONIC, QUICKTRONIC, and POWERTRONIC LED drivers during the luminaire manufacturing process.



DALI PRO PC TOOL

Software for configuring DALI installations in combination with the DALI PROFESSIONAL control unit DALI PRO C-4 RTC or DALI PRO 2 IoT. DALI PRO 2 IoT is an innovative lighting management control technology for the IoT era.



DALI Wizard

A GUI tool for setting up, analyzing, and diagnosing DALI ECG installations, used in combination with the DALI Wizard control device.



BT Config

An app that offers standalone component detection and automatic light calibration, eliminating the need for manual commissioning and adjustments of daylight-dependent controls.



DALI PRO CONTROL

With just a simple tap, you can easily control complex lighting scenarios: turn lights on or off, adjust brightness, change colors, or modify color temperature.



BT CONTROL

Allows the control of DALI-enabled luminaires via a smartphone, including light level and color temperature adjustments, as well as the storage of individual lighting scenes.



HubSense Commissioning

The “HubSense Com” app is a tool to carry out configurations and to test light settings for the installer and the system integrator in order to intuitively commission on site Bluetooth Mesh components (QBM), which are qualified according to the standard.

PROGRAMMING TOOLS

Programming Tools



PRG-MUL2
Features

- Programmer for All Inventronics DALI and 0-10V Programmable Drivers
- Offline Programming Capability
- Automatic Programming Mode



PRG-NFC-H
Features

- For Use with Inventronics NFC Enabled Drivers
- Zhaga Book 24 Compliant
- USB Powered
- IP30
- Connects to Inventronics Multi-Programmer Software



PRG-NFC-D2
Features

- For Use with Inventronics NFC Enabled Drivers
- Zhaga Book 24 Compliant
- USB Powered
- IP42
- Connects to Inventronics Multi-Programmer Software



DALI magic
Features

- USB DALI converter for Tuner4TRONIC and DALI wizard software for Windows PC
- Pushbutton to test DALI dimming without need of connection to computer
- Powered by USB or by included universal power supply
- Integrated automatic DALI supply of up to 64 devices (up to 4 if powered by USB)

CONVERTERS

Converters

DALI-2
CNV-DALI2
DALI-2 Stadium/Stage Lighting Management Solutions



Features

- Convert DALI-2 Signal to 0/1-10V Dimming Signal
- Comply with DALI-2 Protocol
- Powered By Auxiliary Power with 3-Wire Connection to Driver





Advantages

- Qualified Bluetooth mesh enabled by Silvair
- Supply voltage: 220 ~ 240 V
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Line voltage: 198 ~ 264 V
- Lifetime: up to 100,000 h
- Type of protection: IP20
- Non-isolated drivers
- Versatile QBM window driver up to 100 W and 750 mA
- Fully programmable via software (NFC)
- Very high efficiency
- High-quality dimming of 1 ~ 100 % (amplitude and/or PWM selectable by software)
- Higher quality of light thanks to < 1% output ripple current
- Fulfils safety requirement due to overload, overtemperature
- Hot Plug protection

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal output current (mA)	Nominal output voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186112057	OT Wi 35/220-240/400 D NFC BL L	4 ~ 38	75 ~ 400	54 ~ 240	92%	280 x 30 x 21
6937186112071	OT Wi 75/220-240/550 D NFC BL L	6.5 ~ 75	125 ~ 550	54 ~ 240	93%	280 x 30 x 21
6937186112095	OT Wi 100/220-240/750 D NFC BL L	5.4 ~ 100	100 ~ 750	54 ~ 260	94%	280 x 30 x 21

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Input voltage: 220 ~ 240Vac
- Wide Output current range
- Fully programmable DALI/NFC
- Low THD <5% @ full load
- Wide ambient temp range
- Support DALI parts -251, -252, -253
- Wide output voltage range
- CLO – Constant Lumen Output
- Very high efficiency up to 96%
- 100'000 h lifetime at max tc
- 5 years guarantee
- Suitable for Emergency Lighting
- Improved Efficiency and Power factor at partial loads
- One version to mach multiple power applications with improved product performance and drivers per Circuit Braker, reducing the need of various SKUs. The 75W version can be used to replace 75/60/35/25W applications with equivalent or better performance. Same for 150W version to match 150/100/90W ones.
- Wide operating range adjustable via DALI or NFC
- CLO integrated for maximizing energy savings
- Small, slim white metal housing
- Programmable Hybrid dimming 1 ~ 100%

EAN	Product Name	Output Power (W)	Adjustable Current Range (mA)	Output Voltage (Vdc)	Eff. @220Vac	Dimensions (L×W×H)(mm)
6937186150226	OTi DALI 75/220-240/550 N NFC L HE	3 ~ 75	35 ~ 550	54 ~ 240	96%	280 x 30 x 16
6937186150240	OTi DALI 150/220-240/1A0 N NFC L HE	6 ~ 150	100 ~ 1000	54 ~ 300	96%	360 x 30 x 21

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

About OTi DALI N NFC L HE

OPTOTRONIC Linear DALI, Non-isolated, High Efficiency Power Supply is the ideal choice for linear and area fixtures for office - industrial - shop lighting requiring very high conversion efficiency, extended operative window with excellent Harmonic Distortion and Power Factor in all working conditions, dimmable via DALI interface including parts 251,252,253 for monitoring Luminaire, Energy and Diagnostic data.

Dimming Functions

DALI-2

Safety Certifications



Advantages

- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Versatile scope of application due to output power range of up to 150 W
- Monitoring of luminaire operating parameters
- Supply voltage: 220 ~ 240 V
- Available with output current range: up to 850 mA
- Constant Lumen Output (CLO)
- Integrated customizable thermal management (Driver Guard)
- Non-isolated drivers
- Versatile non-isolated DEXAL LED driver up to 150 W due to flexible output characteristic
- Integrated DEXAL Bus power supply for sensors and wire-less radios
- Simplified luminaire design for wireless lighting control system and sensors
- Locking and unlocking of luminaire/driver data
- Advanced luminaire/driver data (power, energy, operating hours...) for analytics
- Prepared for DiiA Specification Parts -250, -251, -252 and -253
- Fully programmable via T4T software (NFC, DALI Interface)
- Lifetime: up to 100,000 h (temperature at Tc = 75 °C)
- High light quality: 1 ~ 100% amplitude dimming
- Wide operating temperature range: -40 ~ +65 °C
- High surge protection: up to 4 kV (L-N) / 4 kV (L/N-PE)
- Integrated inrush current limiter
- Very high efficiency (up to 96%)

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal output current (mA)	Nominal output voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186111890	OTi DX 100/220-240/700 D NFC IND L	23 ~ 100	200 ~ 700	64 ~ 300	93%	425 x 30 x 21
6937186111913	OTi DX 150/220-240/850 D NFC IND L	43 ~ 150	250 ~ 850	64 ~ 300	95%	425 x 30 x 21

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Line frequency: 0 Hz | 50 Hz | 60 Hz
 - Versatile scope of application thanks to an output power range of up to 300 W
 - Supply voltage: 220 ~ 240 V
 - Available with output current range: up to 1,000 mA
 - Constant Lumen Output (CLO)
 - Integrated customizable thermal management (Driver Guard)
 - Non-isolated drivers
 - DALI-2 certified (Part -251, -252, -253)
- Fully programmable via T4T software (NFC, DALI Interface)
 - Lifetime: up to 100,000 h (temperature at Tc = 75 °C, max. 10 % failure rate)
 - High light quality: 1 ~ 100% amplitude dimming and 1% output ripple current
 - Wide operating temperature range: -40 ~ +55 °C
 - High surge protection: up to 4 kV (L-N) / 4 kV (L/N-PE)
 - Very high efficiency (up to 96%)
 - Fulfill safety requirement due to overload, overtemperature
 - Hot Plug protection
 - Touch DIM® application: easy to control via pushbutton
 - Suitable for emergency Installations (acc. to EN 60598-2-22 and IEC 61347-2-13, appendix J) thanks to DC detection (0 Hz, pulsating DC), on/off switchable

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal output current (mA)	Nominal output voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770436589	OTi DALI 75/220-240/550 D NFC IND L	8.0 ~ 75	125 ~ 550	64 ~ 300	94%	360 x 30 x 21
6977770436503	OTi DALI 100/220-240/700 D NFC IND L	28 ~ 100	200 ~ 700	64 ~ 300	94%	360 x 30 x 21
6977770436527	OTi DALI 150/220-240/1A0 D NFC IND L	43 ~ 150	250 ~ 1000	64 ~ 300	95%	425 x 30 x 21
6977770436626	OTi DALI 150/220-240/700 D NFC IND L	43 ~ 150	200 ~ 700	64 ~ 260	94%	360 x 30 x 21
6977770436602	OTi DALI 300/220-240/1A6 D NFC IND L	80 ~ 300	250 ~ 1550	60 ~ 300	96%	360 x 45 x 28

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Flexible with 1 driver offers 4 output currents
 - Low THD 10% @ full load
 - Input voltage: 220 ~ 240 VAC
 - Ambient temp range ta: -25 to +50 °C
 - Low LF-ripple 5%
 - 5 years guarantee
 - Non-isolated drivers
 - HF LI Sensor (Light- and motion detection via radar)
 - StepDIM function for different light levels
 - Different operating modes for daylight- or motion-dependent switching selectable
 - Motion detection range adjustable
 - Detection height up to 6 meter
- KIT including driver, HF Sensor and cabling
 - Non isolated system for energy saving applications
 - High quality light with very low ripple
 - Very high efficiency
 - Enable slim fixture design with flat 21 mm height metal housing
 - Long lasting and high reliability

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal output current (mA)	Nominal output voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186111777	IT DIM 40/HF LS/PD KIT	8 ~ 42	200 ~ 350	40 ~ 120	86.5%	210 x 30 x 21
6937186111791	IT DIM 60/HF LS/PD KIT	18 ~ 61.3	201 ~ 350	90 ~ 175	92%	280 x 30 x 21
6937186111814	IT DIM 75/HF LS/PD KIT	31.5 ~ 75.6	202 ~ 350	90 ~ 216	93%	280 x 30 x 21

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





IT DIM CS L

Advantages

- Class P / 2 family in 40 / 60 and 75W
- 5-100% dimming incl. dim to off
- Dipswitches for current setting (4)
- low flicker index below 5%
- wide ta range -25 ~ +50°C
- 100'000 hours lifetime @ Tc65
- UL and CB approved
- 5 years guarantee

Dimming Functions

0-10V / PWM dimming

EAN	Product Name	Nominal output power (W)	Nominal output current (mA)	Nominal output voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977078994958	IT DIM 40/120-277/800 CS L	40	500 ~ 800	27 ~ 54	85%	210 x 30.21
6977078994972	IT DIM 60/120-277/1A2 CS L	60	900 ~ 1200	27 ~ 54	86%	280 x 30.21
6977078994996	IT DIM 75/120-277/1A6 CS L	75	1300 ~ 1600	27 ~ 54	87%	280 x 30.21

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

Safety Certifications



LUM-MTx

Advantages

- Power Level: 20W, 25W, 30W, 40W, 85W
- Input voltage 120 ~ 277V
- Surge: 2 / 4 kV
- IP Rating: IP20
- Dimming: 1% dimming capability with Dim to Off | 0-10V /
- PWM dimming
- 1% dimming capability with Dim to Off
- Programming via Inventronics PC programmer / Tuner4TRONIC
- Very low ripple for high lighting quality
- 12V Aux included
- Long lasting and high reliability
- UL Class 2

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal output current (mA)	Nominal output voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186100146	LUM-020S100MTF	20	100 ~ 1050	10 ~ 55	85%	280 x 29 x 26
6937186100184	LUM-025S130MT	25	100 ~ 1300	10 ~ 56	82%	126 x 60.1 x 24
6937186100160	LUM-025S130MTG	25	100 ~ 1300	10 ~ 56	82%	126 x 60.1 x 24
6937186100085	LUM-030S100MTF	30	100 ~ 1050	10 ~ 55	85%	280 x 29 x 26
6937186100207	LUM-040S150MT	40	300 ~ 1500	10 ~ 56	84%	126 x 60.1 x 24
6937186100221	LUM-040S150MTG	40	300 ~ 1500	10 ~ 56	84%	126 x 60.1 x 24
6937186100108	LUM-050S140MTF	50	400 ~ 1400	10 ~ 55	86%	280 x 29 x 26
6937186100122	LUM-085S240MTF	85	700 ~ 2400	10 ~ 55	91%	424 x 30 x 26

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Input Voltage Range: 90 ~ 305Vac
- Full Power at Wide Output Current Range (Constant Power)
- Adjustable Output Current (AOC) with Programmability
- Output Lumen Compensation
- End-of-Life Indicator
- Input Surge Protection: DM 6kV, CM 10kV
- All-Around Protection: OVP, SCP, OTP
- IP66 and UL Dry/Damp Location
- TYPE HL, for Use in a Class I, Division 2 Hazardous (Classified) Location
- 5 Years Warranty

Dimming Functions

- Isolated 1-8V/10V PWM/3-Timer-Modes Dimmable
- Adjustable Dimming Curve
- Override Dimming

Safety Certifications



Output Power (W)	Product Name	Adjustable Current Range (mA)	Output Voltage Range (Vdc)	Eff.@ 220Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
180	EUM-180S125DF	105 ~ 1250	67 ~ 190	93%	109,000 Tc=70°C	240.5(171) × 60 × 37.6

About EUM-DF

The EUM-180S125DF series is a 180W, constant-current, programmable IP66 LED driver that operates from 90-305Vac input. It is drop-in compatible to the popular 180W F-Can form factor from Signify Advance and Acuity EldoLED. The aluminum extruded case and fully potted design provides superior thermal performance and extended lifetime. Perfect for Outdoor Street and Area Lighting, as well as Indoor Industrial High Bay Lighting, and a great alternative upgrade to the popular 180W F-Can drivers.



Advantages

- High efficiency up to 96%
- Input Voltage Range: 108 ~ 305Vac
- Fix output of 700mA
- Long life time
- Input Surge Protection: DM 6kV, CM 6kV
- Suitable for Luminaires with Protection Class I
- IP67


Dimming Functions

Not relevant

Safety Certifications



Output Power (W)	Product Name	Adjustable Current Range(mA)	Output Voltage Range (Vdc)	Eff.@ 220Vac	Lifetime (hours)	Dimensions (L×W×H)(mm)
100	EM 100/120-277/700 P7 G2	700	100 ~ 143	93.5%	50,000 Tc=75°C	143.5 x 56 x 33
150	EM 150/120-277/700 P7 G2	700	150 ~ 215	94.5%	50,000 Tc=75°C	143.5 x 56 x 33
200	EM 200/120-277/700 P7 G2	700	200 ~ 285	95.5%	50,000 Tc=75°C	150.5 x 56 x 33
240	EM 250/120-277/700 P7 G2	700	240 ~ 343	96.0%	50,000 Tc=75°C	150.5 x 56 x 33

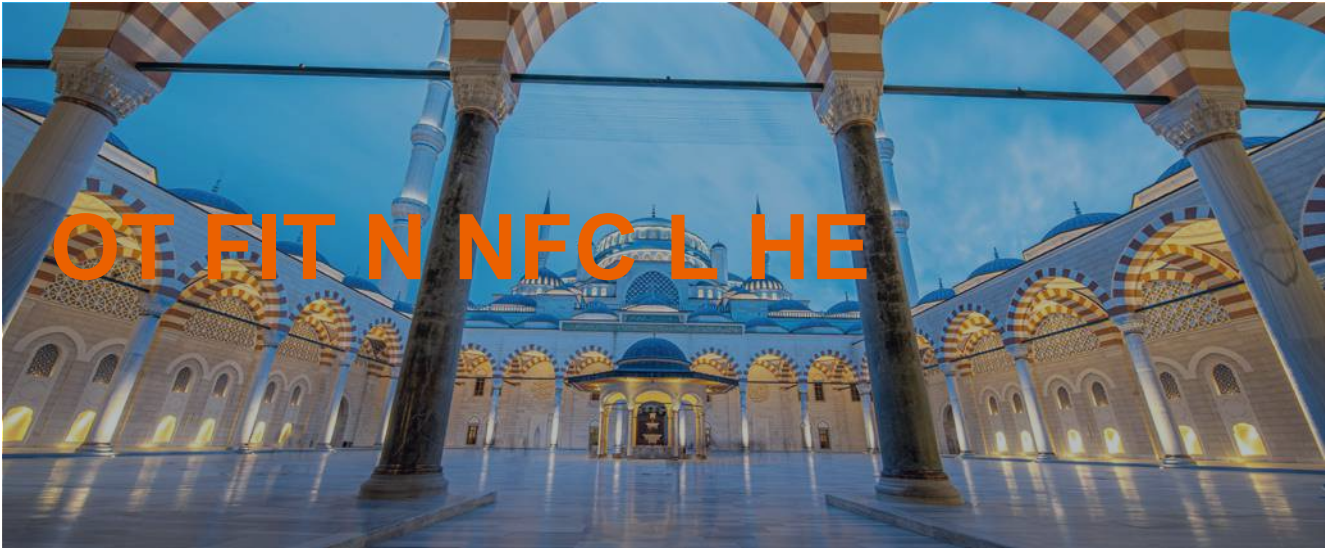

Advantages

- Very high Efficiency up to 97%
- Current adjustable via NFC
- CLO integrated for maximizing energy savings
- Small, slim white metal housing
- Suitable for emergency lighting units
- Wide Output current range
- Low THD ~ 4.7% @ full load
- Input voltage: 220 ~ 240VAC
- Ambient temp range ta: -25 ~ +55°C
- Wide output voltage range
- CLO – Constant Lumen Output
- Fixed output (no dimming)
- 5 years guarantee

Dimming Functions

Not relevant

EAN	Product Name	Nominal output power (W)	Nominal output current (mA)	Nominal output voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186128447	OT FIT 75/220-240/550 N NFC L HE	4 ~ 75	35 ~ 550	54 ~ 240	95.1%	280 x 30 x 16
6937186128461	OT FIT 150/220-240/1A0 N NFC L HE	28 ~ 150	200 ~ 1000	64 ~ 300	97%	280 x 30 x 21

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Dip switch for 4 output currents per model
- High light quality thanks to low ripple
- PF>0.95, Low THD<10% @ full load
- Excellent price/quality/watt ratio
- Suitable for Class I luminaires

Dimming Functions

Not relevant

Safety Certifications



Product Name	Output Power (W)	Adjustable Current Range (mA)	Min Dimming Output Current (mA)	Output Voltage (Vdc)	Eff. @220Vac	Dimensions (L×W×H)(mm)
EM FIT 18/220-240/0A35/N CS L	18	200/250/300/350	not relevant	24 ~ 54	87%	168 x 30 x 21
EM FIT 40/220-240/0A35/N CS L	40	200/250/300/350	not relevant	40 ~ 120	90%	168 x 30 x 21
EM FIT 60/220-240/0A35/N CS L	60	200/250/300/350	not relevant	90 ~ 175	90%	168 x 30 x 21
EM FIT 75/220-240/0A55/N CS L	75	350/400/500/550	not relevant	90 ~ 216	91%	210 x 30 x 21
EM FIT 18/220-240/0A35 CS L	18	200/250/300/350	not relevant	27 ~ 51	87%	168 x 30 x 21
EM FIT 40/220-240/0A8 CS L	40	500/600/700/800	not relevant	27 ~ 51	90%	168 x 30 x 21
EM FIT 60/220-240/1A2 CS L	60	900/1050/1100/1200	not relevant	27 ~ 51	90%	210 x 30 x 21
EM FIT 75/220-240/1A6 CS L	75	1300/1400/1500/1600	not relevant	27 ~ 51	91%	280 x 30 x 21



Advantages

- Dip switch for 4 output currents per model
- High light quality thanks to low ripple
- PF > 0.95, Low THD < 10% @ full load
- Excellent price/quality/watt ratio
- CCT selection
- Suitable for Class I luminaires

Dimming Functions

Not relevant

Safety Certifications



Product Name	Output Power (W)	Adjustable Current Range (mA)	Min Dimming Output Current (mA)	Output Voltage (Vdc)	Eff. @220Vac	Dimensions (L×W×H)(mm)
EM FIT 18/220-240/0A35/N CS L CCT	18	200/250/300/350	not relevant	24 ~ 54	87%	168 x 30 x 21
EM FIT 40/220-240/0A35/N CS L CCT	40	200/250/300/350	not relevant	40 ~ 120	90%	168 x 30 x 21
EM FIT 60/220-240/0A35/N CS L CCT	60	200/250/300/350	not relevant	90 ~ 175	90%	168 x 30 x 21
EM FIT 75/220-240/0A55/N CS L CCT	75	350/400/500/550	not relevant	90 ~ 216	91%	210 x 30 x 21



Advantages

- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Versatile scope of application due to output power range of up to 300 W
- Supply voltage: 220 ~ 240 V
- Available with output current range: up to 1,600 mA
- Constant Lumen Output (CLO)
- Non-isolated drivers
- Flexible and future-proof current setting via NFC and LT2
- Lifetime: up to 100,000 h (temperature at Tc = 75 °C, max. 10 % failure rate)
- Wide operating temperature range: -40 ~ +65 °C
- High quality of light thanks to 1% output ripple current
- High surge protection: up to 4 kV (L-N) / 4 kV (L/N-PE)
- Very high efficiency (up to 96%)
- Integrated inrush current limiter
- Fulfill safety requirement due to overload, overtemperature

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal output current (mA)	Nominal output voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186103703	OT FIT 75/220-240/550 D NFC IND L	8.0 ~ 75	125 ~ 550	64 ~ 300	94%	360 x 30 x 21
6977770438309	OT FIT 100/220-240/700 D NFC IND L	28 ~ 100	200 ~ 700	64 ~ 300	96%	360 x 30 x 21
6977770438323	OT FIT 150/220-240/1A0 D NFC IND L	43 ~ 150	250 ~ 1000	64 ~ 300	96%	360 x 30 x 21
6937186103727	OT FIT 300/220-240/1A6 D NFC IND L	40 ~ 300	250 ~ 1550	60 ~ 300	96%	360 x 46 x 28

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



PU-10Kx05KBxA



■ Features

- 90-305Vac Working Input Voltage
- Uoc=10kV & In=5kA
- Certified for both EN 61643-11 - T2 & T3
- Protection Mode for TN, TT and IT-Systems
- Available for Series & Parallel Installation
- Available for Class I & Class II luminaires
- Double Thermally Protected
- End-of-life LED Indicator
- High Temperature, 85°C Maximum Surface Temp
- Input Over Voltage Protection at 440Vac with 48 Hours
- IP66 / IP67

PU-20Kx10KTxx



■ Features

- Compatible with Inventronics LED Drivers
- 90-305Vac Working Input Voltage
- 15 kA Maximum, 10 kA Nominal (15 strikes) Surge Current Rating Using Industry Standard 8/20µs Wave
- UL1449 Type 4, EN 61643-11 – Surge Protective Devices T2 & T3
- IEEE C62.41.2 Location Category C High
- High Temperature, 85°C Maximum Ambient
- Flameproof Plastic Enclosure
- IP66

PU-20KS10KHT



■ Features

- Compatible with Inventronics LED Drivers
- 90-305Vac Working Input Voltage
- DM, CM Surge Protection Mode
- Maximum Discharge Current (Imax) 20kA, 8/20µs
- Nominal Discharge Current (In) 10kA, 8/20µs
- UL1449 Type 5 Recognized Component
- IEEE C62.41.2 Location Category C High Exposure
- High Temperature, 85°C Maximum Surface Temp Rating

PS-20KS10KHT



■ Features

- Compatible with Inventronics LED Drivers
- 249-528Vac Working Input Voltage
- DM, CM Surge Protection Mode
- Maximum Discharge Current (Imax) 20kA, 8/20µs
- Nominal Discharge Current (In) 10kA, 8/20µs
- UL1449 Type 5 Recognized Component
- IEEE C62.41.2 Location Category C High Exposure
- High Temperature, 85°C Maximum Surface Temp Rating

SPD G3



■ Features

- Mains Voltage to 320Vac
- Suitable for Luminaires of Protection Class I/II
- Fully LED Driver Protection by Up <2kV
- High Surge Protection of Up to 20 kV / 10 kA (L-N); Comply with IEC 61643-11 - T3
- Maximum Surge Protection of Up to 20 kA; Comply with IEC 61643-11 - T2
- TÜV Approved Acc. to IEC 61643-11 – T2 & T3
- IP20 (SPD G3)
- IP65 (SPD P5 G3)



PrevaLED Linear IND G1

Advantages

- Module efficacy: up to 193 lm/W
- Available with luminous flux: 1,400 lm on 280 mm
- Available with luminous flux: 2,800 lm on 560 mm
- Available with color temperature: 4,000 K, 5,000 K or 6,500 K
- High initial color consistency: ≤ 3 SDCM
- Average lifetime (L80 B50): 100,000 h (temperature at $T_c = 60^\circ\text{C}$)
- CE marked, ENEC certified
- LED module for robust application
- Very long lifetime
- Reliable system between IND LED module and Optotronic
- OT IND driver
- Adjustable luminous flux, efficacy and lifetime

Safety Certifications



More Technical Data



PrevaLED Linear G6

Advantages

- Module efficacy: up to 173 lm/W
- Available with luminous flux: 245 lm on 62 mm, 275 lm on 70 mm
- Available with luminous flux: 1,100 lm or 2,000 lm on 280 mm
- Available with luminous flux: 2,200 lm or 4,000 lm on 560 mm
- Color rendering index: 90
- High initial color consistency: ≤ 3 SDCM
- Average lifetime (L80 B50): 70,000 h (temperature at $T_c = 50^\circ\text{C}$)
- Slim luminaire design by small and flexible form factor
- High homogeneity thanks to small LED pitch
- High voltage (HV) optimized for non-isolated, low voltage (LV) optimized for SELV operation
- Adjustable luminous flux, efficacy and lifetime
- Direct the light where it's needed while using PrevaLED
- Linear Optics

Safety Certifications



More Technical Data





Advantages

- High-performance module for outdoor and street lighting
- Dimensions aligned with Zhaga book 15
- Compatible with third party optics, e.g. from LEDIL
- High module efficiency for demanding lighting solutions
- Thermal monitoring with NTC on LED Module
- Several color temperature: 2,200 K, 2,700 K, 3,000 K, 4,000 K, 5,700 K and 6,500 K and with CRI > 70 and CRI > 80
- Initial color consistency: ≤ 5 SDCM
- PrevaLED Brick HP: focused on combination of high robustness and high efficiency
- PrevaLED Brick HP HE: focused on combination of high efficiency and high lumen output

About PrevaLED Brick

PrevaLED Brick is a LED Module series for Outdoor lighting application based on the Zhaga Standard

Different configurations based on LED quantities, CCT, CRI, LED Technology are available.

Comlying with Zhaga Book 15 (IP20 versions) and Book 19 (IP66 versions with dedicated optics)

Furthermore, PrevaLED Brick is also available with 2 different LED Strings for dual channels systems and integration into Tunable White applications

Safety Certifications



Product Name	Single Color (K)	Nominal Voltage (Vdc)	Nominal Current (A)	On-Mode Power (W)	Luminous Efficacy (lm/W)	Luminous Flux (lm)	Number of LEDs Per Module
PL-BRICK HP 1000 740 2X2	4000	12	0,53	6	186	1110	4
PL-BRICK HP 1900 740 2X4	4000	23	0,53	12	186	2220	8
PL-BRICK HP 2850 740 2X6	4000	34	0,53	18	186	3330	12
PL-BRICK HP 1900 740 2X8	4000	45	0,53	24	186	4450	16
PL-BRICK HP 2850 740 2X6 IP G2	4000	34	0,53	18	186	3330	12
PL-BRICK HP 2850 740 2X4 HE	4000	23	0,53	12	204	2410	8
PL-BRICK HP 3800 740 2X6 HE	4000	34	0,53	18	204	3620	12
PL-BRICK HP 3800 740 2X8 HE	4000	45	0,53	24	204	4830	16
PL-BRICK HP 7500 3x8 HE IP	4000	70	0,53	37	208	7590	24
Product Name	Dual Color (K)	Nominal Voltage (Vdc)	Nominal Current (A)	On-Mode Power (W)	Luminous Efficacy (lm/W)	Luminous Flux (lm)	Number of LEDs Per Module
PL-BRICK HP 3000 722-740 2X4 HE 2CH	2200	23	0,35	8	157	1250	2x4
	4000	23	0,35	8	195	1550	
PL-BRICK HP 6000 722-740 2X8 HE 2CH	2200	45	0,35	16	157	2510	2x8
	4000	45	0,35	16	195	3100	



Light is design!



Experience the ultimate in world-class quality with our portfolio — enabling you to specify with unwavering confidence and peace of mind.

Expertise

Our lighting systems are designed to support unique and long-lasting lighting experiences



Flexible
and changeable



Dynamic regulation




Durable
and long-lasting

System
Value

- Highest optical uniformity with outstanding stability over time of color coordinates & luminous flux levels
- Complete, tested, and guaranteed interoperable components to build any seamless curvilinear lighting systems.
- Extended installation possibilities, with the LED driver up to 50m away from the LED module ensuring full dimming functionality, with accurate dimming down to 0.01%.
- Our lighting systems can create the most precise smart light effects, thanks to a state-of-the-art set of controllable devices, including both wired and wireless controls and sensors.
- Our global technical service ensures the necessary on-site support for your lighting project, including component customization.

Lighting System
Solutions

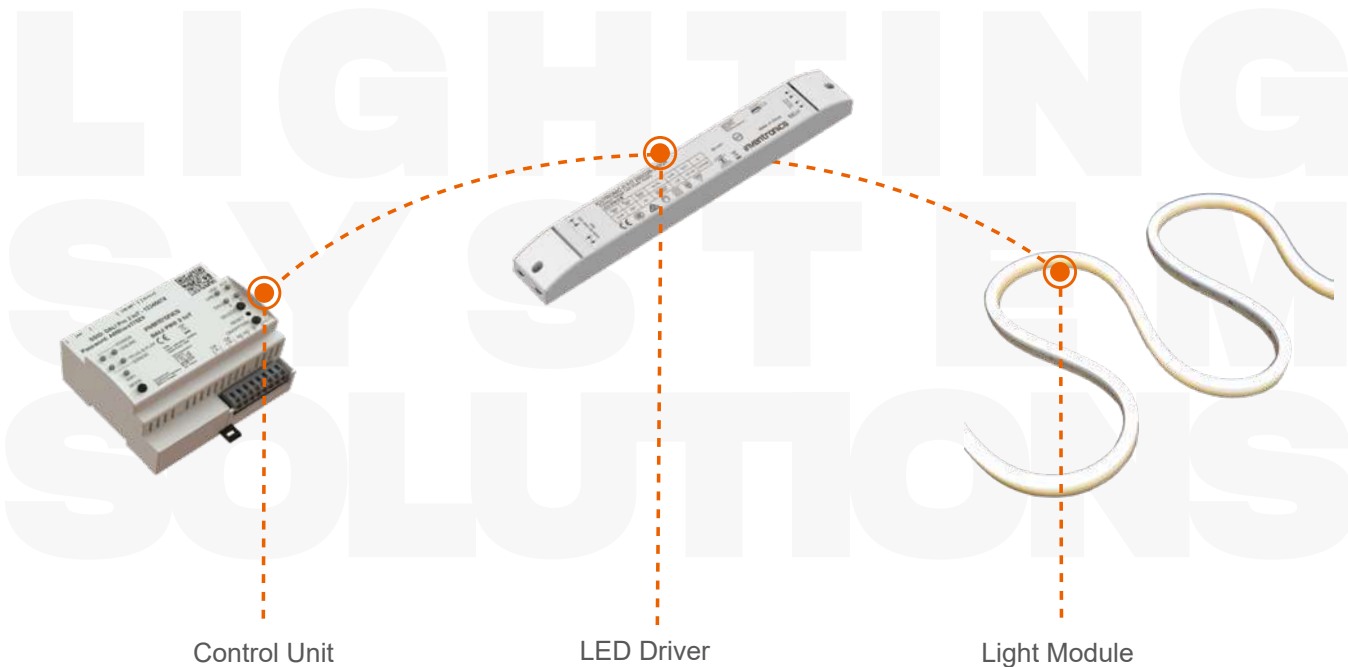

Sub-applications



Indoor Beautification



Outdoor Beautification



Marine




Entertainment



Art and Museum

Inventronics Cases

▶ A masterful blend of Turkish cultural heritage and cutting-edge architectural artistry.
Camlica Grand Mosque, Istanbul, Turkey

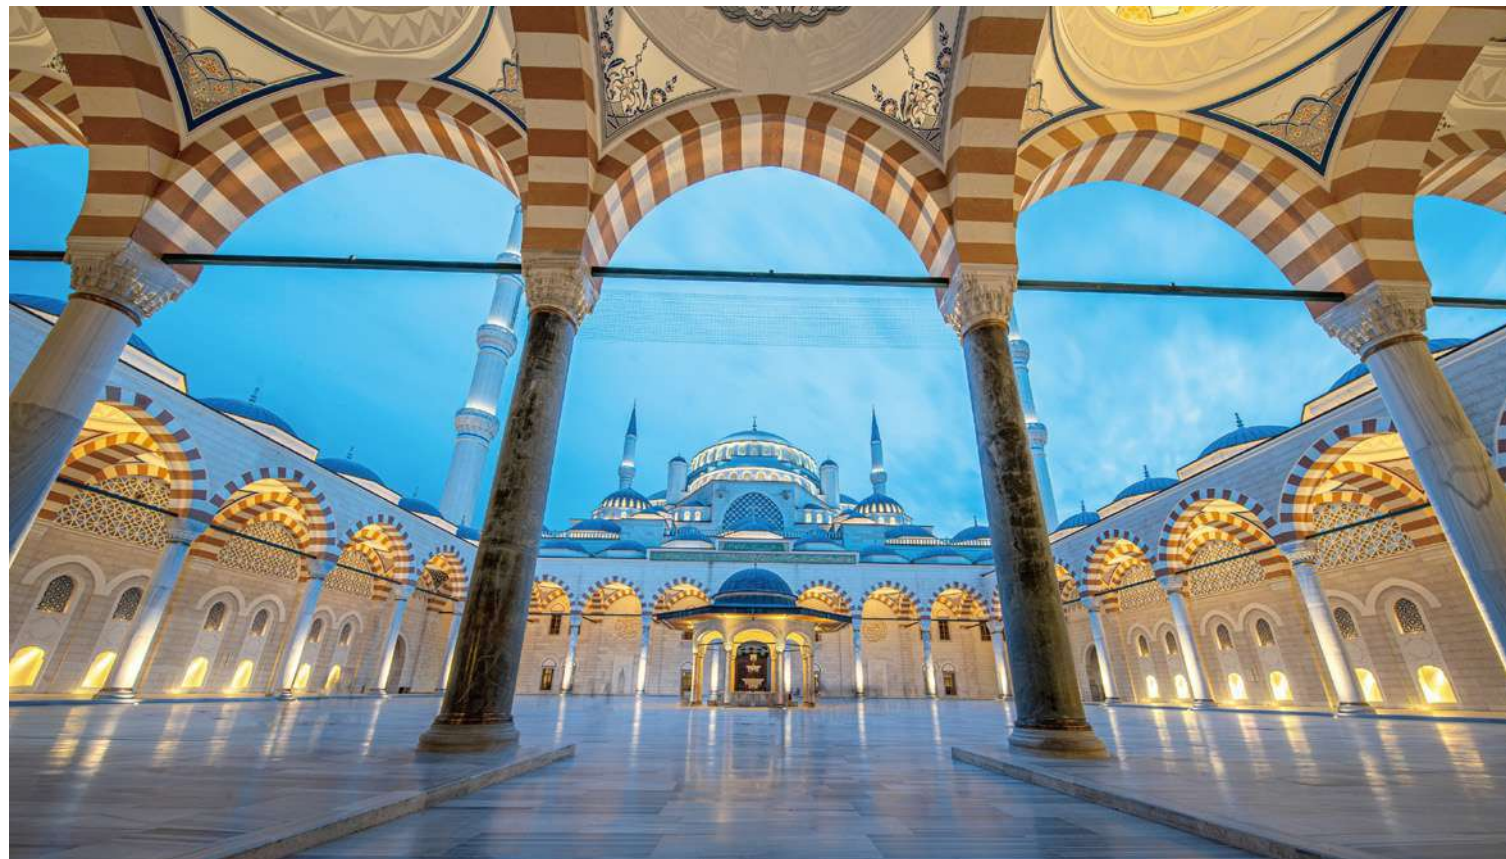

This is the most breathtaking sacred spot in Zagreb.

St. Francis of Assisi Church, Zagreb, Croatia



Luxury and elegance redefined in the heart of London.

Raffles London at The OWO



01 Controls, Sensors, Programming tools & Accessories

1.1 DALI	DALI PRO 2 IoT	145
	DALI-2 REP LI	146
1.2 Software	Tuner4TRONIC	147
	DALI PRO PC TOOL	147
	DALI Wizard	147
	DALI PRO CONTROL	147
1.3 Programming Tools	DALI magic	147

02 LED Driver & Accessories

2.1 Non Dimmable - Constant Voltage	OT 24V P	148
	OT FIT 24V P	149
	OT FIT 12V P	150
2.2 Connected - Constant Voltage	OTi DALI 24V 4CH P	151
	OTi DALI 24V	152
	IT D0 24V 1CH - 2CH	153
	OTi DALI 48V 1CH	154
	OT Wi 24V CA	155
2.3 Simple DIM - Costant Voltage	OT DIM 24V P (1...10V)	156
	OT DMX DIM 5CH	157
	OT PC 24V	158
	IT D0P 12-48V	159
2.4 Non Dimmable - Constant Voltage	IT FIT 24V	160
	OT SLIM 24V	161

03 Light Modules & Accessories

3.1 Flexible	LINEARlight FLEX Infinite IP00	162
	LINEARlight FLEX Infinite Protect	163
	LINEARlight FLEX Uniformity	164

	BASIC FLEX Shortpitch	165
	LINEARlight FLEX Colormix	166
	LINEARlight FLEX Tunable White IP00	167
	LINEARlight FLEX Tunable White Protect	168
	LINEARlight FLEX Diffuse TOP	169
	LINEARlight FLEX Diffuse SIDE	170
	TEC FLEX DIFFUSE RGBW addressable TOP	171
	TEC FLEX DIFFUSE RGBW addressable SIDE	172
3.2 Signage		
	BackLED M CP G5 24V	173
	BackLED CX G5	174
	BackLED Area Tunable White	175





Advantages

- DALI-2 certified
- IoT ready with built-in gateway for remote data access
- Easy browser-based commissioning UI and Professional Software available
- Small form factor: only 6 TE (DIN rail)
- Commissioning via Ethernet/WLAN
- DALI-2 certified for improved multi-vendor interoperability
- Template based onsite commissioning via Smart device
- Building Management System integration via optional KNX interface
- Remote access for changes in the configuration from every location
- LAN Interconnect to connect up-to 8 Controllers into one network
- Rest API for connection of a 3rd party Cloud with the DALI Pro 2 IoT Controller
- Automated testing and reporting of emergency lighting installations
- Daylight Simulation via scene recall and/or light sensor regulation

Safety Certifications



EAN	Product Name
6977078993692	DALI PRO 2 IOT

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Expansion of DALI systems by 64 DALI control gears each time
- Extends the DALI line by 300 m
- Maximum power consumption in stand-by mode: 1 W
- Four versatile operating modes: Basic, Group, Extend, Touch DIM
- Basic mode: DALI-2 certified DALI converter for grouping up to 64 standard DALI drivers.
- Group mode: Groups up to 64 DALI drivers and up to 5 Inventronics DALI-2 sensors.
- Group mode: Supports standard DALI drivers and DALI-DT8 drivers (TW / RGB (W)).
- Touch DIM mode: Simple switching and dimming of up to 64 drivers.
- Powerful power supply:130 mA DALI bus power supply
- Can be addressed via DALI

Safety Certifications



EAN	Product Name
6937186116437	DALI-2 REP LI

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



SOFTWARE

Software

Overview

Inventronics offers a comprehensive range of professional software solutions to support and configure its components.



T4T



Apps



Tuner4TRONIC

A software suite for OEMs that enables the configuration of all programmable OPTOTRONIC, ICUTRONIC, QUICKTRONIC, and POWERTRONIC LED drivers during the luminaire manufacturing process.



DALI PRO PC TOOL

Software for configuring DALI installations in combination with the DALI PROFESSIONAL control unit DALI PRO C-4 RTC or DALI PRO 2 IoT. DALI PRO 2 IoT is an innovative lighting management control technology for the IoT era.



DALI Wizard

A GUI tool for setting up, analyzing, and diagnosing DALI ECG installations, used in combination with the DALI Wizard control device.



DALI PRO CONTROL

Easily manage complex lighting scenarios at a touch: switch or dim lights, change light colors or adjust the color temperature.

PROGRAMMING TOOLS

Programming Tools

DALI magic



Features

- USB DALI converter for Tuner4TRONIC and DALI wizard software for Windows PC
- Pushbutton to test DALI dimming without need of connection to computer
- Powered by USB or by included universal power supply
- Integrated automatic DALI supply of up to 64 devices (up to 4 if powered by USB)



Advantages

- DC mode functionality
- Type of protection: IP66 and IP67
- Surge protection: up to 4 kV (L-N) / 6 kV (L/N-PE)
- Wide operating temperature range: -30 ~ +55 °C
- Lifetime: up to 50,000 h (temperature at max. tc)
- Large range of products from 20 W to 250 W
- Installation in very cold and hot environments
- Very stable output power
- High electrical reversible short-circuit, overload, overtemperature protection
- Smart Power Supply: boosting power to turn on cold LEDs
- Independent installation possible

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186114914	OT 20/220-240/24 P	20	not relevant	24.2	83%	178 x 43 x 25
6937186114938	OT 40/220-240/24 P	40	not relevant	24.2	85%	208 x 43 x 26
6937186114952	OT 60/220-240/24 P	60	not relevant	24.2	87%	208 x 43 x 26
6937186114976	OT 100/220-240/24 P	100	not relevant	24.2	90%	240 x 50 x 34
6937186114990	OT 130/220-240/24 P	130	not relevant	24.2	90.5%	220 x 63 x 37
6937186115010	OT 250/220-240/24 P	250	not relevant	24.2	92%	265 x 68 x 40

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Small housing design for mounting in coves or linear luminaires
- Versatile scope of application thanks to an output power range of up to 300 W
- Robust and durable design for outdoor applications

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
4062172085465	OT FIT 80/220-240/24 P	40 ~ 80	not relevant	24	88.5%	170 x 53 x 31.5
4062172085601	OT FIT 150/220-240/24 P	75 ~ 150	not relevant	24	92%	240 x 53 x 31.5
4062172085649	OT FIT 200/220-240/24 P	100 ~ 200	not relevant	24	93%	215 x 53 x 31.5
4062172085687	OT FIT 300/220-240/24 P	150 ~ 300	not relevant	24	93%	260 x 68 x 39.6

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Versatile scope of application due to output power range of up to 300 W
- Very high efficiency
- IP rating: up to IP66/IP67
- High surge protection: up to 6 kV (L-N) / 6 kV (L/N-PE)

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770438675	OT FIT 30/220-240/12 P	30	not relevant	12	82%	190 x 40 x 20.5
6977770438613	OT FIT 60/220-240/12 P	60	not relevant	12.5	87%	157 x 53 x 31.5
6977770438637	OT FIT 150/220-240/12 P	150	not relevant	12.5	91%	202 x 53 x 31.5
6977770438651	OT FIT 300/220-240/12 P	300	not relevant	12.5	91%	266 x 83 x 39.5

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- LED driver whose output power can be shared arbitrarily among the 2 or 4 channels
 - Dimming range: 0/0, 1 ~ 100 %
 - Line frequency: 0 Hz | 50 Hz | 60 Hz
 - High level surge protection: up to 6 kV (L-N), 8 kV (L/N-PE)
 - Inrush current limiter circuit
 - Long lasting and high reliability
 - From 1 to 4 channels to arbitrarily distribute the power
 - Suitable for installation under sunlight
- IP66/IP67 Salt mist resistant and DC functionality
 - AstroDim functionality for automatic dimming and turn on/off

Dimming Functions

DALI-2

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
4062172364263	OTi DALI 210/220-240/244CHDT6/8 P	0 ~ 210	8500	24.7	93%	330 x 80 x 47
4062172364324	OTi DALI 100/220-240/244CHDT6/8 P	0 ~ 100	not relevant	24.7	93%	237 x 80 x 40

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Dimmable via Touch DIM
 - Available as single-channel or multi-channel with DT6 and DT8 in one device
 - Dimming range: 0.1 ~ 100 % (for 50-80-160W) or 1 ~ 100 % (for 30W)
 - Line frequency: 0 Hz | 50 Hz | 60 Hz
 - Intelligent power matching thanks to Smart power supply
 - Form factor for mounting on the cove or in luminaires
 - No stroboscopic effect thanks to patented high PWM frequency management (2 kHz)
 - IP rating: IP20
- Suitable for installation in emergency lighting systems according to EN 60598-2-22

Dimming Functions

DALI-2

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186115119	OTi DALI 30/220-240/24 1CH	30	not relevant	24.2	88%	103 x 67 x 29.5
6977770431881	OTi DALI 50/220-240/24 1CH G3	50	not relevant	24	92%	346 x 32 x 22
6977770431966	OTi DALI 50/220-240/24 4CH DT6/8 G3	50	not relevant	24	92%	347 x 32 x 22
6977770431867	OTi DALI 80/220-240/24 1CH G3	80	not relevant	24	93%	348 x 32 x 22
6977770431942	OTi DALI 80/220-240/24 4CH DT6/8 G3	80	not relevant	24	93%	349 x 32 x 22
6977770431904	OTi DALI 160/220-240/24 1CH G3	160	not relevant	24	93%	300 x 50 x 35
6977770431928	OTi DALI 160/220-240/ 24 2CH DT6/8 G3	160	not relevant	24	93%	301 x 50 x 35

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advatanges

- DALI-2 certified
- 2 independent channels
- Lamp Failure detection
- CLASS II independent housing
- Smart Power Supply
- SELV, Vout: 24,2 V
- ta range -20 ~ +50°C
- Very low min dimming level: 1%
- Mains voltage: 220 ~ 240 Vac
- 50'000 h lifetime at max tc
- 5 years guarantee
- IP20 independent housing
- Touch-DIM and corridor compatibility
- Overload/Over temperature and Short circuit protection
- Dimmable via DALI, 0-10V, Touch-Dim or corridor
- 24.2 V nominal output + 1.5 V adjustable
- CC mode for 18 ~ 24 V output option

EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186142214	IT D0 36/220-240/24 C UNV1	36	not relevant	24	85	240 x 60 x 25
6937186142238	IT D0 75/220-240/24 C UNV1	75	not relevant	24	88	275 x 60 x 25
6937186142252	IT D0 150/220-240/24 C UNV1	150	not relevant	24	90	320 x 60 x 30
6937186142276	IT D0 200/220-240/24 C UNV1	200	not relevant	24	92	320 x 60 x 30
6937186142290	IT D0 36/220-240/24/2C C TW UNV1	36	not relevant	24	85	240 x 60 x 25
6937186142313	IT D0 75/220-240/24/2C C TW UNV1	75	not relevant	24	88	275 x 60 x 25
6937186142337	IT D0 150/220-240/24/2C C TW UNV1	150	not relevant	24	90	320 x 60 x 30
6937186142351	IT D0 200/220-240/24/2C C TW UNV1	200	not relevant	24	92	320 x 60 x 30

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.



Advantages

- Dimmable via Touch DIM
- Dimming range: 0.1 ~ 100 %
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- IP rating: IP20
- Suitable for use in luminaires of protection class I and II
- Intelligent power matching thanks to Smart power supply
- 50 m load cable with EMI validated
- Form factor for mounting on the cove or in luminaires
- No stroboscopic effect thanks to patented high PWM frequency management (> 2 kHz)
- Suitable for installation in emergency lighting systems according to EN 60598-2-22
- DALI message detection "LED Module failure"
- DALI part 251-252-253

About OTi DALI 48V 1CH

Constant voltage indoor dimmable LED drivers, independent housing for installation freedom on any surfaces, Allows to dim 48V constant voltage LED modules via DALI.

Dimming Functions

DALI-2

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770432499	OTi DALI 160/220-240/48 1CH	0 ~ 160	not relevant	48.2	98%	33.5 x 26.8 x 16.7

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.



Advantages

- 50, 80, 160 W / 24 V LED drivers, multichannel output
- Lighting wireless Bluetooth Mesh network
- Different light profiles to customize the application
- Power supply and control of white, Tunable White, Tunable Warm White, Dim to Warm
- Power supply and control of RGB and RGBW LED modules (only 50 W and 80 W)
- Driver with integrated CASAMBI lighting control system
- Slim form factor for installation in light boxes
- No stroboscopic effect thanks to patented high PWM frequency management (> 2 kHz).

About OT Wi 24V CA

Optotronic Wireless Intelligent Constant Volgate drivers with CASAMBI control, up to 4 output channel for diffenernt LED module control (White, monochrome, TW, RGBW). Inndependent housing for installation freedom on any surfaces.

Dimming Functions

Bluetooth Casambi

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186115195	OT WI 50/220-240/24 4CH CA	50	75 ~ 400	54 ~ 240	92%	280 x 30 x 21
6937186115171	OT WI 80/220-240/24 4CH CA	80	125 ~ 550	54 ~ 240	93%	280 x 30 x 21
6937186115218	OT WI 160/220-240/24 2CH CA	160	100 ~ 750	54 ~ 260	94%	280 x 30 x 21

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- DC mode functionality
- Type of protection: IP66 and IP67
- Surge protection: up to 4 kV (L-N) / 6 kV (L/N-PE)
- Wide operating temperature range: -30 ~ +55 °C
- Lifetime: up to 50,000 h (temperature at max. tc)
- Dimmable via fully isolated 1 ~ 10 V interface
- Large range of products from 20 W to 250 W
- Installation in very cold and hot environments
- Very stable output power
- High electronical reversible short-circuit, overload,
- overtemperature protection

- Smart Power Supply: boosting power to turn on cold LEDs
- Independent installation possible
- Dimming range: 1...100 %

Dimming Functions

1...10V

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770438347	OT 20/220-240/24 DIM P	20	not relevant	24.2	83%	178 x 43 x 25
6977770438361	OT 40/220-240/24 DIM P	40	not relevant	24.2	85%	208 x 43 x 26
6977770438385	OT 60/220-240/24 DIM P	60	not relevant	24.2	87%	208 x 43 x 26
6977770438408	OT 100/220-240/24 DIM P	100	not relevant	24.2	90%	240 x 50 x 34
6977770438422	OT 130/220-240/24 DIM P	130	not relevant	24.2	90.5%	220 x 63 x 37
6977770438446	OT 250/220-240/24 DIM P	250	not relevant	24.2	92%	265 x 68 x 40

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Product Features

- Intelligent DMX dimmer, with output voltage of 12, 24 and 48 V
- Control of LED modules up to 12 A
- RDM functionality for total control in application
- Control of white, Tunable White, RGB, RGBW and RGBTW LED modules
- Independent housing for ceiling installation
- Minimal installation effort
- Selectable PWM frequency

EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977078993838	OT DMX DIM 5CH	576	not relevant	12 ~ 48	95%	172 x 42 x 20

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- IP rating: IP20
- High efficiency
- Very stable output power
- High electrical reversible short-circuit, overload, overtemperature protection
- Independent installation possible
- Suitable for luminaires of protection classes I and II
- 24 V constant output voltage SELV
- Wide Ta range -20 ~ +50
- Lifetime: up to 50,000 h(temperature at max.tc)
- Dimming range: 3 ~ 100 % luminous flux
- Recommended to Use Trailing Edge dimmer

EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770438460	OT FIT 36/220-240/24 PC	24.2 ~ 36	not relevant	24.2	85%	103 x 67 x 29.5
6977770438484	OT FIT 75/220-240/24 PC	24.2 ~ 75	not relevant	24.2	92%	110 x 75 x 30
6977770438569	OT FIT 150/220-240/24 PC	60.5 ~ 150	not relevant	24.2	92%	170 x 76 x 30

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- 12-48 V SELV output constant voltage range
- Output power up to 480 W
- 10A handling allowed on one channel
- Overload/Over temperature/Short circuit protection, automatic, reversible 50.000h at tc max*
- *10% cumulated failure
- Screw terminals and integrated cable clamps
- Suitable for Class I & II luminaires
- Wide ta range -25 ~ +50°C
- NFC programmability
- Touch DIM compatibility
- 5 years guarantee
- High power handling on 4 channels
- Multi-dim protocols: DALI-2, 0/1-10V, Resistor, PWM
- 1 to 4 channel output with DALI-2 certification
- DALI-2 certified incl. Parts 251, 252, 253
- DT6 and DT8 operations
- TW in 0-10V compatible

EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186134127	IT D0P 480/12-48V/4C NFC L C RGBW	480	0.1%	12 - 48	/	195 x 51 x 20

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

About IT D0P 12-48V

- Multi-dimming DC-DC device, in system with inventronics constant voltage LED drivers with ON/OFF funtions can deliver dimming operations up to 480 W from 4 output channels
- 21 different dimming options easily programmable with NFC
- Box programming available for fast batch programming
- Independent housing with endcaps allows maximum installation freedom
- Compatible with touch timming and double touch dimming in TW for dimmable solutions without DALI interfaces

Dimming Functions

DALI-2 / 0(1)-10V / PWM

Safety Certifications



Advantages

- Wide Ta range -20 ~ +50
- 24 V constant output voltage
- Output power up to 250 W
- High efficiency up to 93% (depend on different wattage)
- PF 0.98
- Screw terminal
- Suitable for Class I/II luminaires
- Build-in and independent installation
- 5 years guarantee*
- Cable clamp integrated
- SELV
- Overload protection
- Overtemperature protection
- Mains voltage: 220 ~ 240 VAC
- Class II design for wide application
- Well design for Flex and Signage
- Excellent price/quality/watt ratio
- Lifetime: up to 50,000 h (temperature at max. tc)

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186142672	IT FIT 30/220-240/24	30	not relevant	24	87%	170 x 40 x 30
6937186142696	IT FIT 60/220-240/24	60	not relevant	24	89%	224 x 40 x 30
6937186142610	IT FIT 120/220-240/24	120	not relevant	24	90%	284 x 40 x 30
6937186142634	IT FIT 180/220-240/24	180	not relevant	24	92%	324 x 40 x 30
6937186142658	IT FIT 250/220-240/24	250	not relevant	24	93%	375 x 50 x 35

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Constant Voltage drivers suitable for 24V LED
- Type of protection: IP20
- Wide operating temperature range: -20 ~ +50 °C
- Lifetime: up to 50,000 h (temperature at max. tc)
- Installation in cold and hot environments
- Very stable output power
- High electrical reversible short-circuit, overload, overtemperature protection
- Independent installation possible

About OT SLIM 24V

Constant Voltage drivers suitable for 24V LED modules with very low housing profile suitable for independent installations

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770438699	OT SLIM 30/220-240/24	30	not relevant	24.2	86%	315 x 282 x 145
6977770438712	OT SLIM 60/220-240/24	60	not relevant	24.2	90%	350 x 192 x 145
6977770438736	OT SLIM 100/220-240/24	100	not relevant	24.2	91%	387 x 192 x 150
6977770438750	OT SLIM 160/220-240/24	160	not relevant	24.2	92%	417 x 192 x 165
6977770438774	OT SLIM 250/220-240/24	250	not relevant	24.2	91%	357 x 312 x 100

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Nominal voltage: 24 V | 48 V
- Nominal wattage per meter: 4.0 W ~ 25.8 W
- Type of protection: IP00
- Color rendering index Ra: 80 | 90
- Color temperature: 2400 K ~ 4000 K
- Luminous flux per meter: 325 lm ~ 4100 lm
- Length: 3000 mm ~ 18000 mm
- Length – smallest unit: 50 mm | 100 mm
- Beam angle: 120 °
- LEDs per meter: 80
- Color uniformity better than 2 SDCM on the entire LED strip and between strips
- Light stability over time typically 1 SDCM, tested acc. to IEC 62717 @ 6,000 h
- LED lifetime acc.to IES LM-80 and IES TM-21 standards, and also internal Lab tests
- Reliable photometric parameters according to IES LM-79, EN13032-4 and CIE S 025
- Accurate description of the color rendition of the light source acc. to IES TM-30-15

- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Vibration-resistant for stationary installations acc. to IEC60068-2-6 and IEC60068-2-64
- Flicker and stroboscopic effect-free acc. to IEC TR 61547-1 and IEC TR 63158
- Tested by accredited Product Qualification Lab. ISO9001, ISO 17025, ACCREDIA, VDE
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back

Safety Certifications



More Technical Data

24V Models:



48V Models:





Advantages

- Nominal voltage: 24 V | 48 V
- Nominal wattage per meter: 4.0 W ~ 26.4 W
- Type of protection: IP66/IP68
- Color rendering index Ra: 80 | 90
- Color temperature: 2400 K ~ 4000 K
- Luminous flux per meter: 430 lm ~ 4000 lm
- Length: 3000 mm ~ 18000 mm
- Length – smallest unit: 50 mm | 100 mm
- Beam angle: 120 °
- LEDs per meter: 80
- Color uniformity better than 2 SDCM on the entire LED strip and between strips
- Light stability over time typically 1 SDCM, tested acc. to IEC 62717 @ 6,000 h
- LED lifetime acc.to IES LM-80 and IES TM-21 standards
- Reliable photometric parameters according to IES LM-79, EN13032-4 and CIE S 025
- Accurate description of the color rendition of the light source acc. to IES TM-30-15
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Vibration-resistant for stationary installations acc. to IEC60068-2-6 and IEC60068-2-64
- Flicker and stroboscopic effect-free acc. to IEC TR 61547-1 and IEC TR 63158
- Tested by accredited Product Qualification Lab. ISO9001, ISO 17025, ACCREDIA, VDE
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- High-performance silicone for extremely long life

Safety Certifications



More Technical Data

24V Models:



48V Models:



Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 6.1 W ~ 20 W
- Type of protection: IP00 | IP68
- Color rendering index Ra: 80 ~ 95
- Color temperature: 2500 K ~ 4000 K
- Luminous flux per meter: 800 lm ~ 2100 lm
- Length: 5000 mm | 10000 mm
- Length – smallest unit: 50 mm
- Beam angle: 120°
- LEDs per meter: 140
- Color uniformity better than 2 SDCM on the entire LED strip and between strips
- Light stability over time typically 1 SDCM, tested acc. to IEC 62717 @ 6,000 h
- LED lifetime acc.to IES LM-80 and IES TM-21 standards
- Reliable photometric parameters according to IES LM-79, EN13032-4 and CIE S 025
- Accurate description of the color rendition of the light source acc. to IES TM-30-15
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Vibration-resistant for stationary installations acc. to IEC60068-2-6 and IEC60068-2-64
- Flicker and stroboscopic effect-free acc. to IEC TR 61547-1 and IEC TR 63158
- Tested by accredited Product Qualification Lab. ISO9001, ISO 17025, ACCREDIA, VDE
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- High-performance silicone for extremely long life

Safety Certifications



More Technical Data





Advantages

- Energy saving low-power flexible LED strip
- Easy installation with track system
- Multi-cutable LED strip with CONNECT system
- Available in warm white and neutral white
- 120° viewing angle per module
- Consistent white light: 3 SDCM
- Color rendering index 90+ (CRI) and R9 > 50
- Lifetime: up to 50,000 h L70B50
- Dimmable (with suitable DALI dimming methods)
- Available with protection class IP00 and IP66
- IP66 protection, IP54 when cut and reconnected

Safety Certifications




More Technical Data



Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 7.9 W ~ 19.6 W
- Type of protection: IP00 | IP68
- Color rendering index Ra (white): up to 90
- Color temperature (white): 2200 K ~ 6500 K
- Luminous flux per meter: up to 1275 lm
- Length: 5100 mm | 6000 mm
- Length – smallest unit: 100 mm | 150 mm
- Beam angle: 120°
- LEDs per meter: up to 120
- Uniform color changing
- Great design freedom thanks to flexibility and cuttability of module
- High-performance silicone for extremely long life and flexibility
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- Extraordinary design and high quality materials
- Toolless connection with the optional CONNECTsystem

Safety Certifications



More Technical Data






Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 9.8 W ~ 34.7 W
- Type of protection: IP00
- Color rendering index Ra: 90
- Color temperature: 2700 K ~ 4180 K
- Luminous flux per meter: 1111 lm ~ 3400 lm
- Length: 3000 mm | 9000 mm
- Length – smallest unit: 75 mm
- Beam angle: 120 °
- LEDs per meter: 187
- Color uniformity better than 3 SDCM on the entire LED strip and between strips
- LED lifetime acc.to IES LM-80 and IES TM-21 standards
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- Extraordinary design and high quality materials
- Pre-soldered wires

Safety Certifications



More Technical Data



Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 9.9 W ~ 32 W
- Type of protection: IP67
- Color rendering index Ra: 80 | 90
- Color temperature: 3100 K | 3700 K
- Luminous flux per meter: 1134 lm ~ 3356 lm
- Length: 3000 mm | 9000 mm
- Length – smallest unit: 75 mm
- Beam angle: 120 °
- LEDs per meter: 187
- Color uniformity better than 3 SDCM on the entire LED strip and between strips
- LED lifetime acc.to IES LM-80 and IES TM-21 standards, and also internal Lab tests
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- Extraordinary design and high quality materials
- High-performance silicone for extremely long life

Safety Certifications



More Technical Data





Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 7.3 W ~ 21 W
- Type of protection: IP66/IP68
- Color rendering index Ra: 80 | 90
- Color temperature: 2440 K ~ 7100 K
- Luminous flux per meter: 460 lm ~ 1550 lm
- Length: 4000 mm ~ 10000 mm
- Length – smallest unit: 50 mm
- Beam angle: 120 °
- LEDs per meter: 140
- IP66/IP68 protection with high performance silicone
- Reliable connection over long periods of time: IP66/67 connector with built-in protection against liquids penetrating through the wires into the LED strip
- Outdoor use possible: UV and salt mist resistant (UV acc. to ISO 4892-2 - Method A, salt mist acc. to IEC 60068-2-52 severity 1)

Safety Certifications



More Technical Data



Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 7 W ~ 21 W
- Type of protection: IP66/IP67 | IP66/IP68 | IP67
- Color rendering index Ra: 80 | 90
- Color temperature: 2300 K ~ 6900 K
- Luminous flux per meter: 340 lm ~ 1050 lm
- Length: 4000 mm ~ 10000 mm
- Length – smallest unit: 50 mm
- Beam angle: 120 °
- LEDs per meter: 140
- IP68 protection with high performance silicone
- Reliable connection over long periods of time: IP67 connector with built-in protection against liquids penetrating through the wires into the LED strip
- Outdoor use possible: UV and salt mist resistant (UV acc. to ISO 4892-2 - Method A, salt mist acc. to IEC 60068-2-52 severity 1)

Safety Certifications



More Technical Data





Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 18.0 W
- Type of protection: IP67
- Color rendering index Ra: RGB
- Color temperature: 4000 K
- Luminous flux per meter: 170 lm
- Length: 5000 mm
- Length – smallest unit: 100 mm
- Beam angle: 120 °
- LEDs per meter: 70
- Pastel colours thanks white LED with good color rendering (4000K)
- Long lifetime: 50.000 hours

Safety Certifications



More Technical Data



Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 18.0 W
- Type of protection: IP67
- Color rendering index Ra: RGB
- Color temperature: 4000 K
- Luminous flux per meter: 170 lm
- Length: 5000 mm
- Length – smallest unit: 100 mm
- Beam angle: 120 °
- LEDs per meter: 70
- Pastel colours thanks white LED with good color rendering (4000K)
- Long lifetime: 50.000 hours

Safety Certifications



More Technical Data





Advantages

- LED chain comprising up to 40 LED modules connected by flexible cables
- Each LED module contains 2 or 4 LEDs (XL model)
- LED module pitch variable between 60 and ~200 mm
- Compatible with OPTOTRONIC constant voltage drivers / dimmers
- Color consistency in 3 SDCM
- Patented Square Lens technology
- Wide CCT and color options available
- IP66 rating
- Lifetime (L80/B10): 50,000 h (temperature at Tc = 70 °C)
- 5-year warranty @ Ta = 70 °C
- High module efficacy: up to 135 lm/W
- Uniform light pattern design for 60 ~ 200 mm lightbox depth
- Backside injection technology for high protection level
- Energy saving with high efficacy
- Flammability rating at V0

Safety Certifications



More Technical Data

BackLED
M CP G5:

BackLED
L CP G5:

BackLED
XL CP G5:



Advantages

- Color consistency in 3 SDCM
- Diffusive Optics technology
- Wide CCT options available
- IP66 Rated
- High module flux output up to 80 lm (M-model) and 162lm (L-model)
- 5 year warranty
- Wide beam angle for high uniformity
- Good solution to reduce system cost

Safety Certifications



More Technical Data

BackLED
M CX G5:

BackLED
L CX G5:



Advantages

- 24 V constant voltage LED modules
- Tunable white 2700K-6500K for dynamic white applications
- Color rendering index Ra: 90
- Constant LED pitch even at board interconnections
- Cuttable, single board for an exact fit in any installation
- Product only compatible with DALI DT8 drivers (TW) or BLE devices with TW lamp profiles
- Provides homogenous light suitable for application in area luminaires
- Quick and easy mounting thanks to plastic holder
- Easy wiring with push-in connectors
- Low energy consumption and less heat generation
- Optimal operation on OPTOTRONIC® 24VDC and 24VDC dimmable power supplies

Safety Certifications



More Technical Data





Light at work!

Choose the most fitting cost-benefit smart lighting system for your solutions. By selecting our advanced systems, your solutions will deliver quality lighting, reduce operational costs, and add benefits of IoT services beyond lighting.

Expertise

Lighting systems play a crucial role in promoting comfort, productivity and energy efficiency for public buildings, offices and education institutions.

Our solutions are designed to deliver maximum flexibility with highest quality of light as a result of:



Sophisticated lighting control



Efficient & durable components



Simple operation & future scalability

System Value

- Our systems are built on fully tested, interoperable components, including LED modules, smart drivers, sensors, and controls.
- Best-in-class levels of efficiency and durability, making them a building block for sustainable solutions and circular economy.
- We champion standardization to integrate the latest technical advancements in the lighting industry.
- Beyond complete lighting systems, we provide comprehensive technical support, from customization to meeting special requirements.
- Our smart controls, both wired and wireless, ensure light comfort without compromising energy savings, while remaining open to IoT services beyond lighting applications.
- Systems designed to meet the application requirements with geographical fit.

Sub-applications



Schools



Office Buildings




Healthcare



Government

Lighting System Solutions

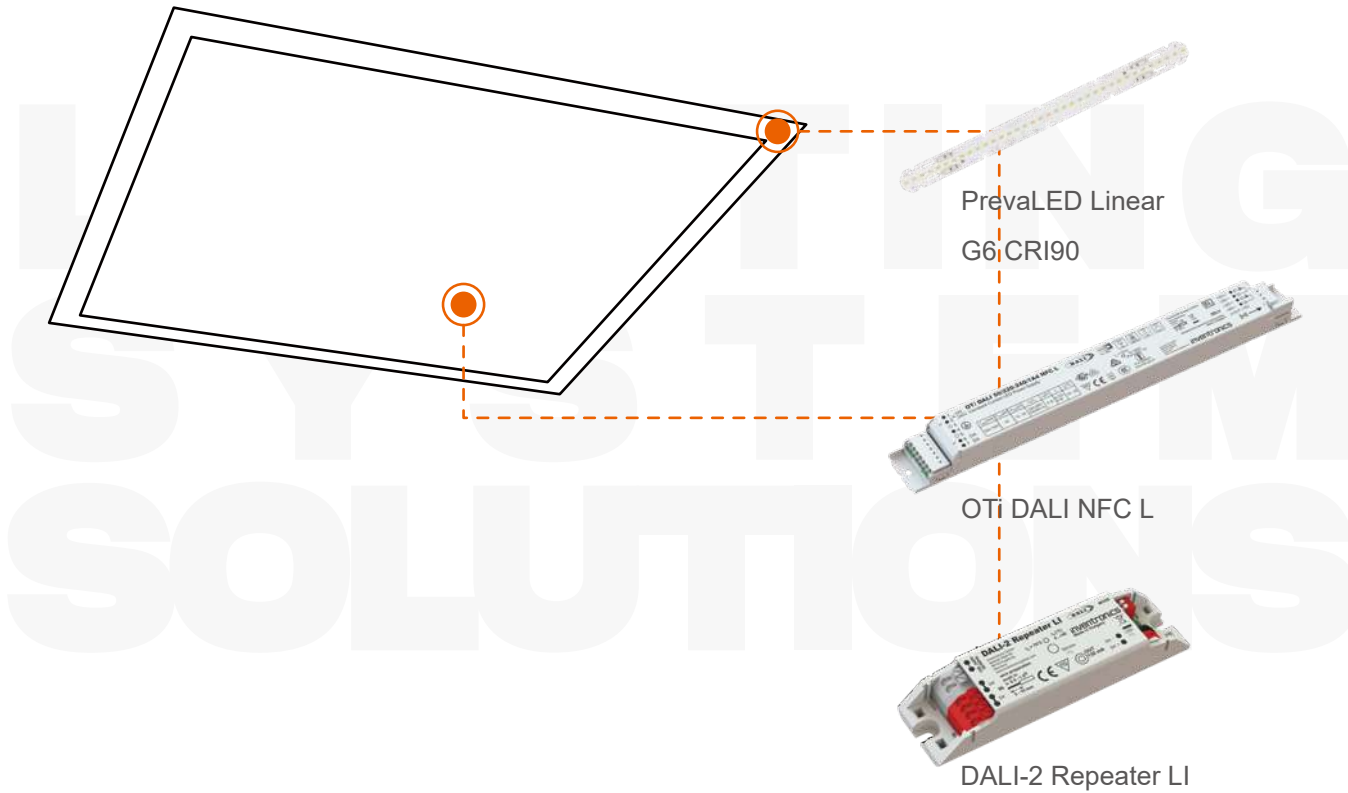

Inventronics Cases

Create human-centric lighting environments.
Fernandez Molina Offices, Madrid, Spain



Set a new benchmark for modern lighting in office spaces.
Office lighting – Greenford, UK



Daylight and presence-dependent office lighting on 18 floors – all wireless thanks to HubSense.
Office lighting, Leeuwarden, Netherlands



Intelligent lighting solutions that create a human-centric and sustainable lighting experience with a powerful control system.
Inventronics office, Gurgaon, India



01 Controls, Sensors, Programming tools & Accessories

1.1 DALI	DALI PRO 2 IoT	187
	DALI MCU TW G2	188
	DALI ECO BT RTC	189
	DALI-2 SENSOR LS/PD HB LI	190
	DALI-2 REP LI	191
1.2 Bluetooth NLC	Bluetooth NLC D4i Module Indoor	192
	Bluetooth NLC 0-10 Module Indoor	193
	Bluetooth NLC 220-240 LS/PD CI	194
1.3 Software	Tuner4TRONIC	195
	DALI PRO PC TOOL	195
	DALI Wizard	195
	BT Config	195
	BT CONTROL	195
	DALI PRO CONTROL	195
	HubSense Commissioning	195
1.4 Programming Tools	DALI magic	196

02 LED Driver & Accessories

2.1 Connected - Constant Current	OT Wi D NFC BL L	197
	OTi DALI N NFC L HE	198
	OT Wi QBM NFC LP I	199
	OTi DX NFC	200
	OTi DALI NFC L	201
	OTi DALI NFC	202
2.2 Connected - Constant Voltage	IT D0 24V 1CH - 2CH	203
	OTi DALI 48V 1CH	204
	OT Wi 24V CA	205
2.3 Simple DIM - Constant Current	LUM-MT	206
2.4 Non Dimmable - Costant Current	ELEMENT	207
	EM FIT (N) CS L	209
	EM FIT N CS L CCT	210

03 Light Modules & Accessories

3.1 Linear & Area	
PrevaLED Linear G6	211
PrevaLED COIN 50 COB G2	212
PrevaLED Flat AC BL	213





Advantages

- DALI-2 certified
- IoT ready with built-in gateway for remote data access
- Easy browser-based commissioning UI and Professional Software available
- Small form factor: only 6 TE (DIN rail)
- Commissioning via Ethernet/WLAN
- DALI-2 certified for improved multi-vendor interoperability
- Template based onsite commissioning via Smart device
- Building Management System integration via optional KNX interface
- Remote access for changes in the configuration from every location
- LAN Interconnect to connect up-to 8 Controllers into one network
- Rest API for connection of a 3rd party Cloud with the DALI Pro 2 IoT Controller
- Automated testing and reporting of emergency lighting installations
- Daylight Simulation via scene recall and/or light sensor regulation

Safety Certifications



EAN	Product Name
6977078993692	DALI PRO 2 IOT

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Up to 4 DALI PCU TW G2 can be connected in parallel to set up multiple control points
- Automatic synchronization between the control points
- Cover and rotary switch in neutral white
- Length of the DALI control cable: up to 300 m
- Intuitive manual dimming, switching and changing of colour temperature
- Individual setting of minimal brightness level
- Individual setting of colour temperature range

Safety Certifications



EAN	Product Name
6977078993777	DALI MCU TW G2

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Compact light control with DALI interface
 - Smart phone connection via Bluetooth® to control and configure
 - Integrated clock for time based control of brightness and color temperature (HCL)
 - Adaptable HCL curve with up to 24 points
 - One DALI output channel (Broadcast or Groupcast)
 - Up to 32 DALI luminaires connectable
 - Supports up to 4 OSRAM DALI sensors and pushbutton couplers
 - Daylight-dependent regulation and presence-dependent control of light
 - Pushbutton interface to separately control brightness and color temperature
 - Daytime depending change of brightness and color temperature (HCL)
 - Suitable for Human Centric Lighting Applications (HCL)
 - Control the light via Smartphone
 - Adjustment of all settings via smartphone
- Up to 4 timers with ON-/OFF-Time and weekday configurable
 - Simplified startup thanks to predefined operation modes
 - Intuitive manual dimming, switching and changing of colour temperature
 - Up to 4 groups separatly controllable
 - Adjustable Offset for different groups
 - Easy Scene creation via App
 - Firmware update over-the-air via Bluetooth possible
 - Integrated DALI supply
 - Control of standard white or Tunable White light acc.
 - DALI device type 8 (DT8)
 - Selected DALI parameters changeable via APP


Safety Certifications



EAN	Product Name
6977078993753	DALI ECO BT RTC CONTROL

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data

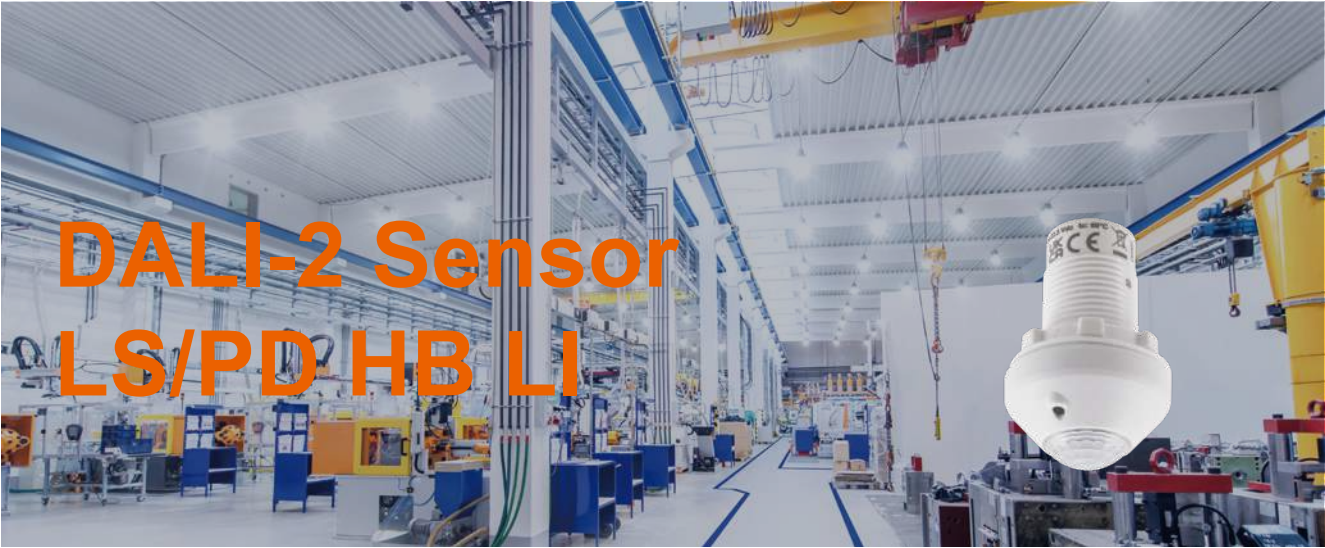

Advantages

- Light and motion sensor for luminaire installation
 - Motion detection via passive IR element
 - Light sensor operating range: 5 ~ 2000 lx (measured at sensor)
 - Detection height up to 17 m
 - Function indicator LED
 - Intended for installation into a standard ½" knockout
 - Design freedom due to compact size
 - Protection Class IP65 (In installed condition)
 - Easy to integrate in luminaire
- DALI-2 certified
 - DALI Bus powered (No mains connection necessary)
 - Multiple sensors connectable to the same DALI line
 - Shutter included to optimize sensor detection
 - Integreatable in light- and building management systems supporting DALI-2 sensors

EAN	Product Name
6977078993791	DALI-2 SENSOR LS/PD HB LI

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Expansion of DALI systems by 64 DALI control gears each time
- Extends the DALI line by 300 m
- Maximum power consumption in stand-by mode: 1 W
- Four versatile operating modes: Basic, Group, Extend, Touch DIM
- Basic mode: DALI-2 certified DALI converter for grouping up to 64 standard DALI drivers.
- Group mode: Groups up to 64 DALI drivers and up to 5 Inventronics DALI-2 sensors.
- Group mode: Supports standard DALI drivers and DALI-DT8 drivers (TW / RGB (W)).
- Touch DIM mode: Simple switching and dimming of up to 64 drivers.
- Powerful power supply: 130 mA DALI bus power supply
- Can be addressed via DALI

Safety Certifications



EAN	Product Name
6937186116437	DALI-2 REP LI

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- With/without Daylight and Occupancy Sensor D4i Module
- Bluetooth NLC enabled by Silvar
- Control of D4i drivers or DALI drivers with additional DALI bus power supply
- Intended for installation into a standard 1/2" knockout
- Works with Hubsense®
- Standard communication protocol released by Bluetooth SIG
- Design freedom due to compact size
- Easy to integrate in luminaire
- Minimize internal wiring in combination with D4i drivers
- Secured product communication granted by ioXT and PSA Certificates

Safety Certifications



EAN	Product Name
6977078990363	B NLC D HB LI
6977078990387	B NLC D LI R
6977078990448	B NLC D MB LI
6977078990462	B NLC D LB LI
6977078993425	B NLC D OF LI BK
6977078997041	B NLC D OF LI S
6977078997553	B NLC D OF LI

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Bluetooth NLC 0-10 Module Indoor

Advantages

- Design freedom due to compact size
- Easy to integrate in luminaire
- Minimize internal wiring in combination with 0-10V LED drivers
- With/without Daylight and Occupancy Sensor
- Bluetooth NLC
- Control of 0-10V LED drivers
- Works with Inventronics Hubsense


Safety Certifications



EAN	Product Name
6937186115959	B NLC A OF LI
6937186115973	B NLC A HB LI
6937186115997	B NLC A LI R

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Bluetooth NLC 220-240 LS/PD CI

Advantages

- Presence detection via passive IR element
- Detection height up to 4 meter
- Bluetooth NLC enabled by Silvar
- Suitable for up to 16 DALI-2 LED drivers (Part - 207) in broadcast mode
- Ambient light dependent control and presence detection
- Shutter included to optimize sensor detection
- Simplified mounting for flush device boxes
- Large motion detection range

Safety Certifications



EAN	Product Name
6977078990400	B NLC 220-240 LS/PD CI

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



SOFTWARE

Software

Overview

Inventronics offers a comprehensive range of professional software solutions to support and configure its components.



T4T



Apps



Tuner4TRONIC

A software suite for OEMs that enables the configuration of all programmable OPTOTRONIC, ICUTRONIC, QUICKTRONIC, and POWERTRONIC LED drivers during the luminaire manufacturing process.



DALI PRO PC TOOL

Software for configuring DALI installations in combination with the DALI PROFESSIONAL control unit DALI PRO C-4 RTC or DALI PRO 2 IoT. DALI PRO 2 IoT is an innovative lighting management control technology for the IoT era.



DALI Wizard

A GUI tool for setting up, analyzing, and diagnosing DALI ECG installations, used in combination with the DALI Wizard control device.



BT Config

An app that offers standalone component detection and automatic light calibration, eliminating the need for manual commissioning and adjustments of daylight-dependent controls.



BT Control

Allows the control of DALI-enabled luminaires via a smartphone, including light level and color temperature adjustments, as well as the storage of individual lighting scenes.



DALI PRO CONTROL

Easily manage complex lighting scenarios at a touch: switch or dim lights, change light colors or adjust the color temperature.



HubSense Commissioning

The “HubSense Com” app is a tool to carry out configurations and to test light settings for the installer and the system integrator in order to intuitively commission on site Bluetooth Mesh components (QBM), which are qualified according to the standard.

PROGRAMMING TOOLS

Programming Tools

DALI magic



Features

- USB DALI converter for Tuner4TRONIC and DALI wizard software for Windows PC
- Pushbutton to test DALI dimming without need of connection to computer
- Powered by USB or by included universal power supply
- Integrated automatic DALI supply of up to 64 devices (up to 4 if powered by USB)



Advantages

- Qualified Bluetooth mesh enabled by Silvair
 - Supply voltage: 220 ~ 240 V
 - Line frequency: 0 Hz | 50 Hz | 60 Hz
 - Line voltage: 198 ~ 264 V
 - Lifetime: up to 100,000 h
 - Type of protection: IP20
 - Non-isolated drivers
 - Versatile QBM window driver up to 100 W and 750 mA
 - Fully programmable via software (NFC)
 - Very high efficiency
 - High-quality dimming of 1 ~ 100 % (amplitude and/or PWM selectable by software)
- Higher quality of light thanks to < 1% output ripple current
 - Fulfils safety requirement due to overload, overtemperature
 - Hot Plug protection

Dimming Functions

Bluetooth NLC

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
4062172267373	OT Wi 35/220-240/400 D NFC BL L	4 ~ 38	75 ~ 400	54 ~ 240	92%	280 x 30 x 21
4062172267397	OT Wi 75/220-240/550 D NFC BL L	6.5 ~ 75	125 ~ 550	54 ~ 240	93%	280 x 30 x 21
4062172267410	OT Wi 100/220-240/750 D NFC BL L	5.4 ~ 100	100 ~ 750	54 ~ 260	94%	280 x 30 x 21

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Input voltage: 220 ~ 240Vac
- Wide Output current range
- Fully programmable DALI/NFC
- Low THD <5%@ full load
- Wide ambient temp range
- Support DALI parts -251, -252, -253
- Wide output voltage range
- CLO – Constant Lumen Output
- Very high efficiency up to 96%
- 100'000 h lifetime at max tc
- 5 years guarantee
- Suitable for Emergency Lighting
- Improved Efficiency and Power factor at partial loads
- Wide operating range adjustable via DALI or NFC*
- CLO integrated for maximizing energy savings
- Small, slim white metal housing
- One version to machth multiple power applications with improved product performance and drivers per Circuit
- Braker, reducing the need of various SKUs.
- The 75W version can be used to replace 75/60/35/25W applications with equivalent or better performance.
- Same for 150W version to match 150/100/90W ones.
- Programmable Hybrid dimming 1-100%

About OTi DALI NFC L HE

OPTOTRONIC Linear DALI, Non-isolated, High Efficiency Power Supply is the ideal choice for linear and area fixtures for office - industrial - shop lighting requiring very high conversion efficiency, extended operative window with excellent Harmonic Distortion and Power Factor in all working conditions, dimmable via DALI interface including parts 251,252,253 for monitoring Luminaire, Energy and Diagnostic data.

Dimming Functions

DALI-2

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186150226	OTi DALI 75/220-240/550 N NFC L HE	3 ~ 75	35 ~ 550	54 ~ 240	96%	280x30x16
6937186150240	OTi DALI 150/220-240/1A0 N NFC L HE	6 ~ 150	100 ~ 1000	54 ~ 300	96%	360x30x21

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.



Advantages

- Qualified Bluetooth mesh enabled by Silvair
- Works with HubSense®
- Supply voltage: 220 ~ 240 V
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Line voltage: 198 ~ 264 V
- Lifetime: up to 100,000 h
- Type of protection: IP20
- Integrated cable clamp for luminaire and independent installation
- Small housing for flexible luminaire designs
- Versatile QBM window driver due to flexible output characteristic
- Easy and fast output current setting via NFC
- Very high efficiency
- High-quality dimming of 1 ~ 100 % by amplitude dimming

Dimming Functions

Bluetooth NLC

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770431683	OT Wi 15/220-240/1A0 NFC BL LPI	3 ~ 18	150 ~ 1050	10 ~ 54	87%	150 x 42.5 x 22
6977770431706	OT Wi 25/220-240/700 NFC BL LPI	3.6 ~ 27	180 ~ 700	10 ~ 54	88%	151 x 42.5 x 22
6977770431720	OT Wi 40/220-240/1A0 NFC BL LPI	7 ~ 38	350 ~ 1050	10 ~ 54	88%	152 x 42.5 x 22

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Supply voltage: 220 ~ 240 V
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Line voltage: 198 ~ 264 V
- According to EN 61347-1, 61347-2-13, 62384
- RI suppression: to EN 55015/CISPR 15
- Immunity according to EN 61547
- Lifetime: up to 100,000 h
- Type of protection: IP20
- Versatile DALI window driver due to flexible output
- Integrated DEXAL Bus power supply for sensors and wireless radios
- Design for wireless lighting control system and sensors
- Locking and unlocking of luminaire/driver data
- Advanced luminaire/driver data for analytics
- D4i certified incl. Parts 250, 251, 252, 253
- Easy and fast output current setting via NFC
- High-quality dimming of 1 ~ 100 % by amplitude dimming

- Suitable for emergency Installations (acc. to EN 60598-2-22 and IEC 61347-2-13,appendix J)
- Feedback of power consumption and operating hours
- Suitable for buildings according to EPBD/BREEAM/LEED

Dimming Functions

DALI-2

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770437920	OTi DX 25/220-240/700 NFC	7 ~ 27	180 ~ 700	15 ~ 54	88%	103 x 67 x 29.5
6977770437944	OTi DX 35/220-240/1A0 NFC	14 ~ 35	350 ~ 1050	15 ~ 54	90%	103 x 67 x 29.5
6977770437968	OTi DX 50/220-240/1A4 NFC	55	600 ~ 1400	15 ~ 54	91%	110 x 75 x 25

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Line frequency: 0 Hz | 50 Hz | 60 Hz
 - Versatile DALI window driver up to 50 W due to flexible output characteristic
 - Supply voltage: 220 ~ 240 V
 - Available with output current range: up to 1,400 mA
 - Constant Lumen Output (CLO)
 - Integrated customizable thermal management (Driver Guard)
 - Fully programmable via software (DALI Interface, NFC)
 - Advanced luminaire/driver data (power, energy, operating hours...) for analytics
 - DALI-2 certified incl. Parts 251, 252, 253
 - High-quality dimming of 1 ~ 100 % by amplitude dimming
 - Higher quality of light thanks to 3% output ripple current
 - Very high efficiency
- Very low standby power consumption: 0.15 W *
 - Fulfill safety requirement due to overload, overtemperature, Hot Plug protection

Dimming Functions

DALI-2


Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186106582	OTi DALI 25/220-240/700 NFC L	2 ~ 28	100 ~ 700	15 ~ 54	90%	280 x 30 x 21
6937186106605	OTi DALI 35/220-240/1A0 NFC L	4 ~ 37	200 ~ 1050	15 ~ 54	91%	281 x 30 x 21
6977078993401	OTi DALI 50/220-240/1A4 NFC L	12 ~ 54	400 ~ 1400	15 ~ 54	91%	282 x 30 x 21
6937186106629	OTi DALI 80/220-240/2A1 NFC L	32 ~ 80	600 ~ 2100	20 ~ 54	91%	360 x 30 x 21
Lack of new code	OTi DALI 100/220-240/750 D NFC L	5.4 ~ 100	100 ~ 750	54 ~ 260	94%	283 x 30 x 21

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data

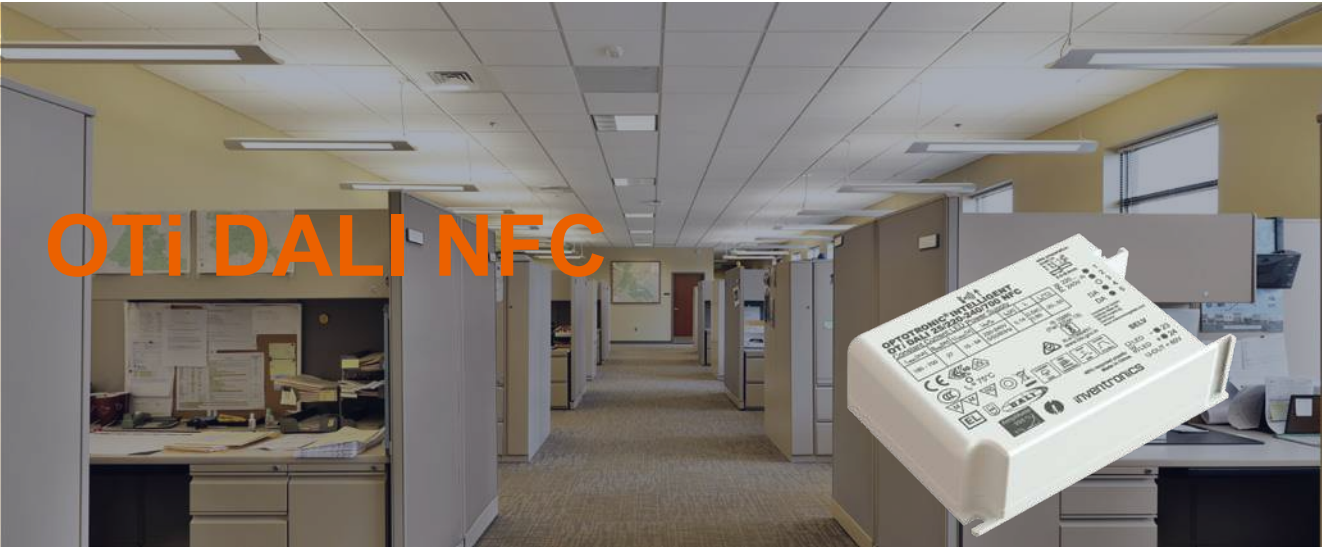

Product Features

- Supply voltage: 220 ~ 240 V
 - Line frequency: 0 Hz | 50 Hz | 60 Hz
 - Line voltage: 198 ~ 264 V
 - According to EN 61347-1, 61347-2-13, 62384
 - RI suppression: to EN 55015/CISPR 15
 - Immunity according to EN 61547
 - Lifetime: up to 100,000 h
 - Type of protection: IP20
 - Versatile DALI window driver due to flexible output
 - Locking and unlocking of luminaire/driver data
 - Advanced luminaire/driver data (power, energy, operating hours...) for analytics
 - DALI-2 certified incl. Parts 251, 252, 253
 - Easy and fast output current setting via NFC Very high efficiency
 - High-quality dimming of 1 ~ 100 % by amplitude dimming
- Suitable for emergency Installations (acc. to EN 60598-2-22 and IEC 61347-2-13,appendix J) thanks to DC detection (0 Hz, pulsating DC), on/off switchable Feedback of power consumption and operating hours
 - Suitable for buildings according to EPBD/BREEAM/LEED due to automatic Constant Lumen Output setting

Dimming Functions

DALI-2

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
4062172250269	OTi DALI 10/220-240/700 NFC	1.5 ~ 10	150 ~ 700	2.5 ~ 45	82%	124 x 31 x 21
6937186107749	OTi DALI 15/220-240/1A0 NFC	3 ~ 18	150 ~ 1050	7.5 ~ 54	88%	95 x 53 x 30
6937186103741	OTi DALI 25/220-240/700 NFC	7 ~ 27	180 ~ 700	15 ~ 54	88%	103 x 67 x 29.5
6977770437821	OTi DALI 35/220-240/1A0 NFC	14 ~ 35	350 ~ 1050	15 ~ 54	90%	104 x 67 x 29.5
6977770437906	OTi DALI 50/220-240/1A4 NFC	55	600 ~ 1400	15 ~ 54	91%	110 x 75 x 25

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advatanges

- DALI-2 certified
- 2 independent channels
- Lamp Failure detection
- CLASS II independent housing
- Smart Power Supply
- SELV, Vout: 24,2 V
- ta range -20 ~ +50°C
- Very low min dimming level: 1%
- Mains voltage: 220 ~ 240 Vac
- 50'000 h lifetime at max tc
- 5 years guarantee
- IP20 independent housing
- Touch-DIM and corridor compatibility
- Overload/Over temperature and Short circuit protection
- Dimmable via DALI, 0-10V, Touch-Dim or corridor
- 24.2 V nominal output + 1.5 V adjustable
- CC mode for 18 ~ 24 V output option

EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186142214	IT D0 36/220-240/24 C UNV1	36	not relevant	24	85%	240 x 60 x 25
6937186142238	IT D0 75/220-240/24 C UNV1	75	not relevant	24	88%	275 x 60 x 25
6937186142252	IT D0 150/220-240/24 C UNV1	150	not relevant	24	90%	320 x 60 x 30
6937186142276	IT D0 200/220-240/24 C UNV1	200	not relevant	24	92%	320 x 60 x 30
6937186142290	IT D0 36/220-240/24/2C C TW UNV1	36	not relevant	24	85%	240 x 60 x 25
6937186142313	IT D0 75/220-240/24/2C C TW UNV1	75	not relevant	24	88%	275 x 60 x 25
6937186142337	IT D0 150/220-240/24/2C C TW UNV1	150	not relevant	24	90%	320 x 60 x 30
6937186142351	IT D0 200/220-240/24/2C C TW UNV1	200	not relevant	24	92%	320 x 60 x 30

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.



Advantages

- Dimmable via Touch DIM
- Dimming range: 0.1 ~ 100 %
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- IP rating: IP20
- Suitable for use in luminaires of protection class I and II
- Intelligent power matching thanks to Smart power supply
- 50 m load cable with EMI validated
- Form factor for mounting on the cove or in luminaires
- No stroboscopic effect thanks to patented high PWM frequency management (> 2 kHz)
- Suitable for installation in emergency lighting systems according to EN 60598-2-22
- DALI message detection ""LED Module failure""
- DALI part 251-252-253

About OTi DALI 48V 1CH

Constant voltage indoor dimmable LED drivers, independent housing for installation freedom on any surfaces, Allows to dim 48V constant voltage LED modules via DALI.

Dimming Functions

DALI-2

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770432499	OTi DALI 160/220-240/48 1CH	0 ~ 160	not relevant	48.2	95%	33.5 x 26.8 x 16.7

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.



Advantages

- 50, 80, 160 W / 24 V LED drivers, multichannel output
- Lighting wireless Bluetooth Mesh network
- Different light profiles to customize the application
- Power supply and control of white, Tunable White, Tunable Warm White, Dim to Warm
- Power supply and control of RGB and RGBW LED modules (only 50 W and 80 w)
- Driver with integrated CASAMBI lighting control system
- Slim form factor for installation in light boxes
- No stroboscopic effect thanks to patented high PWM frequency management (> 2 kHz).

About OT Wi 24V CA

Optotronic Wireless Intelligent Constant Volgate drivers with CASAMBI control, up to 4 output channel for diffenernt LED module control (White, monochrome, TW, RGBW). Inndependent housing for installation freedom on any surfaces.

Dimming Functions

Bluetooth Casambi

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186115195	OT WI 50/220-240/24 4CH CA	50	Not relevant	24.2	92%	346 x 32 x 22
6937186115171	OT WI 80/220-240/24 4CH CA	80	Not relevant	24.2	93%	346 x 32 x 22
6937186115218	OT WI 160/220-240/24 2CH CA	160	Not relevant	24.2	93%	300 x 50 x 32

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Power Level: 20W, 25W, 30W, 40W, 85W
- Current Range: extended output current range
- Surge: 2 / 4 kV
- IP Rating: IP20
- Dimming: 1% dimming capability with Dim to Off | 0...10V
- PWM dimming
- 1% dimming capability with Dim to Off
- Programming via Inventronics PC programmer / Tuner4TRONIC
- Very low ripple for high lighting quality
- 12V Aux included
- Long lasting and high reliability
- UL Class 2

Dimming Functions

0 ~ 10V / PWM

Safety Certifications



More Technical Data





Advantages

- Supply voltage: 220 ~ 240 V
- Fixed output (no dimming)
- Line frequency: 50 Hz | 60 Hz
- Line voltage: 198 ~ 264 V
- According to EN 61347-1, 61347-2-13, 62384
- Line harmonics according to EN 61000-3-2
- Immunity according to EN 61547 SELV
- Versatile scope of application due to output power range of up to 42 W
- Higher quality of light thanks to 5% output ripple current
- High efficiency
- High compatibility with COBs and discrete LEDS

Dimming Functions

N/A

Safety Certifications



More Technical Data



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770430396	ELEMENT 6/220-240/150	3.6 ~ 6.3	150	24 ~ 42	80%	90 x 43 x 22
6977770430419	ELEMENT 8/220-240/200	4.8 ~ 8.4	200	24 ~ 42	82%	90 x 43 x 22
6977770430433	ELEMENT 10/220-240/250	6 ~ 10.5	250	24 ~ 42	84%	90 x 43 x 22
6977770430211	ELEMENT 12/220-240/300	7.2 ~ 12.6	300	24 ~ 42	85%	90 x 43 x 22
6977770430235	ELEMENT 15/220-240/350	8.4 ~ 14.7	350	24 ~ 42	85%	90 x 43 x 22
6977770430259	ELEMENT 20/220-240/500	10.5 ~ 20	500	21 ~ 40	87%	103 x 43 x 29
6977770430273	ELEMENT 25/220-240/600	12.6 ~ 24	600	21 ~ 40	87%	103 x 43 x 29
6977770430297	ELEMENT 30/220-240/700	14.7 ~ 28	700	21 ~ 40	88%	103 x 43 x 29
6977770430310	ELEMENT 33/220-240/800	16.8 ~ 32	800	21 ~ 40	88%	103 x 43 x 29
6977770430334	ELEMENT 35/220-240/900	18.9 ~ 36	900	21 ~ 40	89%	103 x 43 x 29
6977770430358	ELEMENT 38/220-240/950	20 ~ 38	950	21 ~ 40	89%	103 x 43 x 29
6977770430372	ELEMENT 42/220-240/1050	22 ~ 42	1050	21 ~ 40	89%	103 x 43 x 29

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.



Advantages

- Dip switch for 4 output currents per model
- High light quality thanks to low ripple
- PF>0.95, Low THD<10% @ full load
- Excellent price/quality/watt ratio
- Suitable for Class I luminaires

Dimming Functions

N/A

Safety Certifications



Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
EM FIT 18/220-240/0A35/N CS L	18	200/250/300/350	24 ~ 54	87%	168 x 30 x 21
EM FIT 40/220-240/0A35/N CS L	40	200/250/300/350	40 ~ 120	90%	168 x 30 x 21
EM FIT 60/220-240/0A35/N CS L	60	200/250/300/350	90 ~ 175	90%	168 x 30 x 21
EM FIT 75/220-240/0A55/N CS L	75	350/400/500/550	90 ~ 216	91%	210 x 30 x 21
EM FIT 18/220-240/0A35 CS L	18	200/250/300/350	27 ~ 51	87%	168 x 30 x 21
EM FIT 40/220-240/0A8 CS L	40	500/600/700/800	27 ~ 51	90%	168 x 30 x 21
EM FIT 60/220-240/1A2 CS L	60	900/1050/1100/1200	27 ~ 51	90%	210 x 30 x 21
EM FIT 75/220-240/1A6 CS L	75	1300/1400/1500/1600	27 ~ 51	91%	280 x 30 x 21



Product Family Features

- Dip switch for 4 output currents per model
- High light quality thanks to low ripple
- PF>0.95, Low THD<10% @ full load
- Excellent price/quality/watt ratio
- CCT selection
- Suitable for Class I luminaires

Dimming Functions

N/A

Safety Certifications



Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
EM FIT 18/220-240/0A35/N CS L CCT	18	350	24 - 54	87%	168 x 30 x 21
EM FIT 40/220-240/0A35/N CS L CCT	40	350	40 - 120	90%	168 x 30 x 21
EM FIT 60/220-240/0A35/N CS L CCT	60	350	90 - 175	90%	168 x 30 x 21
EM FIT 75/220-240/0A55/N CS L CCT	75	550	90 - 216	91%	210 x 30 x 21



Advantages

- Module efficacy: up to 173 lm/W
- Available with luminous flux: 245 lm on 62 mm, 275 lm on 70 mm
- Available with luminous flux: 1,100 lm or 2,000 lm on 280 mm
- Available with luminous flux: 2,200 lm or 4,000 lm on 560 mm
- Color rendering index: 90
- High initial color consistency: ≤ 3 SDCM
- Average lifetime (L80 B50): 70,000 h (temperature at $T_c = 50^\circ\text{C}$)
- CE marked, ENEC certified; UL listed
- Slim luminaire design by small and flexible form factor
- High homogeneity thanks to small LED pitch
- High voltage (HV) optimized for non-isolated, low voltage (LV) optimized for SELV operation
- Adjustable luminous flux, efficacy and lifetime
- Direct the light where it's needed while using PrevaLED
- Linear Optics

Safety Certifications



More Technical Data



Advantages

- Color consistency 2 SDCM
- TM30 compliant
- High flux output up to 1500 lm
- Beam angle: 15°, 24°, 40°
- Type of protection: IP20
- Compatible with conventional MR16 lamps
- Precise optical control and free from multi-shadow issue
- Replaceable front cover to maximize optics flexibility and future extension
- Dual mode options in High-Output (HO) and High-Efficacy (HE)

Safety Certifications



More Technical Data





Advantages

- Qualified Bluetooth mesh wireless control
- Dimming range: 1 ~ 100 %
- Designed for wall and ceiling luminaires with diffuse light distribution
- Low-cost LED replacement of CFL wall-, and ceiling luminaires
- Driver integrated on LED board
- Lifetime (L70/B50): 50,000 h
- LED module is reinforced isolated to mounting surface
- Photobiological safety according to IEC/TR 62778, risk group RG1
- Touch protection accessory for simple use in luminaires
- High reliability
- Easy to use
- Optimised design for simple thermal management
- Enables thin and efficient luminaire designs
- High quality of light thanks to low modulation
- 5 year guarantee

Safety Certifications



More Technical Data





Light is experience!

Whether it's a boutique store or a luxury home, by selecting our cutting-edge technology, including superior dimming capabilities, tuneable white technology, and smart controls, you allow your lighting solutions to seamlessly adjust to various needs and preferences,

Expertise

Shops and residential environments requires linear, surface, and spot-lighting sources to create a desired mood & experience. Choose our lighting systems to ensure you get the most valuable and advanced benefits in the market:



Miniaturized systems



Smart light control




Efficient color rendering

System Value

- Compact components making use of state-of-the-art technology.
- Highest light uniformity and outstanding color temperature across the full portfolio.
- Full dimming functionality with precise resolution and uniformity across multiple light sources at any dimming level.
- Sophisticated (while simple to use) lighting controls and sensors for wired or wireless system scalability and smart illumination.
- Best in class levels of efficiency and durability, making our system a building block for sustainability in any lighting project.
- Global technical service and component customization to support your designs and prestigious lighting projects, anywhere.

Lighting System Solutions

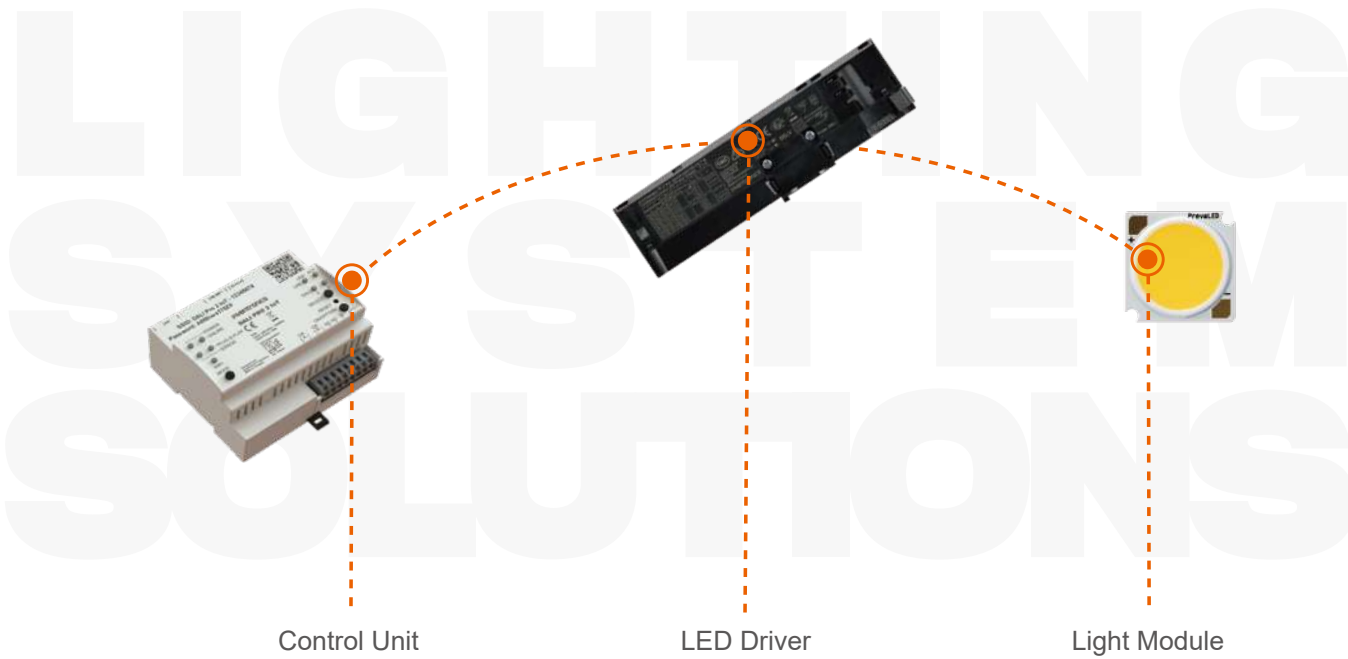

Sub-applications



Retail



Hospitality



Residential

Inventronics Cases

The ultimate courtyard combining
life, nature, and art.
*The Courtyard, Oxfordshire,
UK*



Craft a shopping paradise
blending luxury with warmth.
*Marina Mall – Abu Dhabi,
UAE*





01 Controls, Sensors, Programming tools & Accessories

1.1 DALI	DALI PRO 2 IoT	225
	DALI MCU TW G2	226
	DALI ECO BT RTC	227
	DALI-2 SENSOR LS/PD HB LI	228
	DALI-2 REP LI	229
1.2 Bluetooth NLC	Bluetooth NLC D4i Module Indoor	230
	Bluetooth NLC 0-10 Module Indoor	231
	Bluetooth NLC 220-240 LS/PD CI	232
1.3 Software	Tuner4TRONIC	233
	DALI PRO PC TOOL	233
	DALI Wizard	233
	LUXeye Config	233
	LUXeye App Control	233
	BT Config	233
	BT CONTROL	233
	DALI PRO CONTROL	234
	HubSense Commissioning	234
1.4 Programming Tools	DALI magic	234

02 LED Driver & Accessories

2.1 Connected - Constant Current	OT WI D NFC BL L	235
	OT WI NFC BL LPI	236
	OTi DALI NFC T	237
	OTi DALI NFC L	238
	OTi DALI NFC LP	239
	OT WI NFC CA T	240
2.2 Connected - Constant Voltage	OTi DALI 24V 4CH P	241
	OTi DALI 24V	242
	OT WI DIM 5CH CA	243
	IT D0 24V 1CH - 2CH	244
	OTi DALI 48V 1CH	245
	OT Wi 24V CA	246
2.3 Simple DIM - Constant Current	OT FIT CS PC	247
	LUM-MTx	248

2.4 Simple DIM - Costant Voltage	OT DIM 24V P (1...10V)	249
	OT DMX DIM 5CH	250
	OT PC 24V	251
	IT D0P 12-48V	252
2.5 Non Dimmable - Costant Current	OT FIT N NFC L HE	253
	OT FIT CS MINI	254
	IT FIT CS T	255
	IT FIT CS TI	256
	EM FIT (N) CS L	257
	EM FIT N CS L CCT	258
	ELEMENT	259
2.6 Non Dimmable - Costant Voltage	OT 24V P	261
	OT FIT 24V P	262
	OT FIT 12V P	263
	IT FIT 24V	264
	OT SLIM 24V	265

03 Light Modules & Accessories

3.1 Rigid	PrevaLED Linear G6	266
	PrevaLED Core G8	267
	PrevaLED COIN 50 COB G2	268
3.2 Flexible	LINEARlight FLEX Infinite IP00	269
	LINEARlight FLEX Infinite Protect	270
	LINEARlight FLEX Uniformity	271
	BASIC FLEX Shortpitch	272
	LINEARlight FLEX Colormix	273
	LINEARlight FLEX Tunable White IP00	274
	LINEARlight FLEX Tunable White Protect	275
	LINEARlight FLEX Diffuse TOP	276
	LINEARlight FLEX Diffuse SIDE	277
	TEC FLEX DIFFUSE RGBW addressable TOP	278
	TEC FLEX DIFFUSE RGBW addressable SIDE	279





Advantages

- DALI-2 certified
- IoT ready with built-in gateway for remote data access
- Easy browser-based commissioning UI and Professional Software available
- Small form factor: only 6 TE (DIN rail)
- Commissioning via Ethernet/WLAN
- DALI-2 certified for improved multi-vendor interoperability
- Template based onsite commissioning via Smart device
- Building Management System integration via optional KNX interface
- Remote access for changes in the configuration from every location
- LAN Interconnect to connect up-to 8 Controllers into one network
- Rest API for connection of a 3rd party Cloud with the DALI Pro 2 IoT Controller
- Automated testing and reporting of emergency lighting installations
- Daylight Simulation via scene recall and/or light sensor regulation

Safety Certifications



EAN	Product Name
6977078993692	DALI PRO 2 IOT

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Up to 4 DALI PCU TW G2 can be connected in parallel to set up multiple control points
- Automatic synchronization between the control points
- Cover and rotary switch in neutral white
- Length of the DALI control cable: up to 300 m
- Intuitive manual dimming, switching and changing of colour temperature
- Individual setting of minimal brightness level
- Individual setting of colour temperature range

Safety Certifications



EAN	Product Name
6977078993777	DALI MCU TW G2

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Compact light control with DALI interface
 - Smart phone connection via Bluetooth® to control and configure
 - Integrated clock for time based control of brightness and color temperature (HCL)
 - Adaptable HCL curve with up to 24 points
 - One DALI output channel (Broadcast or Groupcast)
 - Up to 32 DALI luminaires connectable
 - Supports up to 4 OSRAM DALI sensors and pushbutton couplers
 - Daylight-dependent regulation and presence-dependent control of light
 - Pushbutton interface to separately control brightness and color temperature
 - Daytime depending change of brightness and color temperature (HCL)
 - Suitable for Human Centric Lighting Applications (HCL)
 - Control the light via Smartphone
 - Adjustment of all settings via smartphone
- Up to 4 timers with ON-/OFF-Time and weekday configurable
 - Simplified startup thanks to predefined operation modes
 - Intuitive manual dimming, switching and changing of colour temperature
 - Up to 4 groups separatly controllable
 - Adjustable Offset for different groups
 - Easy Scene creation via App
 - Firmware update over-the-air via Bluetooth possible
 - Integrated DALI supply
 - Control of standard white or Tunable White light acc.
 - DALI device type 8 (DT8)
 - Selected DALI parameters changeable via APP


Safety Certifications



EAN	Product Name
6977078993753	DALIECO BT RTC CONTROL

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data

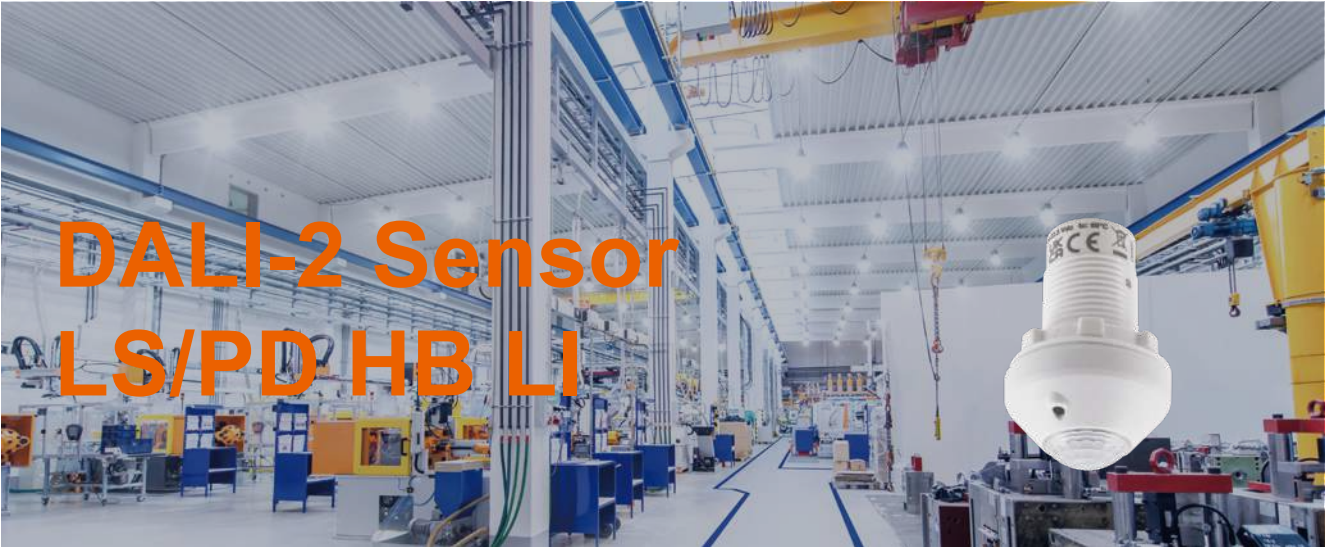

Advantages

- Light and motion sensor for luminaire installation
 - Motion detection via passive IR element
 - Light sensor operating range: 5 ~ 2000 lx (measured at sensor)
 - Detection height up to 17 m
 - Function indicator LED
 - Intended for installation into a standard ½" knockout
 - Design freedom due to compact size
 - Protection Class IP65 (In installed condition)
 - Easy to integrate in luminaire
- DALI-2 certified
 - DALI Bus powered (No mains connection necessary)
 - Multiple sensors connectable to the same DALI line
 - Shutter included to optimize sensor detection
 - Integreatable in light- and building management systems supporting DALI-2 sensors

EAN	Product Name
6977078993791	DALI-2 SENSOR LS/PD HB LI

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





DALI-2 REP LI

Advantages

- Expansion of DALI systems by 64 DALI control gears each time
- Extends the DALI line by 300 m
- Maximum power consumption in stand-by mode: 1 W
- Four versatile operating modes: Basic, Group, Extend, Touch DIM
- Basic mode: DALI-2 certified DALI converter for grouping up to 64 standard DALI drivers.
- Group mode: Groups up to 64 DALI drivers and up to 5 Inventronics DALI-2 sensors.
- Group mode: Supports standard DALI drivers and DALI-DT8 drivers (TW / RGB (W)).
- Touch DIM mode: Simple switching and dimming of up to 64 drivers.
- Powerful power supply: 130 mA DALI bus power supply
- Can be addressed via DALI

Safety Certifications



EAN	Product Name
6937186116437	DALI-2 REP LI

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Bluetooth NLC D4i Module Indoor

Advantages

- With/without Daylight and Occupancy Sensor D4i Module
- Bluetooth NLC enabled by Silvair
- Control of D4i drivers or DALI drivers with additional DALI bus power supply
- Intended for installation into a standard 1/2" knockout
- Works with Hubsense®
- Standard communication protocol released by Bluetooth SIG
- Design freedom due to compact size
- Easy to integrate in luminaire
- Minimize internal wiring in combination with D4i drivers
- Secured product communication granted by ioXT and PSA Certificates

Safety Certifications



EAN	Product Name
6977078990363	B NLC D HB LI
6977078990387	B NLC D LI R
6977078990448	B NLC D MB LI
6977078990462	B NLC D LB LI
6977078993425	B NLC D OF LI BK
6977078997041	B NLC D OF LI S
6977078997553	B NLC D OF LI

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Bluetooth NLC 0-10 Module Indoor

Advantages

- Design freedom due to compact size
- Easy to integrate in luminaire
- Minimize internal wiring in combination with 0-10V LED drivers
- With/without Daylight and Occupancy Sensor
- Bluetooth NLC
- Control of 0-10V LED drivers
- Works with Inventronics Hubsense

Safety Certifications



EAN	Product Name
6937186115959	B NLC A OF LI
6937186115973	B NLC A HB LI
6937186115997	B NLC A LI R

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Bluetooth NLC 220-240 LS/PD CI

Advantages

- Presence detection via passive IR element
- Detection height up to 4 meter
- Bluetooth NLC enabled by Silvair
- Suitable for up to 16 DALI-2 LED drivers (Part - 207) in broadcast mode
- Ambient light dependent control and presence detection
- Shutter included to optimize sensor detection
- Simplified mounting for flush device boxes
- Large motion detection range

Safety Certifications



EAN	Product Name
6977078990400	B NLC 220-240 LS/PD CI

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



SOFTWARE

Software

Overview

Inventronics offers a comprehensive range of professional software solutions to support and configure its components.



T4T



Apps



Tuner4TRONIC

A software suite for OEMs that enables the configuration of all programmable OPTOTRONIC, ICUTRONIC, QUICKTRONIC, and POWERTRONIC LED drivers during the luminaire manufacturing process.



DALI PRO PC TOOL

Software for configuring DALI installations in combination with the DALI PROFESSIONAL control unit DALI PRO C-4 RTC or DALI PRO 2 IoT. DALI PRO 2 IoT is an innovative lighting management control technology for the IoT era.



DALI Wizard

A GUI tool for setting up, analyzing, and diagnosing DALI ECG installations, used in combination with the DALI Wizard control device.



LUXeye Config

Provides full access to all LUXeye product configuration parameters via Bluetooth, facilitating commissioning with predefined profiles and integrated reporting functions.



LUXeye Control

Enables switching and dimming of lights via the app, with active sensors automatically controlling the lighting. These software solutions help users efficiently to configure and control Inventronics components.



BT Config

An app that offers standalone component detection and automatic light calibration, eliminating the need for manual commissioning and adjustments of daylight-dependent controls.



BT Control

Allows the control of DALI-enabled luminaires via a smartphone, including light level and color temperature adjustments, as well as the storage of individual lighting scenes.

PROGRAMMING TOOLS

Programming Tools



DALI PRO CONTROL

Easily manage complex lighting scenarios at a touch: switch or dim lights, change light colors or adjust the color temperature.



HubSense Commissioning

The "HubSense Com" app is a tool to carry out configurations and to test light settings for the installer and the system integrator in order to intuitively commission on site Bluetooth Mesh components (QBM), which are qualified according to the standard.

DALI magic



Features

- USB DALI converter for Tuner4TRONIC and DALI wizard software for Windows PC
- Pushbutton to test DALI dimming without need of connection to computer
- Powered by USB or by included universal power supply
- Integrated automatic DALI supply of up to 64 devices (up to 4 if powered by USB)



Advantages

- Qualified Bluetooth mesh enabled by Silvair
 - Supply voltage: 220 ~ 240 V
 - Line frequency: 0 Hz | 50 Hz | 60 Hz
 - Line voltage: 198 ~ 264 V
 - Lifetime: up to 100,000 h
 - Type of protection: IP20
 - Non-isolated drivers
 - Versatile QBM window driver up to 100 W and 750 mA
 - Fully programmable via software (NFC)
 - Very high efficiency
 - High-quality dimming of 1 ~ 100 % (amplitude and/or PWM selectable by software)
- Higher quality of light thanks to < 1% output ripple current
 - Fulfils safety requirement due to overload, overtemperature
 - Hot Plug protection

Dimming Functions

Bluetooth NLC

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
4062172267373	OT Wi 35/220-240/400 D NFC BL L	4 ~ 38	75 ~ 400	54 ~ 240	92%	280 x 30 x 21
4062172267397	OT Wi 75/220-240/550 D NFC BL L	6.5 ~ 75	125 ~ 550	54 ~ 240	93%	280 x 30 x 21
4062172267410	OT Wi 100/220-240/750 D NFC BL L	5.4 ~ 100	100 ~ 750	54 ~ 260	94%	280 x 30 x 21

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Qualified Bluetooth mesh enabled by Silvair
- Works with HubSense®
- Supply voltage: 220 ~ 240 V
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Line voltage: 198 ~ 264 V
- Lifetime: up to 100,000 h
- Type of protection: IP20
- Integrated cable clamp for luminaire and independent installation
- Small housing for flexible luminaire designs
- Versatile QBM window driver due to flexible output characteristic
- Easy and fast output current setting via NFC
- Very high efficiency
- High-quality dimming of 1 ~ 100 % by amplitude dimming

Dimming Functions

Bluetooth NLC

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770431683	OT Wi 15/220-240/1A0 NFC BL LPI	3 ~ 18	150 ~ 1050	10 ~ 54	87%	150 x 42.5 x 22
6977770431706	OT Wi 25/220-240/700 NFC BL LPI	3.6 ~ 27	180 ~ 700	10 ~ 54	88%	151 x 42.5 x 22
6977770431720	OT Wi 40/220-240/1A0 NFC BL LPI	7 ~ 38	350 ~ 1050	10 ~ 54	88%	152 x 42.5 x 22

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Supply voltage: 220 ~ 240 V
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Line voltage: 198 ~ 264 V
- Lifetime: up to 100,000 h
- Type of protection: IP20
- High quality of light thanks to low output ripple current
- Short housing for minimum distance between spotlights
- Versatile DALI window driver due to flexible output characteristic
- Easy and fast output current setting via NFC
- High-quality dimming of 1 ~ 100 % by amplitude dimming
- DALI-2 certified incl. Parts 251, 252, 253
- Touch DIM application: easy to control via pushbutton or sensor
- SELV system

EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186108944	OTi DALI 40/220-240/1A0 NFC T-B	2.7 ~ 40	150 ~ 1050	18 ~ 42	86%	205 x 31 x 44
6937186108982	OTi DALI 40/220-240/1A0 NFC T-G	2.7 ~ 40	150 ~ 1050	18 ~ 42	86%	205 x 31 x 49.9
6937186108968	OTi DALI 40/220-240/1A0 NFC T-W	2.7 ~ 40	150 ~ 1050	18 ~ 42	86%	205 x 31 x 44

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Versatile DALI window driver up to 50 W due to flexible output characteristic
- Supply voltage: 220 ~ 240 V
- Available with output current range: up to 1,400 mA
- Constant Lumen Output (CLO)
- Integrated customizable thermal management (Driver Guard)
- Fully programmable via software (DALI Interface, NFC)
- Advanced luminaire/driver data (power, energy, operating hours...) for analytics
- DALI-2 certified incl. Parts 251, 252, 253
- High-quality dimming of 1 ~ 100 % by amplitude dimming
- Higher quality of light thanks to 3% output ripple current
- Very high efficiency
- Very low standby power consumption: 0.15 W *
- Fulfill safety requirement due to overload, overtemperature, Hot Plug protection

EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186106582	OTi DALI 25/220-240/700 NFC L	2 ~ 28	100 ~ 700	15 ~ 54	90%	280 x 30 x 21
6937186106605	OTi DALI 35/220-240/1A0 NFC L	4 ~ 37	200 ~ 1050	15 ~ 54	91%	281 x 30 x 21
6977078993401	OTi DALI 50/220-240/1A4 NFC L	12 ~ 54	400 ~ 1400	15 ~ 54	91%	282 x 30 x 21
6937186106629	OTi DALI 80/220-240/2A1 NFC L	32 ~ 80	600 ~ 2100	20 ~ 54	91%	360 x 30 x 21
4062172125116	OTi DALI 100/220-240/750 D NFC L	5.4 ~ 100	100 ~ 750	54 ~ 260	94%	283 x 30 x 21

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Supply voltage: 220 ~ 240 V
 - Line frequency: 0 Hz | 50 Hz | 60 Hz
 - Line voltage: 198 ~ 264 V
 - Lifetime: up to 100,000 h
 - Type of protection: IP20
 - Small housing for flexible luminaire designs
 - Versatile DALI window driver due to flexible output characteristic
 - Easy and fast output current setting via NFC
 - Very high efficiency
 - High-quality dimming of 1 ~ 100 % by amplitude dimming
 - DALI-2 certified incl. Parts 251, 252, 253
- Easy to use in corridors and restrooms because of three-level corridor function
 - Thanks to the Touch DIM Application, it is easy to control via the button or sensor

Dimming Functions

DALI-2

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770437623	OTi DALI 15/220-240/1A0 NFC LP	3 ~ 18	150 ~ 1050	10 ~ 54	87.5%	97 x 42.5 x 22
6977770437784	OTi DALI 25/220-240/700 NFC LP	3.6 ~ 27	180 ~ 700	10 ~ 54	88%	97 x 42.5 x 22
6977770437845	OTi DALI 40/220-240/1A0 NFC LP	7 ~ 38	350 ~ 1050	10 ~ 54	88%	97 x 42.5 x 22
6977770437883	OTi DALI 50/220-240/1A4 NFC LP	9 ~ 55	600 ~ 1400	15 ~ 54	90%	103 x 67 x 22.5

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Driver with integrated CASAMBI lighting control system
 - Supply voltage: 220 ~ 240 V
 - Line frequency: 0 Hz | 50 Hz | 60 Hz
 - Line voltage: 198 ~ 264 V
 - Lifetime: up to 100,000 h
 - Type of protection: IP20
 - High quality of light thanks to low output ripple current
 - Short housing for minimum distance between spotlights
 - Versatile CASAMBI window driver due to flexible output characteristic
- Easy and fast output current setting via NFC
 - High-quality dimming of 1 ~ 100 % by amplitude dimming
 - SELV system

Dimming Functions

Bluetooth Casambi

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770437708	OT Wi 40/220-240/1A0 NFC CA T-B	2.7 ~ 40	150 ~ 1050	18 ~ 42	86%	195 x 31 x 44
6977770437722	OT Wi 40/220-240/1A0 NFC CA T-W	2.7 ~ 40	150 ~ 1050	18 ~ 42	86%	195 x 31 x 44
6977770438286	OT Wi 40/220-240/1A0 NFC CA T-G	2.7 ~ 40	150 ~ 1050	18 ~ 42	86%	195 x 31 x 49.9

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- LED driver whose output power can be shared arbitrarily among the 2 or 4 channels
- Dimming range: 0/0, 1 ~ 100 %
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- High level surge protection: up to 6 kV (L-N), 8 kV (L/N-PE)
- Inrush current limiter circuit
- Long lasting and high reliability
- From 1 to 4 channels to arbitrarily distribute the power
- Suitable for installation under sunlight
- IP66/IP67 Salt mist resistant and DC functionality
- AstroDim functionality for automatic dimming and turn on/off

EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
4062172364263	OTi DALI 210/220-240/244CHDT6/8 P	0 ~ 210	8500	24.7	93%	330 x 80 x 47
4062172364324	OTi DALI 100/220-240/244CHDT6/8 P	0 ~ 100	not relevant	24.7	93%	237 x 80 x 40

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Dimmable via Touch DIM
- Available as single-channel or multi-channel with DT6 and DT8 in one device
- Dimming range: 0.1 ~ 100 % (for 50-80-160W) or 1 ~ 100 % (for 30W)
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Intelligent power matching thanks to Smart power supply
- Form factor for mounting on the cove or in luminaires
- No stroboscopic effect thanks to patented high PWM frequency management (2 kHz)
- IP rating: IP20
- Suitable for installation in emergency lighting systems according to EN 60598-2-22

Dimming Functions

DALI-2

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186115119	OTi DALI 30/220-240/24 1CH	30	not relevant	24.2	88%	103 x 67 x 29.5
6977770431881	OTi DALI 50/220-240/24 1CH G3	50	not relevant	24	92%	346 x 32 x 22
6977770431966	OTi DALI 50/220-240/24 4CH DT6/8 G3	50	not relevant	24	92%	347 x 32 x 22
6977770431867	OTi DALI 80/220-240/24 1CH G3	80	not relevant	24	93%	348 x 32 x 22
6977770431942	OTi DALI 80/220-240/24 4CH DT6/8 G3	80	not relevant	24	93%	349 x 32 x 22
6977770431904	OTi DALI 160/220-240/24 1CH G3	160	not relevant	24	93%	300 x 50 x 35
6977770431928	OTi DALI 160/220-240/ 24 2CH DT6/8 G3	160	not relevant	24	93%	301 x 50 x 35

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Wireless 5-channel dimmer, with output voltage of 12, 24 and 48 V
- Control of LED modules up to 12 A
- Wireless module based on Bluetooth Low Energy
- Control of white, Tunable White, RGB, RGBW and RGBTW LED modules
- Independent housing for ceiling installation
- Support of systems based on CASAMBI lighting control solutions
- Minimal installation effort
- Dry contacts for optional connection to any commercial pushbutton

Dimming Functions

Bluetooth Casambi

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186115232	OT Wi DIM 5CH CA	576	not relevant	12 ~ 48	98%	186 x 29 x 22

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advatanges

- DALI-2 certified
- 2 independent channels
- Lamp Failure detection
- CLASS II independent housing
- Smart Power Supply
- SELV, Vout: 24,2 V
- ta range -20 ~ +50°C
- Very low min dimming level: 1%
- Mains voltage: 220 ~ 240 Vac
- 50'000 h lifetime at max tc
- 5 years guarantee
- IP20 independent housing
- Touch-DIM and corridor compatibility
- Overload/Over temperature and Short circuit protection
- Dimmable via DALI, 0 ~ 10V, Touch-Dim or corridor
- 24.2 V nominal output + 1.5 V adjustable
- CC mode for 18 ~ 24 V output option

About IT D0 24V 1CH - 2CH

Constant voltage indoor dimmable LED drivers, independent housing for installation freedom on any surfaces, Available in 1CH or 2CH allows to dim 24V constant voltage LED modules via DALI, 0-10V or Push button also in tunable white Nominal output voltage is 24,2 V with +1,5V adjustable via potentiometer CC mode available for output from 18 to 24 Vdc

Dimming Functions

DALI-2 / 0 ~ 10V / Touch Dim

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186142214	IT D0 36/220-240/24 C UNV1	36	not relevant	24	85%	240 x 60 x 25
6937186142238	IT D0 75/220-240/24 C UNV1	75	not relevant	24	88%	275 x 60 x 25
6937186142252	IT D0 150/220-240/24 C UNV1	150	not relevant	24	90%	320 x 60 x 30
6937186142276	IT D0 200/220-240/24 C UNV1	200	not relevant	24	92%	320 x 60 x 30
6937186142290	IT D0 36/220-240/24/2C C TW UNV1	36	not relevant	24	85%	240 x 60 x 25
6937186142313	IT D0 75/220-240/24/2C C TW UNV1	75	not relevant	24	88%	275 x 60 x 25
6937186142337	IT D0 150/220-240/24/2C C TW UNV1	150	not relevant	24	90%	320 x 60 x 30
6937186142351	IT D0 200/220-240/24/2C C TW UNV1	200	not relevant	24	92%	320 x 60 x 30

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.



Advantages

- Dimmable via Touch DIM
- Dimming range: 0.1 ~ 100 %
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- IP rating: IP20
- Suitable for use in luminaires of protection class I and II
- Intelligent power matching thanks to Smart power supply
- 50 m load cable with EMI validated
- Form factor for mounting on the cove or in luminaires
- No stroboscopic effect thanks to patented high PWM frequency management (> 2 kHz)
- Suitable for installation in emergency lighting systems according to EN 60598-2-22
- DALI message detection ""LED Module failure""
- DALI part 251-252-253

EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770432499	OTi DALI 160/220-240/48 1CH	0 ~ 160	not relevant	48.2	95%	33.5 x 26.8 x 16.7

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

About OTi DALI 48V 1CH

Constant voltage indoor dimmable LED drivers, independent housing for installation freedom on any surfaces, Allows to dim 48V constant voltage LED modules via DALI.

Dimming Functions

DALI-2

Safety Certifications



Advantages

- 50, 80, 160 W / 24 V LED drivers, multichannel output
- Lighting wireless Bluetooth Mesh network
- Different light profiles to customize the application
- Power supply and control of white, Tunable White, Tunable Warm White, Dim to Warm
- Power supply and control of RGB and RGBW LED modules (only 50 W and 80 W)
- Driver with integrated CASAMBI lighting control system
- Slim form factor for installation in light boxes
- No stroboscopic effect thanks to patented high PWM frequency management (> 2 kHz).

About OT Wi 24V CA

Optotronic Wireless Intelligent Constant Volgate drivers with CASAMBI control, up to 4 output channel for differernt LED module control (White, monochrome, TW, RGBW). Independent housing for installation freedom on any surfaces.

Dimming Functions

Bluetooth Casambi

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186115195	OT WI 50/220-240/24 4CH CA	50	75 ~ 400	54 ~ 240	92%	280 x 30 x 21
6937186115171	OT WI 80/220-240/24 4CH CA	80	125 ~ 550	54 ~ 240	93%	280 x 30 x 21
6937186115218	OT WI 160/220-240/24 2CH CA	160	100 ~ 750	54 ~ 260	94%	280 x 30 x 21

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Cable clamp housing for independent mounting
- Dimmable on the leading edge and trailing edge
- Housing for independent installation
- Compatible with the most common leading-edge and trailing-edge phase dimmers
- Flexible current setting (DIPswitch – 2 to 4 currents)
- Flicker-free dimming
- Higher quality of light thanks to 5% output ripple current
- Housing from 80% recycled plastic

Dimming Functions

Phase-Cut

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186111395	OT FIT 7/220-240/180 CS PC	2.7 ~ 7.2	100 ~ 180	27 ~ 40	>79%	130 x 30 x 22.2
6937186111296	OT FIT 14/220-240/350 CS PC	5.4 ~ 14	200 ~ 350	27 ~ 40	>79%	130 x 30 x 22.2
6937186111319	OT FIT 18/220-240/450 CS PC	18	225 ~ 450	27 ~ 40	>82%	95 x 50 x 22
6937186111357	OT FIT 30/220-240/700 CS PC	13.5 ~ 28	500 ~ 700	27 ~ 40	84%	95 x 53 x 30
4052899617261	OT FIT 40/220-240/1A0 CS PC	21.6 ~ 42	800 ~ 1050	27 ~ 40	85%	108 x 67 x 22

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Power Level: 20W, 25W, 30W, 40W, 85W
- Current Range: extended output current range
- Surge: 2 / 4 kV
- IP Rating: IP20
- Dimming: 1% dimming capability with Dim to Off | 0-10V /
- PWM dimming
- 1% dimming capability with Dim to Off
- Programming via Inventronics PC programmer / Tuner4TRONIC
- Very low ripple for high lighting quality
- 12V Aux included
- Long lasting and high reliability
- UL Class 2


Dimming Functions

0 ~ 10V / PWMh

Safety Certifications



More Technical Data





Advantages

- DC mode functionality
- Type of protection: IP66 and IP67
- Surge protection: up to 4 kV (L-N) / 6 kV (L/N-PE)
- Wide operating temperature range: -30 ~ +55 °C
- Lifetime: up to 50,000 h (temperature at max. tc)
- Dimmable via fully isolated 1 ~ 10 V interface
- Large range of products from 20 W to 250 W
- Installation in very cold and hot environments
- Very stable output power
- High electrical reversible short-circuit, overload,
- overtemperature protection

- Smart Power Supply: boosting power to turn on cold LEDs
- Independent installation possible
- Dimming range: 1...100 %

Dimming Functions

1...10V

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770438347	OT 20/220-240/24 DIM P	20	not relevant	24.2	83%	178 x 43 x 25
6977770438361	OT 40/220-240/24 DIM P	40	not relevant	24.2	85%	208 x 43 x 26
6977770438385	OT 60/220-240/24 DIM P	60	not relevant	24.2	87%	208 x 43 x 26
6977770438408	OT 100/220-240/24 DIM P	100	not relevant	24.2	90%	240 x 50 x 34
6977770438422	OT 130/220-240/24 DIM P	130	not relevant	24.2	90.5%	220 x 63 x 37
6977770438446	OT 250/220-240/24 DIM P	250	not relevant	24.2	92%	265 x 68 x 40

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Intelligent DMX dimmer, with output voltage of 12, 24 and 48 V
- Control of LED modules up to 12 A
- RDM functionality for total control in application
- Control of white, Tunable White, RGB, RGBW and RGBTW LED modules
- Independent housing for ceiling installation
- Minimal installation effort
- Selectable PWM frequency

Dimming Functions

DMX

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977078993838	OT DMX DIM 5CH	576	not relevant	12 ~ 48	95%	172 x 42 x 20

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- IP rating: IP20
- High efficiency
- Very stable output power
- High electrical reversible short-circuit, overload, overtemperature protection
- Independent installation possible
- Suitable for luminaires of protection classes I and II
- 24 V constant output voltage SELV
- Wide Ta range -20 ~ +50
- Lifetime: up to 50,000 h(temperature at max.tc)
- Dimming range: 3 ~ 100 % luminous flux
- Recommended to Use Trailing Edge dimmer

EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770438460	OT FIT 36/220-240/24 PC	24.2 ~ 36	not relevant	24.2	85%	103 x 67 x 29.5
6977770438484	OT FIT 75/220-240/24 PC	24.2 ~ 75	not relevant	24.2	92%	110 x 75 x 30
6977770438569	OT FIT 150/220-240/24 PC	60.5 ~ 150	not relevant	24.2	92%	170 x 76 x 30

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- 12-48 V SELV output constant voltage range
- Output power up to 480 W
- 10A handling allowed on one channel
- Overload/Over temperature/Short circuit protection, automatic, reversible 50.000h at tc max*
- *10% cumulated failure
- Screw terminals and integrated cable clamps
- Suitable for Class I & II luminaires
- Wide ta range -25 ~ +50°C
- NFC programmability
- Touch DIM compatibility
- 5 years guarantee
- High power handling on 4 channels
- Multi-dim protocols: DALI-2, 0/1-10V, Resistor, PWM 1 to 4 channel output with DALI-2 certification
- DALI-2 certified incl. Parts 251, 252, 253
- DT6 and DT8 operations
- TW in 0-10V compatible

EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186134127	IT D0P 480/12-48V/4C NFC L C RGBW	480	0.1%	12 ~ 48	/	195 x 51 x 20

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

About IT D0P 12-48V

- Multi-dimming DC-DC device, in system with inventronics constant voltage LED drivers with ON/OFF funtions can deliver dimming operations up to 480 W from 4 output channels
- 21 different dimming options easily programmable with NFC
- Box programming available for fast batch programming
- Independent housing with endcaps allows maximum installation freedom
- Compatible with touch timing and double touch dimming in TW for dimmable solutions without DALI interfaces

Dimming Functions

DALI-2 / 0(1) ~ 10V / PWM

Safety Certifications





Advantages

- Very high Efficiency up to 97%
- Current adjustable via NFC*
- CLO integrated for maximizing energy savings
- Small, slim white metal housing
- Suitable for emergency lighting units
- Wide Output current range
- Low THD ~4.7% @ full load
- Input voltage: 220 ~ 240VAC
- Ambient temp range ta: -25 ~ +55°C
- Wide output voltage range
- CLO – Constant Lumen Output
- Fixed output (no dimming)
- 5 years guarantee

EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186115195	OT WI 50/220-240/24 4CH CA	50	75 ~ 400	54 ~ 240	92%	280 x 30 x 21
6937186115171	OT WI 80/220-240/24 4CH CA	80	125 ~ 550	54 ~ 240	93%	280 x 30 x 21
6937186115218	OT WI 160/220-240/24 2CH CA	160	100 ~ 750	54 ~ 260	94%	280 x 30 x 21

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Supply voltage: 220 ~ 240 V
- Line frequency: 50 Hz | 60 Hz
- Line voltage: 198 ~ 264 V
- According to EN 61347-1, 61347-2-13, 62384
- RI suppression according to CISPR 15
- Line harmonics according to IEC 61000-3-2
- Immunity according to IEC 61547
- Small housing for flexible luminaire designs
- Higher quality of light thanks to 3% output ripple current
- Operating temperature: up to 60 °C
- User flexibility with four different output currents from one driver
- Flexible current selection via DIP switch
- Reversible overtemperature, overload, short-circuit and open-circuit protection
- High efficiency (up to 90%)

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770437586	OT FIT 8/220-240/180 CS I MINI	2.7 ~ 7.6	90 ~ 180	30 ~ 42	86%	104 x 30 x 26
6977770437609	OT FIT 8/220-240/180 CS S MINI	2.7 ~ 7.6	90 ~ 180	30 ~ 42	86%	87 x 30 x 20
6977770437487	OT FIT 15/220-240/350 CS S MINI	6.7 ~ 14.7	225 ~ 350	30 ~ 42	88%	87 x 35 x 22
6977770437500	OT FIT 20/220-240/500 CS S MINI	12 ~ 21	400 ~ 500	30 ~ 42	89%	87 x 35 x 22
6977770437524	OT FIT 30/220-240/700 CS S MINI	16.5 ~ 29	550 ~ 700	30 ~ 42	89%	87 x 35 x 22
6977770437548	OT FIT 38/220-240/900 CS S MINI	24 ~ 37.8	800 ~ 900	30 ~ 42	90%	87 x 35 x 22

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- AC Supply Voltage 220 ~ 240 Vac
- Line frequency: 50 Hz | 60 Hz
- Line voltage: 198 ~ 264 V
- SELV LED driver in track adaptor
- Lifetime 50 000 h at tc max
- Dip-switches for easy output current selection
- Low THD 10% @ full load
- Low LF-ripple 5%
- Compact size for miniaturized track light luminaire design
- High light quality due to low ripple current
- Three colors available: White, Grey, Black

- High flexibility due to eight different output currents
- High efficiency (up to 90%)

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770437241	IT FIT 30/220-240/700 CS T-B	6.75 ~ 29.4	250 ~ 700	27 ~ 42	90%	167 x 33 x 46
6977770437265	IT FIT 30/220-240/700 CS T-G	6.75 ~ 29.4	250 ~ 700	27 ~ 42	90%	167 x 33 x 46
6977770437289	IT FIT 30/220-240/700 CS T-W	6.75 ~ 29.4	250 ~ 700	27 ~ 42	90%	167 x 33 x 46
6977770437364	IT FIT 40/220-240/1A0 CS T-B	18.9 ~ 44.1	700 ~ 1050	27 ~ 42	90%	167 x 33 x 46
6977770437388	IT FIT 40/220-240/1A0 CS T-G	18.9 ~ 44.1	700 ~ 1050	27 ~ 42	90%	167 x 33 x 46
6977770437401	IT FIT 40/220-240/1A0 CS T-W	18.9 ~ 44.1	700 ~ 1050	27 ~ 42	90%	167 x 33 x 46

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages


- SELV LED drivers up to 30W
- Dip switch for 4 output currents per model
- Dimensions: ~230mm length
- Available with Black, White and Grey housing
- High quality of light with low ripple
- High efficiency, up to 91.5%
- Compatible with a wide range of popular tracks
- Short dimension to design elegant luminaire

- Invisible when installed in track system
- Future proof & flexible offer with 4 currents for selection

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770438798	IT FIT 14/220-240/350 CS TI-B	6 ~ 14	200 ~ 350	30 ~ 40	91.5%	230 x 29.6 x 32.1
6977770438811	IT FIT 14/220-240/350 CS TI-W	6 ~ 14	201 ~ 350	30 ~ 40	91.5%	230 x 29.6 x 32.1
6977770438835	IT FIT 14/220-240/350 CS TI-G	6 ~ 14	202 ~ 350	30 ~ 40	91.5%	230 x 29.6 x 32.1
6977770438859	IT FIT 22/220-240/550 CS TI-B	12 ~ 22	400 ~ 550	30 ~ 40	91%	230 x 29.6 x 32.1
6977770438873	IT FIT 22/220-240/550 CS TI-W	12 ~ 22	401 ~ 550	30 ~ 40	91%	230 x 29.6 x 32.1
6977770438897	IT FIT 22/220-240/550 CS TI-G	12 ~ 22	402 ~ 550	30 ~ 40	91%	230 x 29.6 x 32.1
6977770438910	IT FIT 30/220-240/750 CS TI-B	18 ~ 30	600 ~ 750	30 ~ 40	90.5%	230 x 29.6 x 32.1
6977770438934	IT FIT 30/220-240/750 CS TI-W	18 ~ 30	601 ~ 750	30 ~ 40	90.5%	230 x 29.6 x 32.1
6977770438958	IT FIT 30/220-240/750 CS TI-G	18 ~ 30	602 ~ 750	30 ~ 40	90.5%	230 x 29.6 x 32.1

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Dip switch for 4 output currents per model
- High light quality thanks to low ripple
- PF>0.95, Low THD<10% @ full load
- Excellent price/quality/watt ratio
- Suitable for Class I luminaires

Dimming Functions

N/A

Safety Certifications



Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
EM FIT 18/220-240/0A35/N CS L	18	200/250/300/350	24 ~ 54	87%	168 x 30 x 21
EM FIT 40/220-240/0A35/N CS L	40	200/250/300/350	40 ~ 120	90%	168 x 30 x 21
EM FIT 60/220-240/0A35/N CS L	60	200/250/300/350	90 ~ 175	90%	168 x 30 x 21
EM FIT 75/220-240/0A55/N CS L	75	350/400/500/550	90 ~ 216	91%	210 x 30 x 21
EM FIT 18/220-240/0A35 CS L	18	200/250/300/350	27 ~ 51	87%	168 x 30 x 21
EM FIT 40/220-240/0A8 CS L	40	500/600/700/800	27 ~ 51	90%	168 x 30 x 21
EM FIT 60/220-240/1A2 CS L	60	900/1050/1100/1200	27 ~ 51	90%	210 x 30 x 21
EM FIT 75/220-240/1A6 CS L	75	1300/1400/1500/1600	27 ~ 51	91%	280 x 30 x 21

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.



Advantages

- Dip switch for 4 output currents per model
- High light quality thanks to low ripple
- PF>0.95, Low THD<10% @ full load
- Excellent price/quality/watt ratio
- CCT selection
- Suitable for Class I luminaires

Dimming Functions

N/A

Safety Certifications



Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
EM FIT 18/220-240/0A35/N CS L CCT	18	not relevant	24 ~ 54	87%	168 x 30 x 21
EM FIT 40/220-240/0A35/N CS L CCT	40	not relevant	40 ~ 120	90%	168 x 30 x 21
EM FIT 60/220-240/0A35/N CS L CCT	60	not relevant	90 ~ 175	90%	168 x 30 x 21
EM FIT 75/220-240/0A55/N CS L CCT	75	not relevant	90 ~ 216	91%	210 x 30 x 21

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.



Advantages

- Supply voltage: 220 ~ 240 V
- Fixed output (no dimming)
- Line frequency: 50 Hz | 60 Hz
- Line voltage: 198 ~ 264 V
- According to EN 61347-1, 61347-2-13, 62384
- Line harmonics according to EN 61000-3-2
- Immunity according to EN 61547 SELV
- Versatile scope of application due to output power range of up to 42 W
- Higher quality of light thanks to 5% output ripple current
- High efficiency
- High compatibility with COBs and discrete LEDS

Dimming Functions

N/A

Safety Certifications



More Technical Data



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770430396	ELEMENT 6/220-240/150	3.6 ~ 6.3	150	24 ~ 42	80%	90 x 43 x 22
6977770430419	ELEMENT 8/220-240/200	4.8 ~ 8.4	200	24 ~ 42	82%	90 x 43 x 22
6977770430433	ELEMENT 10/220-240/250	6 ~ 10.5	250	24 ~ 42	84%	90 x 43 x 22
6977770430211	ELEMENT 12/220-240/300	7.2 ~ 12.6	300	24 ~ 42	85%	90 x 43 x 22
6977770430235	ELEMENT 15/220-240/350	8.4 ~ 14.7	350	24 ~ 42	85%	90 x 43 x 22
6977770430259	ELEMENT 20/220-240/500	10.5 ~ 20	500	21 ~ 40	87%	103 x 43 x 29
6977770430273	ELEMENT 25/220-240/600	12.6 ~ 24	600	21 ~ 40	87%	103 x 43 x 29
6977770430297	ELEMENT 30/220-240/700	14.7 ~ 28	700	21 ~ 40	88%	103 x 43 x 29
6977770430310	ELEMENT 33/220-240/800	16.8 ~ 32	800	21 ~ 40	88%	103 x 43 x 29
6977770430334	ELEMENT 35/220-240/900	18.9 ~ 36	900	21 ~ 40	89%	103 x 43 x 29
6977770430358	ELEMENT 38/220-240/950	20 ~ 38	950	21 ~ 40	89%	103 x 43 x 29
6977770430372	ELEMENT 42/220-240/1050	22 ~ 42	1050	21 ~ 40	89%	103 x 43 x 29

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.



Advantages

- DC mode functionality
 - Type of protection: IP66 and IP67
 - Surge protection: up to 4 kV (L-N) / 6 kV (L/N-PE)
 - Wide operating temperature range: -30 ~ +55 °C
 - Lifetime: up to 50,000 h (temperature at max. tc)
 - Large range of products from 20 W to 250 W
 - Installation in very cold and hot environments
 - Very stable output power
 - High electrical reversible short-circuit, overload, overtemperature protection
- Smart Power Supply: boosting power to turn on cold LEDs
 - Independent installation possible

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186114914	OT 20/220-240/24 P	20	not relevant	24.2	83%	178 x 43 x 25
6937186114938	OT 40/220-240/24 P	40	not relevant	24.2	85%	208 x 43 x 26
6937186114952	OT 60/220-240/24 P	60	not relevant	24.2	87%	208 x 43 x 26
6937186114976	OT 100/220-240/24 P	100	not relevant	24.2	90%	240 x 50 x 34
6937186114990	OT 130/220-240/24 P	130	not relevant	24.2	90.5%	220 x 63 x 37
6937186115010	OT 250/220-240/24 P	250	not relevant	24.2	92%	265 x 68 x 40

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Small housing design for mounting in coves or linear luminaires
- Versatile scope of application thanks to an output power range of up to 300 W
- Robust and durable design for outdoor applications

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
4062172085465	OT FIT 80/220-240/24 P	40 ~ 80	not relevant	24	88.5%	170 x 53 x 31.5
4062172085601	OT FIT 150/220-240/24 P	75 ~ 150	not relevant	24	92%	240 x 53 x 31.5
4062172085649	OT FIT 200/220-240/24 P	100 ~ 200	not relevant	24	93%	215 x 53 x 31.5
4062172085687	OT FIT 300/220-240/24 P	150 ~ 300	not relevant	24	93%	260 x 68 x 39.6

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Versatile scope of application due to output power range of up to 300 W
- Very high efficiency
- IP rating: up to IP66/IP67
- High surge protection: up to 6 kV (L-N) / 6 kV (L/N-PE)

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770438675	OT FIT 30/220-240/12 P	30	not relevant	12	82%	190 x 40 x 20.5
6977770438613	OT FIT 60/220-240/12 P	60	not relevant	12.5	87%	157 x 53 x 31.5
6977770438637	OT FIT 150/220-240/12 P	150	not relevant	12.5	91%	202 x 53 x 31.5
6977770438651	OT FIT 300/220-240/12 P	300	not relevant	12.5	91%	266 x 83 x 39.5

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Wide Ta range -20 ~ +50
- 24 V constant output voltage
- Output power up to 250 W
- High efficiency up to 93% (depend on different wattage)
- PF 0.98
- Screw terminal
- Suitable for Class I/II luminaires
- Build-in and independent installation
- 5 years guarantee*
- Cable clamp integrated
- SELV
- Overload protection
- Overtemperature protection
- Mains voltage: 220 ~ 240 VAC
- Class II design for wide application
- Well design for Flex and Signage
- Excellent price/quality/watt ratio
- Lifetime: up to 50,000 h (temperature at max. tc)

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186142672	IT FIT 30/220-240/24	30	not relevant	24	87%	170 x 40 x 30
6937186142696	IT FIT 60/220-240/24	60	not relevant	24	89%	224 x 40 x 30
6937186142610	IT FIT 120/220-240/24	120	not relevant	24	90%	284 x 40 x 30
6937186142634	IT FIT 180/220-240/24	180	not relevant	24	92%	324 x 40 x 30
6937186142658	IT FIT 250/220-240/24	250	not relevant	24	93%	375 x 50 x 35

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Constant Voltage drivers suitable for 24V LED
- Type of protection: IP20
- Wide operating temperature range: -20 ~ +50 °C
- Lifetime: up to 50,000 h (temperature at max. tc)
- Installation in cold and hot environments
- Very stable output power
- High electrical reversible short-circuit, overload, overtemperature protection
- Independent installation possible

About OT SLIM 24V

Constant Voltage drivers suitable for 24V LED modules with very low housing profile suitable for independent installations

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770438699	OT SLIM 30/220-240/24	30	not relevant	24.2	86%	315 x 282 x 145
6977770438712	OT SLIM 60/220-240/24	60	not relevant	24.2	90%	350 x 192 x 145
6977770438736	OT SLIM 100/220-240/24	100	not relevant	24.2	91%	387 x 192 x 150
6977770438750	OT SLIM 160/220-240/24	160	not relevant	24.2	92%	417 x 192 x 165
6977770438774	OT SLIM 250/220-240/24	250	not relevant	24.2	91%	357 x 312 x 100

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Module efficacy: up to 173 lm/W
- Available with luminous flux: 245 lm on 62 mm, 275 lm on 70 mm
- Available with luminous flux: 1,100 lm or 2,000 lm on 280 mm
- Available with luminous flux: 2,200 lm or 4,000 lm on 560 mm
- Color rendering index: 90
- High initial color consistency: ≤ 3 SDCM
- Average lifetime (L80 B50): 70,000 h (temperature at Tc = 50 °C)
- CE marked, ENEC certified; UL listed
- Slim luminaire design by small and flexible form factor
- High homogeneity thanks to small LED pitch
- High voltage (HV) optimized for non-isolated, low voltage (LV) optimized for SELV operation
- Adjustable luminous flux, efficacy and lifetime
- Direct the light where it's needed while using PrevaLED
- Linear Optics

Safety Certifications



More Technical Data





PrevaLED Core G8

Advantages

- Complete portfolio with varying luminous flux, color temperature, color rendering
- Available with color temperature: 2,700 K, 3,000 K, 3,500 K or 4,000 K
- High module efficacy: up to 160 lm/W at $T_p = 85^\circ\text{C}$
- LED module is basic isolated to mounting surface
- Max. working voltage: 60 V (to be operated only on SELV LED control gear)
- High quality of light, complying with IES TM30-15 standard
- Flexible lumen output selection from 1,000 to 5,000lm
- Color consistency < 3SDCM
- Industry standard form factor and LES
- System approach (COB + Holder + Driver)
- Easy cooling due to optimized efficiency and high maximum operation temperature
- High driver flexibility allows cost-effective and intelligent systems
- Up to 50,000 hours lifetime
- 5 year guarantee

Safety Certifications



More Technical Data



PrevaLED COIN 50 COB G2

Advantages

- Color consistency 2 SDCM
- TM30 compliant
- High flux output up to 1500 lm
- Beam angle: 15°, 24°, 40°
- Type of protection: IP20
- Compatible with conventional MR16 lamps
- Precise optical control and free from multi-shadow issue
- Replaceable front cover to maximize optics flexibility and future extension
- Dual mode options in High-Output (HO) and High-Efficacy (HE)

Safety Certifications



More Technical Data





Advantages

- Nominal voltage: 24 V | 48 V
- Nominal wattage per meter: 4.0 W ~ 25.8 W
- Type of protection: IP00
- Color rendering index Ra: 80 | 90
- Color temperature: 2400 K ~ 4000 K
- Luminous flux per meter: 325 lm ~ 4100 lm
- Length: 3000 mm ~ 18000 mm
- Length – smallest unit: 50 mm | 100 mm
- Beam angle: 120 °
- LEDs per meter: 80
- Color uniformity better than 2 SDCM on the entire LED strip and between strips
- Light stability over time typically 1 SDCM, tested acc. to IEC 62717 @ 6,000 h
- LED lifetime acc.to IES LM-80 and IES TM-21 standards, and also internal Lab tests
- Reliable photometric parameters according to IES LM-79, EN13032-4 and CIE S 025
- Accurate description of the color rendition of the light source acc. to IES TM-30-15
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Vibration-resistant for stationary installations acc. to IEC60068-2-6 and IEC60068-2-64
- Flicker and stroboscopic effect-free acc. to IEC TR 61547-1 and IEC TR 63158
- Tested by accredited Product Qualification Lab. ISO9001, ISO 17025, ACCREDIA, VDE
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back

Safety Certifications



More Technical Data

24V Models:



48V Models:



Advantages

- Nominal voltage: 24 V | 48 V
- Nominal wattage per meter: 4.0 W ~ 26.4 W
- Type of protection: IP66/IP68
- Color rendering index Ra: 80 | 90
- Color temperature: 2400 K ~ 4000 K
- Luminous flux per meter: 430 lm ~ 4000 lm
- Length: 3000 mm ~ 18000 mm
- Length – smallest unit: 50 mm | 100 mm
- Beam angle: 120 °
- LEDs per meter: 80
- Color uniformity better than 2 SDCM on the entire LED strip and between strips
- Light stability over time typically 1 SDCM, tested acc. to IEC 62717 @ 6,000 h
- LED lifetime acc.to IES LM-80 and IES TM-21 standards
- Reliable photometric parameters according to IES LM-79, EN13032-4 and CIE S 025
- Accurate description of the color rendition of the light source acc. to IES TM-30-15
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Vibration-resistant for stationary installations acc. to IEC60068-2-6 and IEC60068-2-64
- Flicker and stroboscopic effect-free acc. to IEC TR 61547-1 and IEC TR 63158
- Tested by accredited Product Qualification Lab. ISO9001, ISO 17025, ACCREDIA, VDE
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- High-performance silicone for extremely long life

Safety Certifications



More Technical Data

24V Models:



48V Models:





Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 6.1 W ~ 20 W
- Type of protection: IP00 | IP68
- Color rendering index Ra: 80 ~ 95
- Color temperature: 2500 K ~ 4000 K
- Luminous flux per meter: 800 lm ~ 2100 lm
- Length: 5000 mm | 10000 mm
- Length – smallest unit: 50 mm
- Beam angle: 120°
- LEDs per meter: 140
- Color uniformity better than 2 SDCM on the entire LED strip and between strips
- Light stability over time typically 1 SDCM, tested acc. to IEC 62717 @ 6,000 h
- LED lifetime acc.to IES LM-80 and IES TM-21 standards
Reliable photometric parameters according to IES LM-79,
- EN13032-4 and CIE S 025
- Accurate description of the color rendition of the light source acc. to IES TM-30-15
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Vibration-resistant for stationary installations acc. to IEC60068-2-6 and IEC60068-2-64
- Flicker and stroboscopic effect-free acc. to IEC TR 61547-1 and IEC TR 63158
- Tested by accredited Product Qualification Lab. ISO9001, ISO 17025, ACCREDIA, VDE
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- High-performance silicone for extremely long life

Safety Certifications



More Technical Data



Advantages

- Energy saving low-power flexible LED strip
- Easy installation with track system
- Multi-cutable LED strip with CONNECT system
- Available in warm white and neutral white
- 120° viewing angle per module
- Consistent white light: 3 SDCM
- Color rendering index 90+ (CRI) and R9 > 50
- Lifetime: up to 50,000 h L70B50
- Dimmable (with suitable DALI dimming methods)
- Available with protection class IP00 and IP66
- IP66 protection, IP54 when cut and reconnected

Safety Certifications



More Technical Data






Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 7.9 W ~ 19.6 W
- Type of protection: IP00 | IP68
- Color rendering index Ra (white): up to 90
- Color temperature (white): 2200 K ~ 6500 K
- Luminous flux per meter: up to 1275 lm
- Length: 5100 mm | 6000 mm
- Length – smallest unit: 100 mm | 150 mm
- Beam angle: 120°
- LEDs per meter: up to 120
- Uniform color changing
- Great design freedom thanks to flexibility and cuttability of module
- High-performance silicone for extremely long life and flexibility
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- Extraordinary design and high quality materials
- Toolless connection with the optional CONNECTsystem

Safety Certifications



More Technical Data



Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 9.8 W ~ 34.7 W
- Type of protection: IP00
- Color rendering index Ra: 90
- Color temperature: 2700 K ~ 4180 K
- Luminous flux per meter: 1111 lm ~ 3400 lm
- Length: 3000 mm | 9000 mm
- Length – smallest unit: 75 mm
- Beam angle: 120°
- LEDs per meter: 187
- Color uniformity better than 3 SDCM on the entire LED strip and between strips
- LED lifetime acc.to IES LM-80 and IES TM-21 standards
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- Extraordinary design and high quality materials
- Pre-soldered wires

Safety Certifications



More Technical Data





Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 9.9 W ~ 32 W
- Type of protection: IP67
- Color rendering index Ra: 80 | 90
- Color temperature: 3100 K | 3700 K
- Luminous flux per meter: 1134 lm ~ 3356 lm
- Length: 3000 mm | 9000 mm
- Length – smallest unit: 75 mm
- Beam angle: 120 °
- LEDs per meter: 187
- Color uniformity better than 3 SDCM on the entire LED strip and between strips
- LED lifetime acc.to IES LM-80 and IES TM-21 standards, and also internal Lab tests
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- Extraordinary design and high quality materials
- High-performance silicone for extremely long life

Safety Certifications



More Technical Data



Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 7.3 W ~ 21 W
- Type of protection: IP66/IP68
- Color rendering index Ra: 80 | 90
- Color temperature: 2440 K ~ 7100 K
- Luminous flux per meter: 460 lm ~ 1550 lm
- Length: 4000 mm ~ 10000 mm
- Length – smallest unit: 50 mm
- Beam angle: 120 °
- LEDs per meter: 140
- IP66/IP68 protection with high performance silicone
- Reliable connection over long periods of time: IP66/67 connector with built-in protection against liquids penetrating through the wires into the LED strip
- Outdoor use possible: UV and salt mist resistant (UV acc. to ISO 4892-2 - Method A, salt mist acc. to IEC 60068-2-52 severity 1)

Safety Certifications



More Technical Data





Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 7 W ~ 21 W
- Type of protection IP66/IP67 | IP66/IP68 | IP67
- Color rendering index Ra: 80 | 90
- Color temperature: 2300 K ~ 6900 K
- Luminous flux per meter: 340 lm ~ 1050 lm
- Length: 4000 mm ~ 10000 mm
- Length – smallest unit: 50 mm
- Beam angle: 120 °
- LEDs per meter: 140
- IP68 protection with high performance silicone
- Reliable connection over long periods of time: IP67 connector with built-in protection against liquids penetrating through the wires into the LED strip
- Outdoor use possible: UV and salt mist resistant (UV acc. to ISO 4892-2 - Method A, salt mist acc. to IEC 60068-2-52 severity 1)

Safety Certifications



More Technical Data



Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter: 18.0 W
- Type of protection: IP67
- Color rendering index Ra: RGB
- Color temperature: 4000 K
- Luminous flux per meter: 170 lm
- Length: 5000 mm
- Length – smallest unit: 100 mm
- Beam angle: 120 °
- LEDs per meter: 70
- Pastel colours thanks white LED with good color rendering (4000K)
- Long lifetime: 50.000 hours

Safety Certifications



More Technical Data





Advantages

- Nominal voltage: 24 V
- Nominal wattage per meter. 18.0 W
- Type of protection: IP67
- Color rendering index Ra: RGB
- Color temperature. 4000 K
- Luminous flux per meter: 170 lm
- Length: 5000 mm
- Length – smallest unit: 100 mm
- Beam angle: 120 °
- LEDs per meter: 70
- Pastel colours thanks white LED with good color rendering (4000K)
- Long lifetime: 50.000 hours

Safety Certifications



More Technical Data





Signage

Light is noticeable!

Choosing our signage lighting systems, allows your brand to stand out with exceptional visibility and reliability. Experience the highest homogeneity of illumination with our backlighting systems, designed to deliver the brightest, most efficient, and highest reliable illumination, in full light-control.

Expertise

Attractive advertising or impressive surface illumination, require backlighting systems and eye-catching channel letters in advertisements or homogeneous and color uniform backlit ceilings & walls for unique design interiors.



light uniformity
& efficiency



Complete component
system




durability &
long-lasting reliability

System
Value

- Our LED modules are designed to deliver best-in-class homogeneous light for any backlit surface, shape and depth.
- Enhanced backlighting flexibility with modular systems available in a wide range of power and luminous flux options, in monochromatic white, tuneable white, and RGBW.
- Ease of installation, with complete set of application-specific accessories, making installation fast and intuitive.
- Our patented solutions, from lenses to smart drivers, ensure the highest system efficiency during operation, while providing full light control.
- Extended system warranty, built on fully tested, interoperable components, including LED modules, smart drivers, sensors, and controls.
- Our global technical service supports lighting projects with comprehensive assistance, including component customization.

Lighting System
Solutions

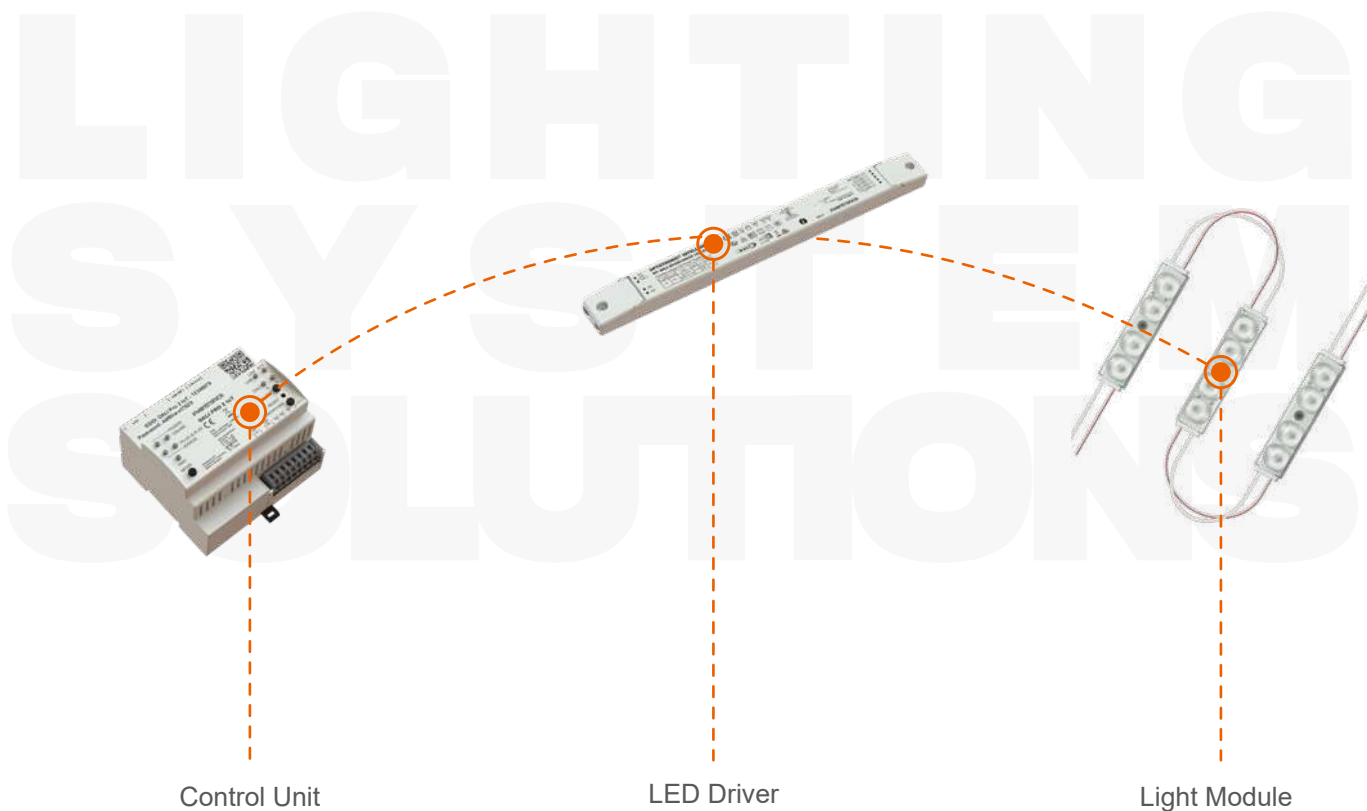

Sub-applications



Emerging Non-Lighting



Digital Signage



01

Controls, Sensors,
Programming Tools & Accessories

1.1 DALI	DALI PRO 2 IoT	289
	DALI MCU TW G2	290
	DALI-2 REP LI	291
1.2 Software	Tuner4TRONIC	292
	DALI PRO PC TOOL	292
	DALI Wizard	292
	BT Config	292
	DALI PRO CONTROL	292
	BT CONTROL	292
1.3 Programming Tools	DALI magic	293

02

LED Driver & Accessories

2.1 Connected - Constant Current	OTi DALI 24V 4CH P	294
	OTi DALI 24V	295
2.2 Simple DIM - Constant Current	OT DIM 24V P (1...10V)	296
	OT DMX DIM 5CH	297
	OT PC 24V	298
	IT D0P 48012-48V4C NFC L C RGBW	299
2.3 Non Dimmable - Constant Current	OT 24V P	300
	OT FIT 24V P	301
	OT FIT 12V P	302
	IT FIT 24V	303
	OT SLIM 24V	304

03 Light Modules & Accessories

3.1 Rigid	BASIC FLEX Shortpitch	305
	BackLED M CP G5 24V	306
	BackLED CX G5	307
	BackLED Area Tunable White	308





Advantages

- DALI-2 certified
- IoT ready with built-in gateway for remote data access
- Easy browser-based commissioning UI and Professional Software available
- Small form factor: only 6 TE (DIN rail)
- Commissioning via Ethernet/WLAN
- DALI-2 certified for improved multi-vendor interoperability
- Template based onsite commissioning via Smart device
- Building Management System integration via optional KNX interface
- Remote access for changes in the configuration from every location
- LAN Interconnect to connect up-to 8 Controllers into one network
- Rest API for connection of a 3rd party Cloud with the DALI Pro 2 IoT Controller
- Automated testing and reporting of emergency lighting installations
- Daylight Simulation via scene recall and/or light sensor regulation

Safety Certifications



EAN	Product Name
6977078993692	DALI PRO 2 IOT

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Up to 4 DALI PCU TW G2 can be connected in parallel to set up multiple control points
- Automatic synchronization between the control points
- Cover and rotary switch in neutral white
- Length of the DALI control cable: up to 300 m
- Intuitive manual dimming, switching and changing of colour temperature
- Individual setting of minimal brightness level
- Individual setting of colour temperature range

Safety Certifications



EAN	Product Name
6977078993777	DALI MCU TW G2

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Expansion of DALI systems by 64 DALI control gears each time
- Extends the DALI line by 300 m
- Maximum power consumption in stand-by mode: 1 W
- Four versatile operating modes: Basic, Group, Extend, Touch DIM
- Basic mode: DALI-2 certified DALI converter for grouping up to 64 standard DALI drivers.
- Group mode: Groups up to 64 DALI drivers and up to 5 Inventronics DALI-2 sensors.
- Group mode: Supports standard DALI drivers and DALI-DT8 drivers (TW / RGB (W)).
- Touch DIM mode: Simple switching and dimming of up to 64 drivers.
- Powerful power supply:130 mA DALI bus power supply
- Can be addressed via DALI

Safety Certifications



EAN	Product Name
6937186116437	DALI-2 REP LI

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



SOFTWARE

Software

Overview
Inventronics offers a comprehensive range of professional software solutions to support and configure its components.



Tuner4TRONIC
A software suite for OEMs that enables the configuration of all programmable OPTOTRONIC, ICUTRONIC, QUICKTRONIC, and POWERTRONIC LED drivers during the luminaire manufacturing process.



DALI PRO PC TOOL
Software for configuring DALI installations in combination with the DALI PROFESSIONAL control unit DALI PRO C-4 RTC or DALI PRO 2 IoT. DALI PRO 2 IoT is an innovative lighting management control technology for the IoT era.



DALI Wizard
A GUI tool for setting up, analyzing, and diagnosing DALI ECG installations, used in combination with the DALI Wizard control device.



BT Config
An app that offers standalone component detection and automatic light calibration, eliminating the need for manual commissioning and adjustments of daylight-dependent controls.



DALI PRO CONTROL
Easily manage complex lighting scenarios at a touch: switch or dim lights, change light colors or adjust the color temperature.



BT Control
Allows the control of DALI-enabled luminaires via a smartphone, including light level and color temperature adjustments, as well as the storage of individual lighting scenes.

PROGRAMMING TOOLS

Programming Tools

DALI magic



Features

- USB DALI converter for Tuner4TRONIC and DALI wizard software for Windows PC
- Pushbutton to test DALI dimming without need of connection to computer
- Powered by USB or by included universal power supply
- Integrated automatic DALI supply of up to 64 devices (up to 4 if powered by USB)



Advantages

- LED driver whose output power can be shared arbitrarily among the 2 or 4 channels
- Dimming range: 0/0, 1 ~ 100 %
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- High level surge protection: up to 6 kV (L-N), 8 kV (L/N-PE)
- Inrush current limiter circuit
- Long lasting and high reliability
- From 1 to 4 channels to arbitrarily distribute the power
- Suitable for installation under sunlight
- IP66/IP67 Salt mist resistant and DC functionality
- AstroDim functionality for automatic dimming and turn on/off

Dimming Functions

DALI-2

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
4062172364263	OTi DALI 210/220-240/244CHDT6/8 P	0 ~ 210	not relevant	24.7	93%	330 x 80 x 47
4062172364324	OTi DALI 100/220-240/244CHDT6/8 P	0 ~ 100	not relevant	24.7	93%	237 x 80 x 40

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Dimmable via Touch DIM
- Available as single-channel or multi-channel with DT6 and DT8 in one device
- Dimming range: 0.1 ~ 100 % (for 50-80-160W) or 1 ~ 100 % (for 30W)
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Intelligent power matching thanks to Smart power supply
- Form factor for mounting on the cove or in luminaires
- No stroboscopic effect thanks to patented high PWM frequency management (2 kHz)
- Suitable for installation in emergency lighting systems according to EN 60598-2-22
- IP rating: IP20

EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186115119	OTi DALI 30/220-240/24 1CH	30	not relevant	24	88%	103 x 67 x 29.5
6977770431881	OTi DALI 50/220-240/24 1CH G3	50	not relevant	24	92%	346 x 32 x 22
6977770431966	OTi DALI 50/220-240/24 4CH DT6/8 G3	50	not relevant	24	92%	347 x 32 x 22
6977770431867	OTi DALI 80/220-240/24 1CH G3	80	not relevant	24	93%	348 x 32 x 22
6977770431942	OTi DALI 80/220-240/24 4CH DT6/8 G3	80	not relevant	24	93%	349 x 32 x 22
6977770431904	OTi DALI 160/220-240/24 1CH G3	160	not relevant	24	93%	300 x 50 x 35
6977770431928	OTi DALI 160/220-240/ 24 2CH DT6/8 G3	160	not relevant	24	93%	301 x 50 x 35

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- DC mode functionality
- Type of protection: IP66 and IP67
- Surge protection: up to 4 kV (L-N) / 6 kV (L/N-PE)
- Wide operating temperature range: -30 ~ +55 °C
- Lifetime: up to 50,000 h (temperature at max. tc)
- Dimmable via fully isolated 1 ~ 10 V interface
- Large range of products from 20 W to 250 W
- Installation in very cold and hot environments
- Very stable output power
- High electronical reversible short-circuit, overload, overtemperature protection

- Smart Power Supply: boosting power to turn on cold LEDs
- Independent installation possible
- Dimming range: 1 ~ 100 %

Dimming Functions

1 ~ 10V

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770438347	OT 20/220-240/24 DIM P	20	not relevant	24.2	83%	178 x 43 x 25
6977770438361	OT 40/220-240/24 DIM P	40	not relevant	24.2	85%	208 x 43 x 26
6977770438385	OT 60/220-240/24 DIM P	60	not relevant	24.2	87%	208 x 43 x 26
6977770438408	OT 100/220-240/24 DIM P	100	not relevant	24.2	90%	240 x 50 x 34
6977770438422	OT 130/220-240/24 DIM P	130	not relevant	24.2	90.5%	220 x 63 x 37
6977770438446	OT 250/220-240/24 DIM P	250	not relevant	24.2	92%	265 x 68 x 40

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Intelligent DMX dimmer, with output voltage of 12, 24 and 48 V
- Control of LED modules up to 12 A
- RDM functionality for total control in application
- Control of white, Tunable White, RGB, RGBW and RGBTW LED modules
- Independent housing for ceiling installation
- Minimal installation effort
- Selectable PWM frequency

EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977078993838	OT DMX DIM 5CH	576	not relevant	12 ~ 48	95%	172 x 42 x 20

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Dimming Functions

DMX

Safety Certifications



Advantages

- IP rating: IP20
- High efficiency
- Very stable output power
- High electrical reversible short-circuit, overload, overtemperature protection
- Independent installation possible
- Suitable for luminaires of protection classes I and II
- 24 V constant output voltage SELV
- Wide Ta range -20 ~ +50
- Lifetime: up to 50,000 h(temperature at max.tc)
- Dimming range: 3 ~ 100 % luminous flux
- Recommended to Use Trailing Edge dimmer

EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770438460	OT FIT 36/220-240/24 PC	24.2 ~ 36	not relevant	24.2	85%	103 x 67 x 29.5
6977770438484	OT FIT 75/220-240/24 PC	24.2 ~ 75	not relevant	24.2	92%	110 x 75 x 30
6977770438569	OT FIT 150/220-240/24 PC	60.5 ~ 150	not relevant	24.2	92%	170 x 76 x 30

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



About OT PC 24V

Optotronic Constant Volgate drivers with phase-cut dimming control port. Inndependent housing for installation freedom on any surfaces.

Dimming Functions

Phase-Cut

Safety Certifications





Advantages

- 12-48 V SELV output constant voltage range
- Output power up to 480 W
- 10A handling allowed on one channel
- Overload/Over temperature/Short circuit protection, automatic, reversible 50.000h at tc max*
- *10% cumulated failure
- Screw terminals and integrated cable clamps
- Suitable for Class I & II luminaires
- Wide ta range -25 ~ +50°C
- NFC programmability
- Touch DIM compatibility
- 5 years guarantee
- High power handling on 4 channels
- Multi-dim protocols: DALI-2, 0/1-10V, Resistor, PWM
- 1 to 4 channel output with DALI-2 certification
- DALI-2 certified incl. Parts 251, 252, 253
- DT6 and DT8 operations
- TW in 0-10V compatible

EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186134127	IT D0P 480/12-48V/4C NFC L C RGBW	480	0.1%	12 ~ 48	/	195 x 51 x 20

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

About IT D0P 12-48V

- Multi-dimming DC-DC device, in system with inventronics constant voltage LED drivers with ON/OFF funtions can deliver dimming operations up to 480 W from 4 output channels
- 21 different dimming options easily programmable with NFC
- Box programming available for fast batch programming
- Independent housing with endcaps allows maximum installation freedom
- Compatible with touch timming and double touch dimming in TW for dimmable solutions without DALI interfaces

Dimming Functions

DALI-2 / 0(1)-10V / PWM

Safety Certifications



Advantages

- DC mode functionality
- Type of protection: IP66 and IP67
- Surge protection: up to 4 kV (L-N) / 6 kV (L/N-PE)
- Wide operating temperature range: -30 ~ +55 °C
- Lifetime: up to 50,000 h (temperature at max. tc)
- Large range of products from 20 W to 250 W
- Installation in very cold and hot environments
- Very stable output power
- High electronical reversible short-circuit, overload, overtemperature protection

- Smart Power Supply: boosting power to turn on cold LEDs
- Independent installation possible

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186114914	OT 20/220-240/24 P	20	not relevant	24.2	83%	178 x 43 x 25
6937186114938	OT 40/220-240/24 P	40	not relevant	24.2	85%	208 x 43 x 26
6937186114952	OT 60/220-240/24 P	60	not relevant	24.2	87%	208 x 43 x 26
6937186114976	OT 100/220-240/24 P	100	not relevant	24.2	90%	240 x 50 x 34
6937186114990	OT 130/220-240/24 P	130	not relevant	24.2	90.5%	220 x 63 x 37
6937186115010	OT 250/220-240/24 P	250	not relevant	24.2	92%	265 x 68 x 40

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Small housing design for mounting in coves or linear luminaires
- Versatile scope of application thanks to an output power range of up to 300 W
- Robust and durable design for outdoor applications

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
4062172085465	OT FIT 80/220-240/24 P	40 ~ 80	not relevant	24	88.5%	170 x 53 x 31.5
4062172085601	OT FIT 150/220-240/24 P	75 ~ 150	not relevant	24	92%	240 x 53 x 31.5
4062172085649	OT FIT 200/220-240/24 P	100 ~ 200	not relevant	24	93%	215 x 53 x 31.5
4062172085687	OT FIT 300/220-240/24 P	150 ~ 300	not relevant	24	93%	260 x 68 x 39.6

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Versatile scope of application due to output power range of up to 300 W
- Very high efficiency
- IP rating: up to IP66/IP67
- High surge protection: up to 6 kV (L-N) / 6 kV (L/N-PE)

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770438675	OT FIT 30/220-240/12 P	30	not relevant	12	82%	190 x 40 x 20.5
6977770438613	OT FIT 60/220-240/12 P	60	not relevant	12.5	87%	157 x 53 x 31.5
6977770438637	OT FIT 150/220-240/12 P	150	not relevant	12.5	91%	202 x 53 x 31.5
6977770438651	OT FIT 300/220-240/12 P	300	not relevant	12.5	91%	266 x 83 x 39.5

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





Advantages

- Wide Ta range -20 ~ +50
 - 24 V constant output voltage
 - Output power up to 250 W
 - High efficiency up to 93% (depend on different wattage)
 - PF 0.98
 - Screw terminal
 - Suitable for Class I/II luminaires
 - Build-in and independent installation
 - 5 years guarantee*
 - Cable clamp integrated
 - SELV
 - Overload protection
- Overtemperature protection
 - Mains voltage: 220 ~ 240 VAC
 - Class II design for wide application
 - Well design for Flex and Signage
 - Excellent price/quality/watt ratio
 - Lifetime: up to 50,000 h (temperature at max. tc)

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6937186142672	IT FIT 30/220-240/24	30	not relevant	24	87%	170 x 40 x 30
6937186142696	IT FIT 60/220-240/24	60	not relevant	24	89%	224 x 40 x 30
6937186142610	IT FIT 120/220-240/24	120	not relevant	24	90%	284 x 40 x 30
6937186142634	IT FIT 180/220-240/24	180	not relevant	24	92%	324 x 40 x 30
6937186142658	IT FIT 250/220-240/24	250	not relevant	24	93%	375 x 50 x 35

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data



Advantages

- Constant Voltage drivers suitable for 24V LED
- Type of protection: IP20
- Wide operating temperature range: -20 ~ +50 °C
- Lifetime: up to 50,000 h (temperature at max. tc)
- Installation in cold and hot environments
- Very stable output power
- High electrical reversible short-circuit, overload, overtemperature protection
- Independent installation possible

About OT SLIM 24V

Constant Voltage drivers suitable for 24V LED modules with very low housing profile suitable for independent installations

Dimming Functions

N/A

Safety Certifications



EAN	Product Name	Nominal output power (W)	Nominal Output Current (mA)	Output Voltage (Vdc)	Efficiency (max.)	Dimensions (L×W×H)(mm)
6977770438699	OT SLIM 30/220-240/24	30	not relevant	24.2	86%	315 x 282 x 145
6977770438712	OT SLIM 60/220-240/24	60	not relevant	24.2	90%	350 x 192 x 145
6977770438736	OT SLIM 100/220-240/24	100	not relevant	24.2	91%	387 x 192 x 150
6977770438750	OT SLIM 160/220-240/24	160	not relevant	24.2	92%	417 x 192 x 165
6977770438774	OT SLIM 250/220-240/24	250	not relevant	24.2	91%	357 x 312 x 100

Please note: Until the end of March 2026, deliveries may still include products under the OSRAM brand. Same products, same quality, different logo.

More Technical Data





BASIC FLEX Shortpitch

Advantages

- Energy saving low-power flexible LED strip
- Easy installation with track system
- Multi-cuttable LED strip with CONNECT system
- Available in warm white and neutral white
- 120° viewing angle per module
- Consistent white light: 3 SDCM
- Color rendering index 90+ (CRI) and R9 > 50
- Lifetime: up to 50,000 h L70B50
- Dimmable (with suitable DALI dimming methods)
- Available with protection class IP00 and IP66
- IP66 protection, IP54 when cut and reconnected

Safety Certifications



More Technical Data



BackLED M CP G5 24V

Advantages

- LED chain comprising up to 40 LED modules connected by flexible cables
- Each LED module contains 2 or 4 LEDs (XL model)
- LED module pitch variable between 60 and ~ 200 mm
- Compatible with OPTOTRONIC constant voltage drivers / dimmers
- Color consistency in 3 SDCM
- Patented Square Lens technology
- Wide CCT and color options available
- IP66 rating
- Lifetime (L80/B10): 50,000 h (temperature at Tc = 70 °C)
- 5-year warranty @ Ta = 70 °C
- High module efficacy: up to 135 lm/W
- Uniform light pattern design for 60-200 mm lightbox depth
- Backside injection technology for high protection level
- Energy saving with high efficacy
- Flammability rating at V0

Safety Certifications



More Technical Data





BackLED CX G5

Advantages

- Color consistency in 3 SDCM
- Diffusive Optics technology
- Wide CCT options available
- IP66 Rated
- High module flux output up to 80 lm (M-model) and 162lm (L-model)
- 5 year warranty
- Wide beam angle for high uniformity
- Good solution to reduce system cost

Safety Certifications



More Technical Data



BackLED Area Tunable White

Advantages

- 24 V constant voltage LED modules
- Tunable white 2700K-6500K for dynamic white applications
- Color rendering index Ra: 90
- Constant LED pitch even at board interconnections
- Cuttable, single board for an exact fit in any installation
- Product only compatible with DALI DT8 drivers (TW) or BLE devices with TW lamp profiles
- Provides homogenous light suitable for application in area luminaires
- Quick and easy mounting thanks to plastic holder
- Easy wiring with push-in connectors
- Low energy consumption and less heat generation
- Optimal operation on OPTOTRONIC® 24VDC and 24VDC dimmable power supplies

Safety Certifications



More Technical Data

