

The trusted value of OSRAM Digital Systems continues with Inventronics Global – where experience meets innovation.

B NLC D4i PD P Z

Light management systems



Product family features

- Microwave, PIR or light sensor
- Bluetooth NLC enabled by Silvair
- Control of D4i drivers or DALI drivers with additional DALI bus power supply
- Intended for installation to Zhaga socket 18
- Works with Inventronics D4i LED drivers

Product family benefits

- Standard communication protocol released by Bluetooth SIG
- Design freedom due to standard dimensions
- Easy to integrate in luminaire
- Minimize internal wiring in combination with D4i drivers
- Secured product communication granted by ioXT and PSA Certificates

Areas of application


- Area lighting
- Parking areas
- Cycle lanes
- City parks

Technical data

Electrical data

Nominal voltage	13,5 ... 22,5 V
Mains frequency	0 Hz
Maximum TX power	+8 dBm
Peak input current	20 mA
Average input current	10 mA
Radio frequency	2.4 GHz
Wireless protocol	Bluetooth NLC enabled by Silvair
Wireless range	40 m line of sight
Required DALI current (typical)	10 mA
Peak DALI current	30 mA
System wattage	0.30 W

Dimensions & weight

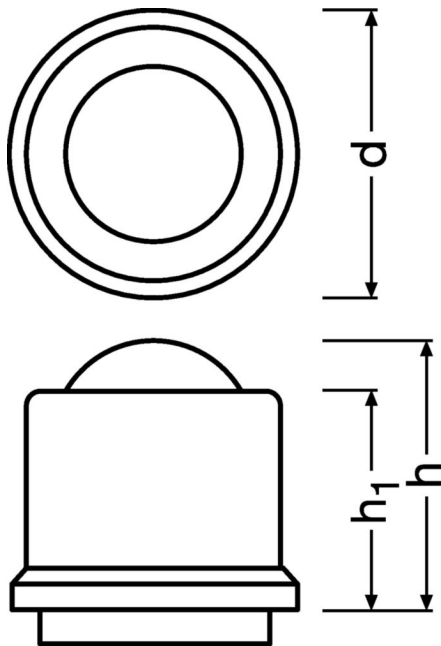

Product weight	60.00 g
Wire preparation length, input side	7...9 mm
Cable cross-section, input side	0.25...0.75 mm ²
Length	39.5 mm
Width	48.0 mm
Height	39.0 mm
Maximum allowed cable length	10
Diameter	48.0 mm

Temperatures & operating conditions

Maximum temperature at tc test point	65 °C
Ambient temperature range	-25...+60 °C
Temperature range at storage	-25...70 °C
Permitted rel. humidity during operation	0...95 %
Permitted relative humidity at storage	0...95 %

Lifespan

Lifespan	50000 h
----------	---------

Capabilities

Detection angle	+/-45° °
Dimming interface	D4i
Maximum installation height	15 m
Type of sensor	PIR
Dimmable	Yes
Type of installation	Luminaire integration
Compatibility	Works with Inventronics HubSense / Works with Inventronics DEXAL
Control output	D4i
Reset	Magnetic ¹⁾
Number of connected drivers	4
Control interface	Bluetooth NLC
Detection angle (PIR)	+/- 45° x +/- 30°

1) by magnet

Certificates & standards

Approval marks – approval	CE / D4i
Protection class	II
Type of protection	IP65

Environmental information

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Primary Article Identifier	6977078990509
Date of Declaration	12-11-2025
Declaration No. in SCIP database	In work
SCIP_STATUS	In work
SCIP_ID	

Download Data

File		
Certificates	PDF	▶ B NLC DEKRA 4912692 01 AOC 290524
CAD data 2-dim	Compressed	▶ B NLC D4I PD P Z 2PDF 4551746 221025
CAD data 2-dim	Compressed	▶ B NLC D4I PD P Z 2PDF 4551744 221025
CAD data 3-dim	Compressed	▶ B NLC D4I PD P Z 3PDF 4551746 221025
CAD data 3-dim	Compressed	▶ B NLC D4I PD P Z 3PDF 4551744 221025
CAD data	Compressed	▶ B NLC D4I PD P Z IGS 4551746 221025
CAD data	Compressed	▶ B NLC D4I PD P Z STEP 4551746 221025
CAD data	Compressed	▶ B NLC D4I PD P Z IGS 4551744 221025
CAD data	Compressed	▶ B NLC D4I PD P Z STEP 4551744 221025
Mandatory Publications	PDF	▶ B NLC D4I P Z CE 4533027 240524
User instruction	PDF	▶ G15130023_UI_B_NLC_D4I_HF_LS_PD_P_Z_03

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
6977078990509 INVENTRONICS	B NLC D4I PD P Z	Shipping carton box 50 Pieces	330 x 287 x 195 mm	18.47 dm ³	72.40 g
6977078990509 INVENTRONICS	B NLC D4I PD P Z	Shipping carton box 24 Pieces	303 x 242 x 146 mm	10.71 dm ³	99.48 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit