

## Features

- Lid with Standard Mounting Hole for ZHAGA BOOK18 Socket
- Easy assembly And Spare Accessories are Included
- Suitable for Inventronics NFS & NSS Series Drivers



## Description

The ACC-LID-NFS-xxx is lid with mounting hole for ZHAGA socket for Inventronics NFS/NSS series drivers for ZHAGA BOOK18 & D4i application.

## Models

Name	Description	Part Number
Lid and accessory set	Lid with mounting hole for Zhaga Book 18 receptacles	ACC-LID-NFS-600
Lid and accessory set	Lid with mounting hole for Zhaga Book 18 receptacles	ACC-LID-NFS-1K8

## Compatible List

Part Number	Driver Part Number	Notes
ACC-LID-NFS-600	NFS-600SxxxBC	Product Packaging Contents:  Lid with mounting hole for Zhaga Book 18 receptacles (with pre-assembled sealing washer) Accessory pack (including 5 screws + 5 retaining rings)
	NFS-900SxxxBC	
	NSS-700SxxxBC	
	NSS-1K2SxxxBC	
ACC-LID-NFS-1K8	NFS-1K2DxxxBC	
	NFS-1K8TxxxBC	
	NSS-1K5DxxxBC	
	NSS-2K1TxxxBC	

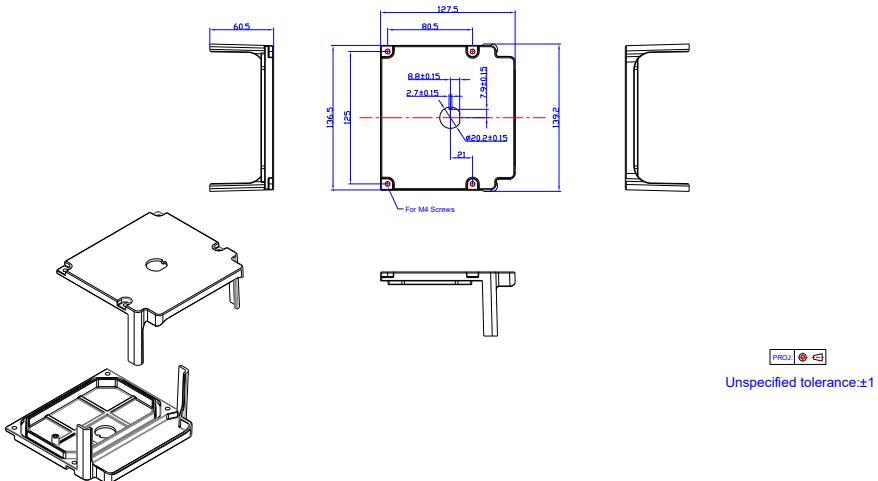
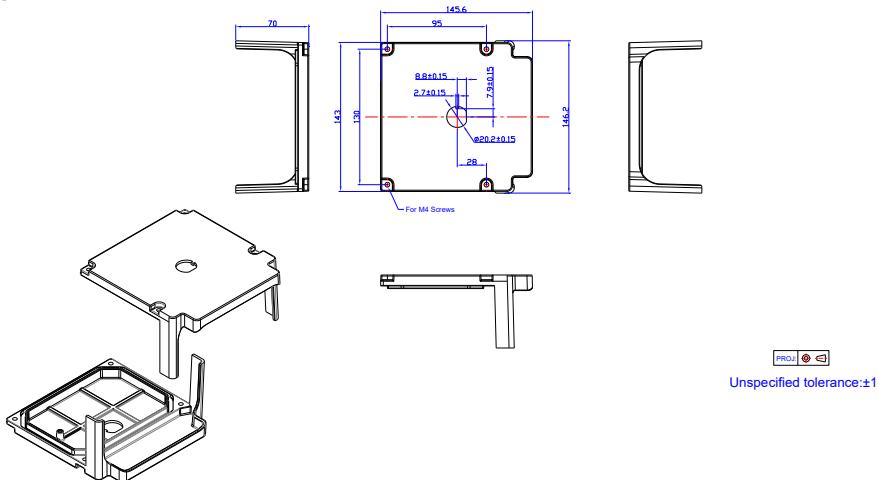
## Environmental Specifications

Parameter	Min.	Typ.	Max.	Notes
Operating Temperature	-40°C	-	+70°C	Humidity: 5%RH to 85%RH. No condensation.
Storage Temperature	-40°C	-	+85°C	Humidity: 5%RH to 85%RH. No condensation.

## General Specifications

Parameter		Min.	Typ.	Max.	Notes
Dimensions	ACC-LID-NFS-600 Inches (L x W x H) Millimeters (L x W x H)	5.02 x 5.48 x 2.38 127.5 x 139.2 x 60.5			
	ACC-LID-NFS-1K8 Inches (L x W x H) Millimeters (L x W x H)	5.73 x 5.76 x 2.76 145.6 x 146.2 x 70			
Net Weight	ACC-LID-NFS-600	-	220 g	-	
	ACC-LID-NFS-1K8	-	270 g	-	

## Mechanical Outline

**ACC-LID-NFS-600**

**ACC-LID-NFS-1K8**


## RoHS Compliance

Our products comply with reference to RoHS Directive (EU) 2015/863 amending 2011/65/EU, calling for the elimination of lead and other hazardous substances from electronic products.

## Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2025-07-17	A	Datasheet Release	/	/